

CPS Factory Sealed 20 Amp Pin and Sleeve Receptacles

Explosionproof

120-240 Vac, 20 Amp at 1 HP; 20 Amp at 24 Vdc. Dead-Front Safety Construction.

NEC/CEC:

Class I, Division 1 and 2 Groups B⁺, C, D
Class II, Division 1 and 2 Groups F, G
NEMA 3RX⁺, 7BCD

**Does not intermate with
Contender® CPS 20 Amp
Pin and Sleeve Receptacles**

Applications

- Locations where receptacles are used with stationary or portable electrically operated devices such as:
 - Lighting systems
 - Conveyors
 - Heaters
 - Motor-generator sets
 - Air conditioners
 - Compressors
 - Pumps
- Locations where damp or corrosive conditions exist.

Features

- Captive stainless steel hex head slotted screws.
- Plug mechanical cable clamps prevent strain on cables; they meet or exceed UL strain relief pull-out requirements.
- Insulators provide superior dielectric and mechanical strength and lowest arc tracking.
- Delayed action construction. Insert plug partially rotate slide on front of receptacle and insert plug fully.
- Factory sealed: external seals not required.
- CPS Series plug and receptacles are supplied with pressure terminal connectors.
- Energizes receptacle terminals deeply recessed to prevent accidental touching.

Standard Materials

- Cover: copperfree (less than 4/10ths of 1%) aluminum
- Mounting bodies: malleable iron
- Insulating blocks: fiberglass reinforced thermoset polyester
- Cover gasket and plug grommet: neoprene

Standard Finishes

- Malleable iron mounting bodies: triple-coat (1) zinc electroplate, (2) chromate and (3) epoxy powder coat
- Aluminum covers: epoxy powder coat

NEC/CEC Certifications and Compliances


- UL Standard: UL 1010 (UL 1203)
- UL Listed: E10784, E81751
- CSA Standard: C22.2 No. 25, C22.2 No. 30, C22.2 No. 159
- CSA Certified: 038644

Related Products

- For a EFSR-GFI Ground Fault Circuit Interrupter refer to the U-Line® 20 Amp Receptacles within the *Plugs and Receptacles: Hazardous Location Section*.



CPS Receptacle
15° Angle Type



CPS Receptacles
with EFD Mounting Boxes

Plugs and Receptacles

NEC/CEC CLASS/ZONE RATED HAZARDOUS LOCATION PLUGS AND RECEPTACLES

• NEMA 3X with Screw Cover Kit installed and cover full engaged.

◆ Shaded items on following page suitable for Class I, Group B in addition to Class I, Groups C and D.

CPS 20 Factory Sealed Amp Pin and Sleeve Replacement Receptacles and CPP Plugs

Explosionproof

120-240 Vac, 20 Amp at 1 HP; 20 Amp at 24 Vdc. Dead-Front Safety Construction.

NEC/CEC:
Class I, Division 1 and 2 Groups B⁺, C, D
Class II, Division 1 and 2 Groups F, G
NEMA 3RX[•], 7BCD

**Does not intermate with
Contender® CPS 20 Amp
Pin and Sleeve Receptacles**

Type	Number of Gangs	Wire/Pole	Hub Size (Inches)	Catalog Number
------	-----------------	-----------	-------------------	----------------

CPS Receptacle 15° Angle Type



Dead-End

—

2W, 3P

1/2

CPSA-2350

3/4

CPSA-2375

CPS Receptacles with EFD Mounting Boxes



CPC1

Dead-End

Single

2W, 3P

1/2

CPE1-2350

3/4

CPE1-2375

1

CPE1-23100

Feed-Thru

Single

2W, 3P

1/2


CPC1-2350

3/4

CPC1-2375

1

CPC1-23100



CPC2 †

Dead-End

Two

2W, 3P

1/2

CPE2-2350

3/4

CPE2-2375

1

CPE2-23100

Feed-Thru

Two

2W, 3P

1/2

CPC2-2350

1

CPC2-23100

3/4

CPC2-2375

CPS Replacement Receptacle and Cover Assembly



CPSR

2W, 3P

CPSR-23

Replacement Spring Cover

CPSCA

CPR Replacement Receptacle Cover Assembly Only



CPR

2W, 3P

CPR-23

Spring Cover Kit

CPRCA



NEMA 3X Corrosion Resistance Kit •

CPS233RXKIT

Description	Wire/Pole	Cable Dia. (Inches)	Catalog Number
-------------	-----------	---------------------	----------------

CPP Plugs for use with CPS Receptacles



Pressure Terminals

Plug amperes match receptacle ratings

2W, 3P

.536 to .639

CPP-2023

• NEMA 3X with Screw Cover Kit installed and cover full engaged.

† Suitable for Class I, Group C, D, Class I Div 2 Group B, C, D, Class II, Groups F, G




♦ Shaded area indicates items suitable for Class I, Group B in addition to Class I, Groups C and D.

EFD Cast Device Mounting Boxes

For CPS 20 Amp Receptacles

Single, Two, and Tandem Boxes.


*Does not intermate with
Contender® CPS 20 Amp
Pin and Sleeve Receptacles*

		Hub Size (Inches)	Catalog Number	
Type			Malleable Iron	Aluminum
Single Gang				
	Dead-End	1/2	EFD150-NL-Q	EFD150A-NL-Q
		3/4	EFD175-NL-Q	EFD175A-NL-Q
		1	EFD110-NL-Q	EFD110A-NL-Q
	Feed-Thru	1/2	EFDC150-NL-Q	EFDC150A-NL-Q
		3/4	EFDC175-NL-Q	EFDC175A-NL-Q
		1	EFDC110-NL-Q	EFDC110A-NL-Q
Two Gang				
	Dead-End	1/2	EFD250-NL-Q	EFD250A-NL-Q
		3/4	EFD275-NL-Q	EFD275A-NL-Q
		1	EFD210-NL-Q	EFD210A-NL-Q
	Feed-Thru	1/2	EFDC250-NL-Q	EFDC250A-NL-Q
		3/4	EFDC275-NL-Q	EFDC275A-NL-Q
		1	EFDC210-NL-Q	EFDC210A-NL-Q
Tandem †				
	Dead-End	1/2	EFDT50-NL-Q	
		3/4	EFDT75-NL-Q	
		1	EFDT10-NL-Q	
	Feed-Thru	1/2	EFDCT50-NL-Q	
		3/4	EFDCT75-NL-Q	
		1	EFDCT10-NL-Q	


† For tandem bodies, eternal seals must be installed within 1.52 meters (5 feet) of each conduit entrance or Class I, Group C and D.

CPS 20 Amp Factory Sealed Receptacles and CPP Plugs Dimensions

CPSA 45° Angle Type Receptacle

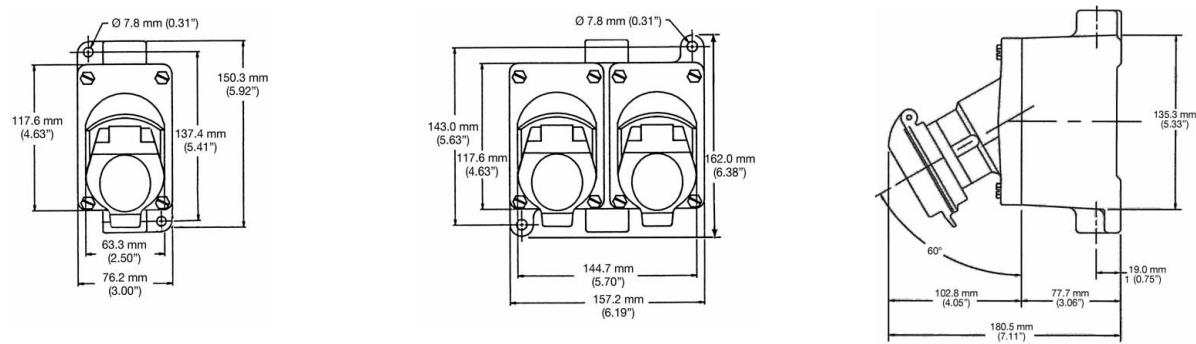

CPSA 15° Angle Type Receptacle

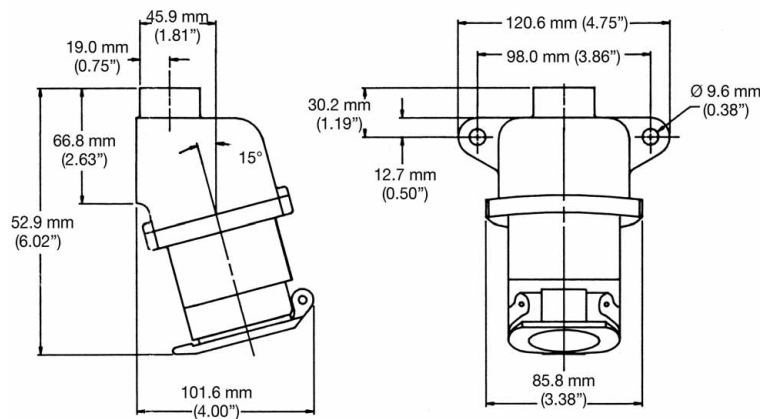

CPP Plug

