

NEW!
more on
reverse

Low Profile TV BRIDGE™ KIT

For Flush-to-the-Wall TV Installations on Walls as Shallow as 3/4"



**Roomy 5" x 8" boxes
accommodate
multiple cables...
Low-Voltage Wires
Run Behind Wall**

Low profile
recessed
boxes

Save time and money with Arlington's TV Bridge™ KIT with low profile boxes. This all-in-one package is ideal for flat screen TV installations on 1/2" or 5/8" drywall with wall cavity depths as shallow as 3/4".

Applications in new work or retrofit include:




- Furring strips on concrete block walls
- 2x2, 2x3 and 2x4 or larger studs

Using a low profile box is also helpful when plumbing or other obstructions run behind the wall.

Plus, there's lots of room inside for multiple cables, and brackets for tying them off.

- Plugs stay inside upper box so TV mounts closer to the wall
- Mounting wing screws hold boxes securely in the wall
- Kit includes all you need to install a flat screen TV close to a wall and connect it to additional components

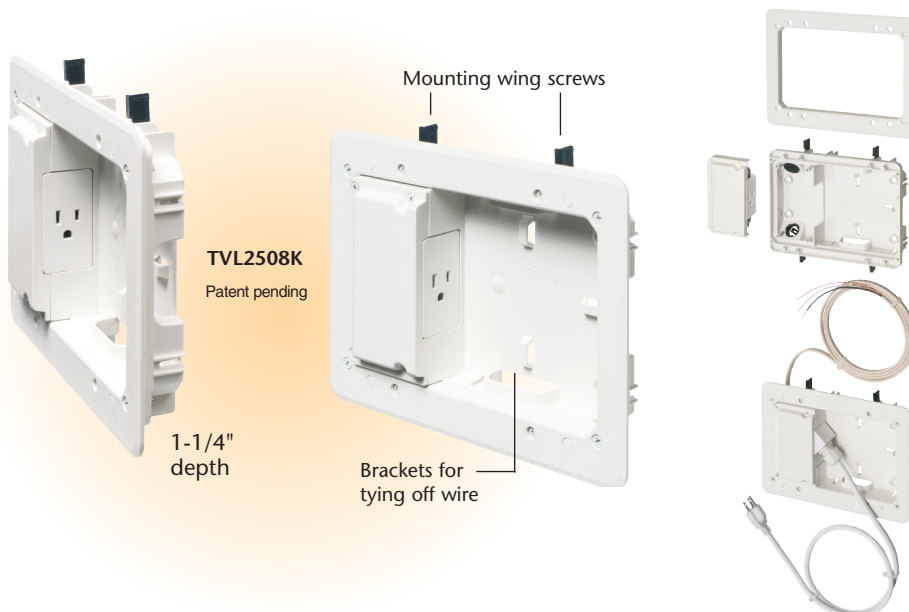

Scan for Info



Arlington



1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com



Low Profile TV BRIDGE™ KIT



For Wall Cavities as Shallow as 3/4"

Installation of the **TVL2508K Low Profile TV Bridge Kit** is quick and easy. Just cut two openings in the wall, near a power source.

There's no need to run power from a panel box or to cut into framing members.

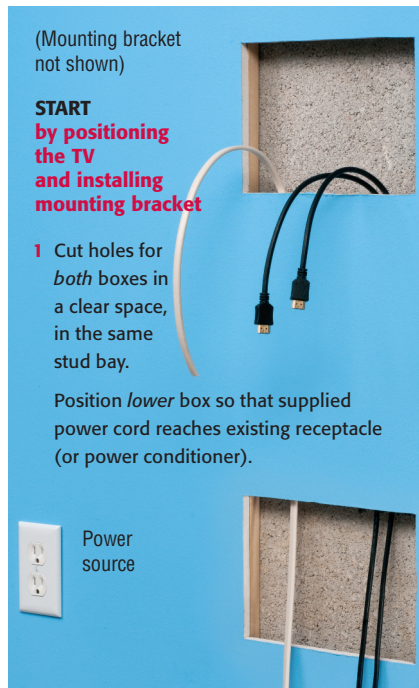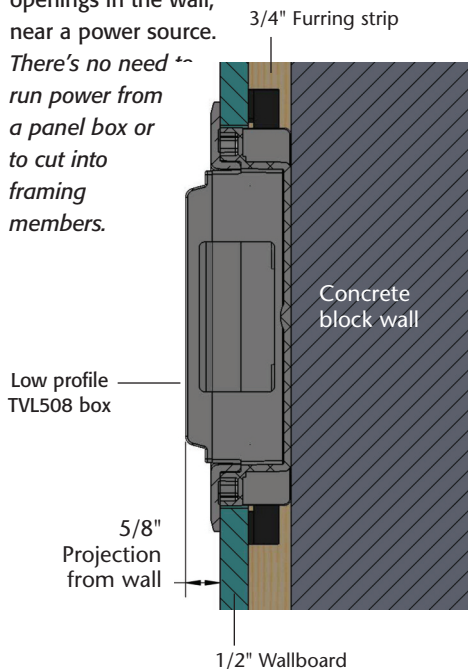

(Mounting bracket not shown)

START
by positioning the TV and installing mounting bracket

1 Cut holes for both boxes in a clear space, in the same stud bay.

Position lower box so that supplied power cord reaches existing receptacle (or power conditioner).



LOWER Box installation

2 Feed NM cable from lower box, behind the wall to upper box opening.

3 Tighten four mounting wing screws to secure box/power cord assembly to wall.

UPPER Box installation



4 Install trim plate. Pull cable through connector. To install box in hole tighten wing screws (see 3).



5 Attach electrical receptacle to receptacle mounting bracket.



6 Attach receptacle mounting bracket to box.



7 **OPTION** Attach box to block for added stability.

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description Low Profile TV Bridge	Unit/Std Pkg
TVL2508K	52305	5" x 8" power/low voltage recessed TV Bridge Kit	1
TVL2508KGC	52306	5" x 8" power/low voltage recessed TV Bridge Kit w ground clip for Canada	1



TVL2508K
Patent pending



Device & cover



7 ft cable



Arlington

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com

Scan for Info



TVL2508K

Distributed by