


Conduit & cable



Conduit Strut Clamps

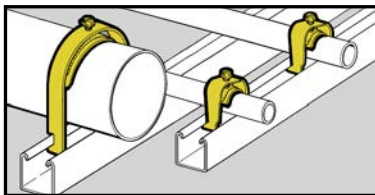

B1532S thru B1564S

B1506S
thru
B1524S



B1508
thru
B1520

- Attaches conduit, flexible conduit or cables to standard strut channels.
- B1506S designed to secure and support MC/AC cables.
- Unique one-piece design eliminates handling of hardware and allows easy installation and removal in side-by-side conduit runs.
- Anti-rock feature prevents clamp from disengaging during installation.
- Finish: Pre-Galvanized.




UPC/Part Number	Catalog Number	Conduit Size		OD Range Inches		Static Load Cap. Lbs.	Box Qty.
		EMT	Rigid	Min	Max		
78101163150	B1508	1/2"	–	–	–	200	100
78101163154	B1512	3/4"	1/2"	–	–	200	100
78101163157	B1516	1"	3/4"	–	–	300	100
78101163160	B1520	1 1/4"	1"	–	–	300	100
Note: Clamps without saddle are not recommended for flexible conduit or cable							
78205144495	B1506S*	3/8"*	–	.400	.630	200	100
78101163164	B1508S	1/2"	–	.250	.680	200	100
78101163168	B1512S	3/4"	1/2"	.500	.840	200	100
78101163171	B1516S	1"	3/4"	.750	1.050	300	100
78101163177	B1520S	1 1/4"	1"	1.125	1.315	300	100
78101163182	B1524S	1 1/2"	1 1/4"	1.375	1.660	400	50
78101163188	B1532S	2"	1 1/2"	1.875	2.200	400	50
78101163193	B1534S	–	2"	2.125	2.375	400	25
78101163199	B1540S	2 1/2"	2 1/2"	2.625	2.875	400	25
78101163205	B1548S	3"	3"	3.250	3.500	400	25
78101163211	B1556S	3 1/2"	3 1/2"	3.750	4.000	400	10
78101163215	B1564S	4"	4"	4.250	4.500	400	10

Patent #5022614

* B1506S will accept the following

AC Cable 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4
MC Cable 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4

Read safety/installation instruction sheets in packages before use.

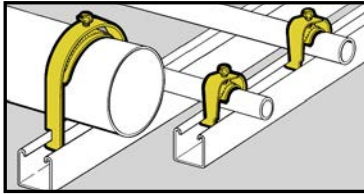

- One-piece assembled product.
- Easy removal without disconnecting adjacent clamps.
- Secure cables easily with protective saddle, preventing damage to conduit or cable.
- One-hand installation.

Conduit & cable clamps



- Clamp works on equal trade sizes for both EMT and rigid conduit.
- Attaches to cable tray rungs and strut profiles; securing conduit, flexible conduit and cable to cable tray or traditional strut and open channel side of 4Dimension™ 4D22 strut system.
- Available in Pre-Galvanized, stainless steel 316.

UPC/Part Number	Catalog Number	Conduit Size EMT & Rigid	OD Range Inches		Static Load Cap. Lbs.	Box Qty.
			Min	Max		
Pre-Galvanized steel						
79903860162	BL050	1/2"	0.65	0.89	200	100
79903860163	BL075	3/4"	0.86	1.11	200	100
79903860164	BL100	1"	1.1	1.4	200	100
79903860165	BL125	1 1/4"	1.4	1.725	200	50
79903860166	BL150	1 1/2"	1.69	1.98	200	50
79903860168	BL200	2"	1.98	2.576	200	50
79903860169	BL250	2 1/2"	2.576	3.06	350	25
79903860170	BL300	3"	3.06	3.626	350	25
79903860171	BL350	3 1/2"	3.626	4.126	350	25
79903860172	BL400	4"	4.126	4.626	350	25
Stainless steel 316						
79903860173	BL050SS6	1/2"	0.65	0.89	200	100
79903860174	BL075SS6	3/4"	0.86	1.11	200	100
79903860175	BL100SS6	1"	1.1	1.4	200	100
79903860176	BL125SS6	1 1/4"	1.4	1.725	200	50
79903860177	BL150SS6	1 1/2"	1.69	1.98	200	50
79903860178	BL200SS6	2"	1.98	2.576	200	50
79903860179	BL250SS6	2 1/2"	2.576	3.06	350	25
79903860180	BL300SS6	3"	3.06	3.626	350	25
79903860181	BL350SS6	3 1/2"	3.626	4.126	350	25
79903860182	BL400SS6	4"	4.126	4.626	350	25

Read safety/installation instruction sheets in packages before use.