


# Series 2, 3, 4, & 5 Steel - Accessories

## Splice Plates


- Standard 8-hole pattern for all steel splice plates.
- Furnished in pairs with hardware.
- One pair including hardware provided with straight section.
- Boxed in pairs with hardware.
- (\*) Insert **ZN** or **G**



Catalog No.	Height	
	in.	mm
9(*)-8004	4	101
9(*)-8005	5	127
9(*)-8006	6	152
9(*)-8007	7	178

## Expansion Splice Plates

- Expansion plates allow for one inch expansion or contraction of the cable tray, or where expansion joints occur in the support structure.
- Furnished in pairs with hardware.
- **Bonding Jumpers are required on each siderail. Order Separately.**
- (\*) Insert **ZN** or **G**




Catalog No.	Height	
	in.	mm
9(*)-8014	4	101
9(*)-8015	5	127
9(*)-8016	6	152
9(*)-8017	7	178

For heavy duty expansion splice plates see page APP-3.

## Universal Splice Plates


- Used to splice to existing cable tray systems.
- Furnished in pairs with hardware.
- (\*) Insert **ZN** or **G**



Catalog No.	Height	
	in.	mm
9(*)-8004-1/2	4	101
9(*)-8005-1/2	5	127
9(*)-8006-1/2	6	152
9(*)-8007-1/2	7	178

## Step Down Splice Plates

- These splice plates are offered for connecting cable tray sections having side rails of different heights.
- Furnished in pairs with hardware.
- (\*) Insert **ZN** or **G**




Catalog No.	Height	
	in.	mm
9(*)-8045	5 to 4	127 to 101
9(*)-8046	6 to 4	152 to 101
9(*)-8060	6 to 5	152 to 127
9(*)-8047	7 to 4	178 to 101
9(*)-8061	7 to 5	178 to 127
9(*)-8062	7 to 6	178 to 152

## Vertical Adjustable Splice Plates

- These plates provide for changes in elevation that do not conform to standard vertical fittings.
- Furnished in pairs with hardware.
- **Bonding Jumpers not required.**
- (\*) Insert **G** or **P**


Requires supports within 24" on both sides, per NEMA VE 2.



Catalog No.	Height	
	in.	mm
9(*)-8024	4	101
9(*)-8025	5	127
9(*)-8026	6	152
9(*)-8027	7	178

## Horizontal Adjustable Splice Plates

- Offered to adjust a cable tray run for changes in direction in a horizontal plane that do not conform to standard horizontal fittings.
- Furnished in pairs with hardware.
- New design bonding jumpers **not** required.
- (\*) Insert **ZN** or **G**
- (X) Insert 4, 5, 6 or 7 for side rail height.




Catalog No.	Cable Tray End Cut	Tray Width	'L'
9(*)-803(X)	Mitered	Thru 36"	N/A
9(*)-803(X)-12	Not mitered	Thru 12"	16"
9(*)-803(X)-36	Not mitered	Thru 36"	41"

Requires supports within 24" on both sides, per NEMA VE 2.

## Branch Pivot Connectors

- Branch from existing cable tray runs at any point.
- Pivot to any required angle.
- UL Classified for grounding (bonding jumper not required).
- Furnished in pairs with hardware.
- (\*) Insert **ZN** or **G**

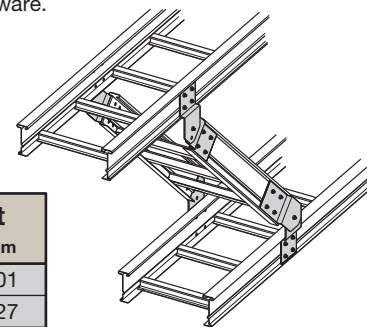



Catalog No.	Height	
	in.	mm
9(*)-8244	4	101
9(*)-8245	5	127
9(*)-8246	6	152
9(*)-8247	7	178

● Green = Fastest shipped items    ● Black = Normal lead-time items    ● Red = Normally long lead-time items

# Series 2, 3, 4, & 5 Steel - Accessories

### Cross Connector Bracket

- For field connecting crossing sections.
- Furnished in pairs with 3/8" hardware.
- (\*) Insert **ZN** or **G**

<b>Catalog No.</b>	<b>9(*)-1240</b>
--------------------	------------------


### Tray Hardware

#### Pre-Galvanized Tray Hardware

**Catalog No.** **ZN** **RNCB 3/8"-16 x 3/4" Znpl't Ribbed Neck**  
Carriage Bolt ASTM A307 Grade A


**Catalog No.** **ZN** **SFHN 3/8"-16 Znpl't Serrated Flange Hex Nut**  
ASTM A563 Grade A

**Finish:** Zinc Plated ASTM B633, SC1



### Offset Reducing Splice Plate

- This plate is used for joining cable trays having different widths. When used in pairs they form a straight reduction; when used singly with a standard splice plate, they form an offset reduction.
- Furnished as one plate with hardware.
- (‡) Insert reduction
- (\*) Insert **G** or **P**



Catalog No.	Height	
	in.	mm
<b>9(*)-8064-(‡)</b>	4	101
<b>9(*)-8065-(‡)</b>	5	127
<b>9(*)-8066-(‡)</b>	6	152
<b>9(*)-8067-(‡)</b>	7	178

#### Hot Dip Galvanized Tray Hardware

**Standard:** **Catalog No.** **CZ** **RNCB 3/8"-16 x 3/4" CZ Ribbed Neck**  
Carriage Bolt ASTM F1136-88 Grade 3 Chromium Zinc

**Catalog No.** **CZ** **SFHN 3/8"-16 CZ Serrated Flange Hex Nut**  
ASTM F1136-88 Grade A Chromium Zinc


**Optional:** **Catalog No.** **SS6** **RNCB 3/8"-16 x 3/4" SS6** AISI 316  
Stainless Steel

**Catalog No.** **SS6** **SFHN 3/8"-16 SS6** AISI 316 Stainless Steel

Example: 9G-8004SS6

### Tray to Box Splice Plates


- Used to attach the end of a cable tray run to a distribution box or control panel.
- Furnished in pairs with hardware.
- (\*) Insert **G** or **P**



Catalog No.	Height	
	in.	mm
<b>9(*)-8054</b>	4	101
<b>9(*)-8055</b>	5	127
<b>9(*)-8056</b>	6	152
<b>9(*)-8057</b>	7	178

### Frame Type Box Connector


- Designed to attach the end of a cable tray run to a distribution cabinet or control center to help reinforce the box at the point of entry.
- Furnished with tray connection hardware.
- (\*) Insert **ZN** or **G**
- (‡) Insert tray width



Catalog No.	Height	
	in.	mm
<b>9(*)-8074-(‡)</b>	4	101
<b>9(*)-8075-(‡)</b>	5	127
<b>9(*)-8076-(‡)</b>	6	152
<b>9(*)-8077-(‡)</b>	7	178

### Blind End



- This plate forms a closure for a dead end cable tray.
- Furnished as one plate with hardware.
- (\*) Insert **G** or **P**
- (‡) Insert tray width



Catalog No.	Height	
	in.	mm
<b>9(*)-8084-(‡)</b>	4	101
<b>9(*)-8085-(‡)</b>	5	127
<b>9(*)-8086-(‡)</b>	6	152
<b>9(*)-8087-(‡)</b>	7	178

### Conduit to Tray Adaptors




- Assembly required.
- Mounting hardware included.
- Conduit clamps provided.
- (‡)=Conduit size (1/2" thru 4").

<b>Catalog No.</b>	<b>● 9ZN-1150-(‡)</b>	<b>Catalog No.</b>	<b>● 9ZN-1155-(‡)</b>
--------------------	-----------------------	--------------------	-----------------------

### Conduit to Tray Adaptor

- For easy attachment of conduit terminating at a cable tray.
- Use on aluminum or steel cable trays.







Steel I-Beam

Catalog No.	Conduit Size	
	in.	mm
<b>● 9G-1158-1/2, 3/4</b>	1/2, 3/4	15, 20
<b>● 9G-1158-1, 1 1/4</b>	1, 1 1/4	25, 32
<b>● 9G-1158-1 1/2, 2</b>	1 1/2, 2	40, 50
<b>● 9G-1158-2 1/2, 3</b>	2 1/2, 3	65, 80
<b>● 9G-1158-3 1/2, 4</b>	3 1/2, 4	90, 100

### Cable Tie (Ladder Tray)

Nylon ties provide easy attachment of cable to ladder rungs; maximum cable O.D. of 3" (76mm).

Overall Length 15"

<b>Catalog No.</b>	<b>● 99-2125-15</b>
--------------------	---------------------



● Green = Fastest shipped items    ● Black = Normal lead-time items    ● Red = Normally long lead-time items

Series 2, 3, 4, & 5 Steel

# Series 2, 3, 4, & 5 Steel - Accessories

## Ladder Drop-Out




- Specially-designed Ladder Drop-Outs provide a rounded surface with 4" (101 mm) radius to protect cable as it exits from the cable tray, preventing damage to insulation. The drop-out will attach to any desired rung.
- (\*) Insert **P** or **G**
- (‡) Insert tray width



**Catalog No.** 9(\*)-1104-(‡)

## Trough Drop-Out & Drop-Out Bushing

- These devices provide a rounded surface to protect cable as it exits from the trough-type cable tray.
- Hardware is included for attachment to the trough bottom.
- (\*) Insert **P** or **G**
- (‡) Insert tray width



**Catalog No.**  
99-1124


**Catalog No.**  
9(\*)-1104T-(‡)

Snap-In Plastic Bushing    Trough-Type Drop-Out

## Barriers

### Straight Section

- Standard length: 120" (3 m) 144" (12 ft.).
- Order catalog number based on loading depth.
- Furnished with four #10 x 1/2" plated self-drilling screws and a 99-9982 splice.
- (\*) Insert **P** or **G**

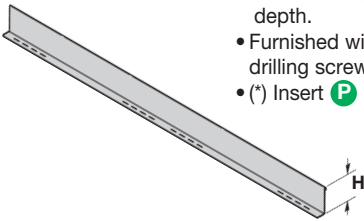


Catalog No.	Side Rail Height		Loading Depth 'H'	
	in.	mm	in.	mm
73(*)-Length	4	101	3	76
74(*)-Length	5	127	4	101
75(*)-Length	6	152	5	127
76(*)-Length	7	178	6	152

Length =  
144 for 12'  
or  
120 for 10'

### Horizontal Bend


- Horizontal Bend Barriers are flexible in order to conform to any horizontal fitting radius. Cut to length.
- Order catalog number based on loading depth.
- Furnished with three #10 x 1/2" zinc plated self-drilling screws and a 99-9982 Barrier Strip Splice.
- Standard length is 72" (6 ft.), sold individually.
- (\*) Insert **P** or **G**

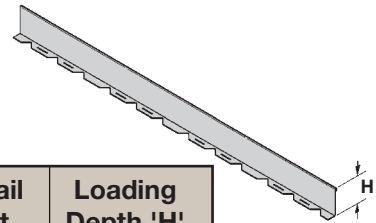

Catalog No.	Side Rail Height		Loading Depth 'H'	
	in.	mm	in.	mm
73(*)-90HBFL	4	101	3	76
74(*)-90HBFL	5	127	4	101
75(*)-90HBFL	6	152	5	127
76(*)-90HBFL	7	178	6	152

### Vertical Bend Barriers



- Vertical Bend Barriers are preformed to conform to a specific vertical fitting.
- Furnished with three #10 x 1/2" plated self-drilling screws and a 99-9982 Barrier Strip Splice.
- (\*) Insert **P** or **G**
- (\*\*) Insert 30, 45, 60 or 90 for degrees
- (†) Insert 12, 24, 36 or 48 for radius

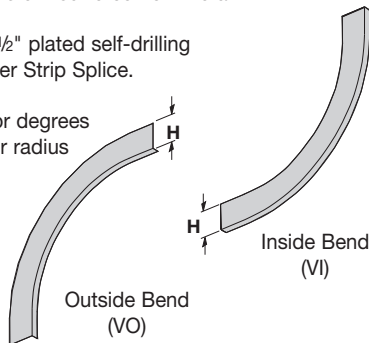

Inside Bend Catalog No.	Outside Bend Catalog No.	Side Rail Height		Loading Depth 'H'	
		in.	mm	in.	mm
73(*)-(**)VI(†)	73(*)-(**)VO(†)	4	101	3	76
74(*)-(**)VI(†)	74(*)-(**)VO(†)	5	127	4	101
75(*)-(**)VI(†)	75(*)-(**)VO(†)	6	152	5	127
76(*)-(**)VI(†)	76(*)-(**)VO(†)	7	178	6	152

### Barrier Strip Clip



- Zinc plated steel barrier clip fastens to either aluminum or steel ladder rung.
- Furnished with one #10 x 1/2" zinc plated self-drilling screw.



**Catalog No.** ● 9ZN-9002

### Barrier Strip Splice

- Plastic splice holds adjoining barrier strips in straight alignment.
- 5" (127mm) long.




**Catalog No.** ● 99-9982

● Green = Fastest shipped items    ● Black = Normal lead-time items    ● Red = Normally long lead-time items

# Series 2, 3, 4, & 5 Steel - Accessories



## Stainless Steel Cable Clamp

- Fits with series 2, 3, 4 & 5 standard steel rungs.
- Shipped flat. Field form around the cable at the time of installation.



Refer to Section CF  
Cable Fixing


Catalog No.	Cable Size	
	in.	mm
● 9SS4-4050	0.50 - 0.75	13 - 19
● 9SS4-4075	0.75 - 1.00	19 - 25
● 9SS4-4100	1.00 - 1.25	25 - 32
● 9SS4-4125	1.25 - 1.50	32 - 38
● 9SS4-4150	1.50 - 1.75	38 - 45
● 9SS4-4175	1.75 - 2.00	45 - 51
● 9SS4-4200	2.00 - 2.25	51 - 57
● 9SS4-4225	2.25 - 2.50	57 - 64
● 9SS4-4250	2.50 - 2.75	64 - 70
● 9SS4-4275	2.75 - 3.00	70 - 76
● 9SS4-4300	3.00 - 3.25	76 - 82
● 9SS4-4325	3.25 - 3.50	82 - 89
● 9SS4-4350	3.50 - 3.75	89 - 95
● 9SS4-4375	3.75 - 4.00	95 - 102
● 9SS4-4400	4.00 - 4.25	100 - 106
● 9SS4-4425	4.25 - 4.50	106 - 113
● 9SS4-4450	4.50 - 4.75	113 - 121
● 9SS4-4475	4.75 - 5.00	121 - 125



## Bonding Jumper

Use at each expansion splice and where the cable tray is not mechanically/electrically continuous to ground.

- Sold individually.
- Hardware included.
- See table 392.7(B)(2) on page CTS-9 for amperage ratings required to match the UL cross-sectional area of the tray.
- See tray loading chart for UL cross-sectional area.
- Bonding jumper is 16" long.




Catalog No.	Copper Wire Size	Ampacity
● 99-N1	#1	600

## Grounding Clamp

B-Line Cable Tray is UL® classified as to its suitability as an equipment grounding conductor. If a separate conductor for additional grounding capability is desired, B-Line offers this clamp for bolting the conductor at least once to each cable tray section.


- Accepts #6 AWG to 250 MCM.



Item	Material	Catalog No.
Grounding Clamp	Tin Plated Aluminum	● 9A-2130

## Ground Clamp


- Mechanically attaches grounding cables to cable tray.
- Hardware included.
- (\*) Insert **ZN** or **SS4**



Catalog No.	Cable Size
9(*)-2351	#1 thru 2/0
9(*)-2352	3/0 thru 250 MCM

## Hanger Rod Clamp


- For 1/2" ATR.
- Furnished in pairs.
- Order ATR and hex nuts separately.
- Two-piece "J"-hanger design.
- (\*) Insert **ZN** or **G**
- 1500 lbs./pair capacity safety factor 3.



Catalog No.	Rail Height	
	in.	mm
9(*)-5324	4	101
9(*)-5325	5	127
9(*)-5326	6	152
9(*)-5327	7	178

## Threaded Rod (ATR) & Rod Coupling

Size	Loading lbs	Catalog No.	Available Lengths	Coupling Cat. No.
3/8-16	730	● ATR 3/8 x Length	36", 72", 120", 144"	● B655-3/8
1/2-13	1350	● ATR 1/2 x Length	36", 72", 120", 144"	● B655-1/2

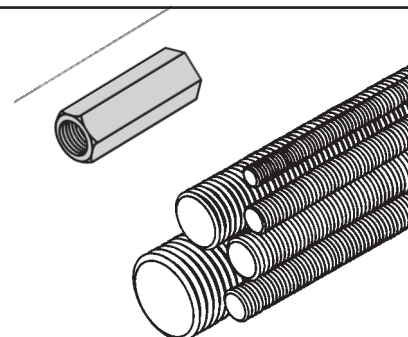

Loading based on safety factor 5.

Standard Finish: Zinc Plated.

See B-Line Strut Systems Catalog for other sizes and finishes.


● Green = Fastest shipped items    ● Black = Normal lead-time items    ● Red = Normally long lead-time items

# Series 2, 3, 4, & 5 Steel - Accessories


## Cable Tray Clamp/Guide

- Features a no-twist design.
- Has four times the strength of the traditional design.
- Each side is labeled to ensure proper installation.
- Furnished in pairs, with or without hardware.
- Not recommended for vertical support.

9ZN-1204 shown.  
Installed as a  
guide.

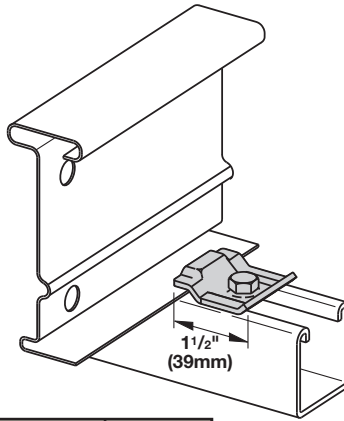

9ZN-1208 shown.  
Installed as a  
clamp.

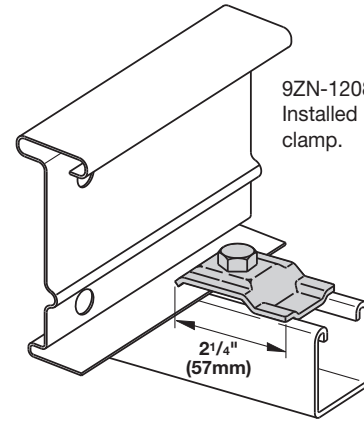

Catalog No.		Overall Length in. mm	Hardware Size	Finish
Without Hardware	With Hardware			
● 9ZN-1204	● 9ZN-1204NB	1 1/2 38	1/4"	G90
● 9ZN-1208	● 9ZN-1208NB	2 1/4 57	3/8"	G90
● 9A-1205	--	2 1/4 57	1/2"	Alum.
● 9G-1205	--	2 1/4 57	1/2"	HDGAF
● 9SS6-1205	--	2 1/4 57	1/2"	316SS
● 9ZN-1205	--	2 1/4 57	1/2"	G90



Note: For heavy duty or vertical applications see 9(\*)-1241 or 9(\*)-1242 page HDS-18.

When installing this device as an expansion guide on the outside flange of *Steel Side Rail*, use the Catalog No. **B202** Square Washer in order to properly elevate the guide.

Patent #  
RE35479

## Cable Tray Guide


- Expansion guide for single or double cable tray runs.
- Guide allows for longitudinal movement of the cable tray.
- No field drilling of support I-beam or channel is required.
- Guides are required on both sides of cable tray to prevent lateral movement - can be placed on either the inside or outside flange of cable tray.
- Guides are sold in pieces - two guides are required per tray.
- Maximum flange thickness 1 1/8" (28.58 mm).

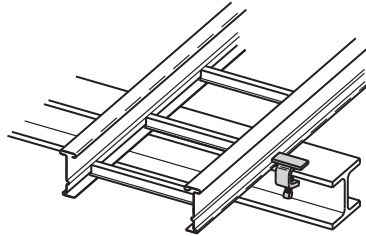

Catalog No.	Finish
● 9ZN-1249	Zinc Plated
● 9G-1249	HDGAF

## Nylon Pad


- Use for friction reduction.
- Hardness: Shore D80.
- Low friction coefficient.
- UV resistant.
- Excellent weatherability.
- UL-94HB.

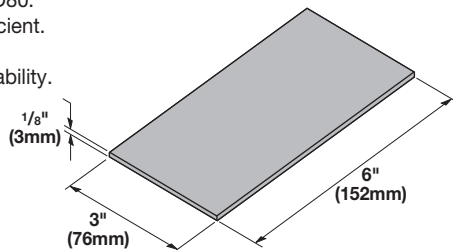

Catalog No. ● 99-PE36

## Neoprene Roll

- Used for material isolation.
- 1/8" x 2" x 25' roll.
- Hardness: Shore A60.
- Good weatherability.



Catalog No. ● 99-NP300

● Green = Fastest shipped items    ● Black = Normal lead-time items    ● Red = Normally long lead-time items



# Series 2, 3, 4, & 5 Steel - Accessories


## Trapeze Support Kit

B-Line trapeze kits provide the components required for a single trapeze support in one package. These kits are available in pre-galvanized steel with zinc-plated hardware or hot dip galvanized steel with 316 stainless steel hardware.

The SH channel provides the convenience of pre-punched slots, which eliminate the need for field drilling.

The illustrated hardware is sealed in a plastic bag and boxed with the channel, which is pre-cut to the appropriate length as shown in the chart.

Designed for use with 1/2" threaded rod. Order rod separately.

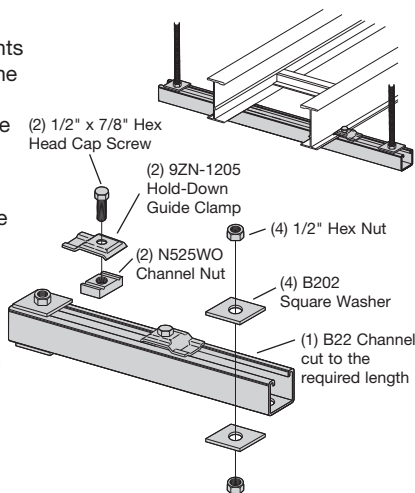

Catalog No.	Tray Width		Channel Length		Uniform Load	
	in.	mm	in.	mm	lbs	kN
● 9P-5506-22SH(†)	6	152	16	406	1600	7.11
● 9P-5509-22SH(†)	9	229	18	457	1250	5.56
● 9P-5512-22SH(†)	12	305	22	559	1125	5.00
● 9P-5518-22SH(†)	18	457	28	711	865	3.85
● 9P-5524-22SH(†)	24	610	34	864	700	3.11
● 9P-5530-22SH(†)	30	762	40	1016	590	2.62
● 9P-5536-22SH(†)	36	914	46	1168	510	2.27
● 9P-5542-22SH(†)	42	1067	52	1321	450	2.00

• (†) Insert 3/8 for 3/8" threaded rod hardware.

Safety factor of 3.0 on all loads.


## Heavy Duty Trapeze Support Kit

B-Line trapeze kits provide the components required for a single trapeze support in one package. These kits are available in Dura-Green® epoxy coated steel with zinc-plated hardware or hot dip galvanized steel with 316 stainless steel hardware.

The SH channel provides the convenience of pre-punched slots, which eliminates the need for field drilling.

The illustrated hardware is sealed in a plastic bag and boxed with the channel, which is pre-cut to the appropriate length as shown in the chart.

Designed for use with 1/2" threaded rod. Order rod separately.

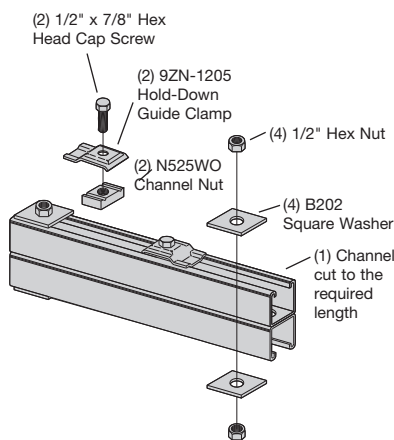


Catalog No.	Tray Width		Channel Length		Uniform Load	
	in.	mm	in.	mm	lbs	kN
9(*)-5506-22SHA	6	152	16	406	1350	6.01
9(*)-5509-22SHA	9	229	18	457	1350	6.01
9(*)-5512-22SHA	12	305	22	559	1350	6.01
9(*)-5518-22SHA	18	457	28	711	1350	6.01
9(*)-5524-22SHA	24	610	34	864	1350	6.01
9(*)-5530-22SHA	30	762	40	1016	1350	6.01
9(*)-5536-22SHA	36	914	46	1168	1350	6.01
9(*)-5542-22SHA	42	1067	52	1321	1350	6.01

• (\*) Insert **GRN** or **G**

Safety factor of 3.0 on all loads.

## Trapeze Hardware Kit



Catalog No.	● 9ZN-5500-1/2	● 9G-5500-1/2
In plastic bag	1 pr. 9ZN-1205 2 HHC Screw 1/2 x 7/8 ZN 2 N525 WO ZN 4 B202 ZN 1/2" sq washer 4 HN 1/2 ZN	1 pr. 9G-1205 2 HHC Screw 1/2 x 7/8 SS6 2 N525 WO SS6 4 B202 HDG 1/2" sq washer 4 HN 1/2 SS6

## Rooftop Support Bases with B22 Channel

Designed as a superior rooftop support for cable tray, UV resistant and approved for most roofing material or other flat surfaces.

Can be used with any of B-Line cable tray clamps and guides.

Ultimate Load Capacity:  
1,000 lbs. (uniform load)



Catalog No.	Height x Width x Length
● DB10-28	5 5/8" x 6" x 28.0"
● DB10-36	5 5/8" x 6" x 36.0"
● DB10-42	5 5/8" x 6" x 42.0"
● DB10-50	5 5/8" x 6" x 50.0"
● DB10-60	5 5/8" x 6" x 60.0"

♻️ LEEDS credit available, base made from 100% recycled material.


General Note: Consult roofing manufacturer or engineer for roof load capacity. The weakest point may be the insulation board beneath the rubber membrane.

● Green = Fastest shipped items    ● Black = Normal lead-time items    ● Red = Normally long lead-time items

# Series 2, 3, 4, & 5 Steel - Accessories


## Center Hung Cable Tray Support

- Center Hung Cable Tray Support allows cable to be laid-in from both sides.
- Eliminates costly cable pulling and field cutting of cable tray supports. Labor costs are dramatically reduced.
- Required hardware and threaded rod material for trapeze assemblies are reduced by 50%.
- Designed for use with 1/2" threaded rod. (Order rod separately)
- Use with all aluminum and steel cable trays through 24" width.
- Load capacity is 700 lbs. per support. Safety factor of 3.0. Eccentric loading is not to exceed a 60% vs. 40% load differential.
- The maximum recommended unsupported span length is 144"/12 ft. (3.66 m).
- Hardware shown is furnished.

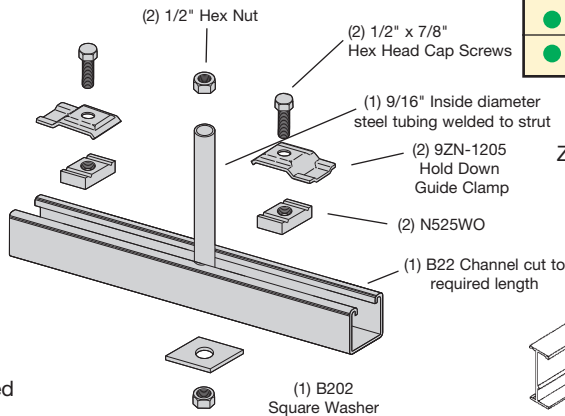


Catalog No.	Tray Width	Channel Length
● 9ZN-5212	6", 9", 12"	18"
● 9ZN-5224	18", 24"	30"

ZN = Zinc Plated

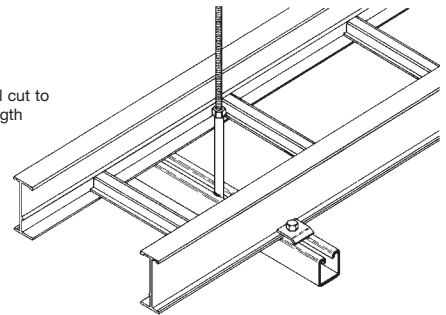


## Center Hung Support Hardware Kit



Catalog No.	● 9ZN-5200
In plastic bag	1 pr. 9ZN-1205 2 HHC Screw 1/2 x 7/8 ZN 2 N525 WO ZN 1 B202 ZN 1/2" sq washer 2 HN 1/2 ZN


## Bracket



Finishes available: **ZN** **GRN** or **HDG**  
Safety Load Factor 2.5

Catalog No.	Uniform Load		Tray Width		'A'	
	lbs	kN	in.	mm	in.	mm
B494-12	1580	7.02	6 & 9	152 & 229	12	305
B494-18	1000	4.45	12	305	18	457
B494-24	996	4.43	18	457	24	610

## Bracket

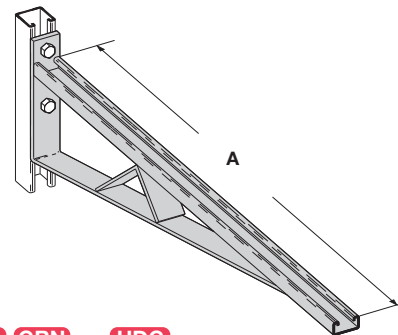


Finishes available: **ZN** **GRN** or **HDG**

Catalog No.	Uniform Load		Tray Width		'A'	
	lbs	kN	in.	mm	in.	mm
B494-30	924	4.11	24	610	30	762
B494-36	864	3.84	30	762	36	914
B494-42	580	2.58	36	914	42	1067
B494-48	500	2.22	42	1067	48	1219

● Green = Fastest shipped items    ● Black = Normal lead-time items    ● Red = Normally long lead-time items

# Series 2, 3, 4, & 5 Steel - Accessories


## Cantilever Bracket



Finishes available: **ZN** **GRN** or **HDG**  
Safety Load Factor 2.5

Catalog No.	Uniform Load		Tray Width		'A'	
	lbs	kN	in.	mm	in.	mm
<b>B409-12</b>	960	4.27	6 & 9	152 & 229	12	305
<b>B409-18</b>	640	2.84	12	305	18	457
<b>B409-24</b>	480	2.13	18	457	24	610

## Cantilever Bracket




Finishes available: **ZN** **GRN** or **HDG**  
Safety Load Factor 2.5

Catalog No.	Uniform Load		Tray Width		'A'	
	lbs	kN	in.	mm	in.	mm
<b>B297-12</b>	1660	7.37	6 & 9	152 & 229	12	305
<b>B297-18</b>	1100	4.88	12	305	18	457
<b>B297-24</b>	835	3.71	18	457	24	610
<b>B297-30</b>	625	2.78	24	610	30	762
<b>B297-36</b>	550	2.44	30	762	36	914
<b>B297-42</b>	465	2.06	36	914	42	1067

## Underfloor Support (U-Bolts not included)

U-Bolt Size	Fits Pipe O.D.
B501-3/4	.841 - 1.050
B501-1	1.051 - 1.315
B501-1 1/4	1.316 - 1.660
B501-1 1/2	1.661 - 1.900
B501-2	1.901 - 2.375
B501-2 1/2	2.376 - 2.875




- Order properly sized U-Bolts separately.

Finish available: ZN  
Safety Load Factor 2.5

Catalog No.	Uniform Load		Tray Width		'A'	
	lbs	kN	in.	mm	in.	mm
<b>B409UF-12</b>	800	3.55	6 & 9	152 & 229	12	305
<b>B409UF-21</b>	450	2.00	12 & 18	305 & 457	21	533

## Vertical Hanger Splice Plates


- (\*) Insert **ZN** or **G**
- Design load is 1500 lbs/pair. Safety Factor of 2.5
- Furnished in pairs.
- Hole size: 9/16" (14mm) for 1/2" threaded rod.

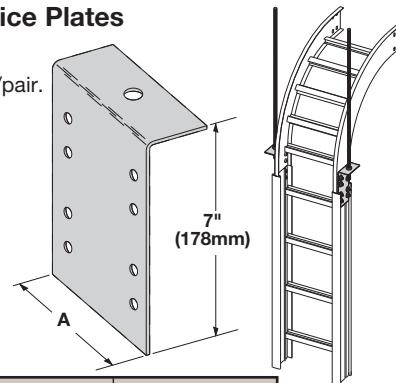

Catalog No.	Outside Cable Tray Ht.	'A'	
		in.	mm
<b>9(*)-8224</b>	4"	2.84	85.34
<b>9(*)-8225</b>	5"	3.73	110.74
<b>9(*)-8226</b>	6"	4.84	136.14
<b>9(*)-8227</b>	7"	5.84	161.54

## Heavy Duty Hold-Down Bracket


- Design load is 2000 lbs/pair.
- Two bolt design.
- Sold in pairs.
- 3/8" cable tray attachment hardware provided.
- 1/2" support attachment hardware **not** provided.
- (\*) Insert **ZN** or **G**
- Recommended for the support of vertical trays.




Catalog No. 9(\*)-1241

## Heavy Duty Hold-Down Bracket

- Design load is 4000 lbs/pair.
- Four bolt design.
- Sold in pairs.
- 3/8" cable tray attachment hardware provided
- 1/2" support attachment hardware **not** provided.
- (\*) Insert **ZN** or **G**
- Recommended for the support of vertical trays.



Catalog No. 9(\*)-1242

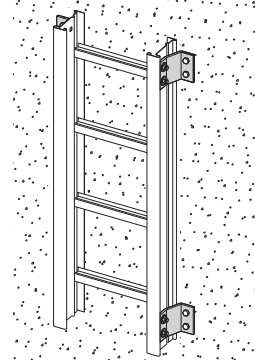


● Green = Fastest shipped items ● Black = Normal lead-time items ● Red = Normally long lead-time items



# Series 2, 3, 4, & 5 Steel - Accessories

## Beam Clamp

- Finishes available: **ZN** or **HDG**
- Sold in pieces.




Design load when used in pairs.  
Safety Load Factor 5.0

Catalog	Design Load*		'A'	
	lbs	kN	in.	mm
B441-22	1200	5.34	3 <sup>3</sup> / <sub>8</sub>	86
B441-22A	1200	5.34	5	127


## Beam Clamp B355

- Finishes available: **ZN** **GRN** **HDG** or **SS4**
- Sold in pieces.
- Design load is 1200 lbs. when used in pairs.
- Safety Load Factor 5.0
- Order HHCS and Channel Nuts separately.

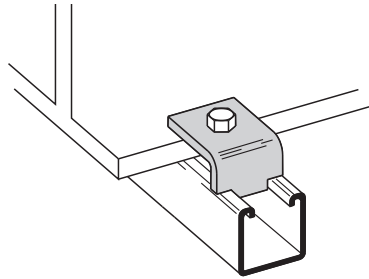

## Beam Clamp

- Finishes available: **ZN** **GRN** or **HDG**
- Sold in pieces.




Design load when used in pairs.  
Safety Load Factor 5.0

Cat. No.	B212-1/4	B212-3/8
Design Load *	600 lbs. 2.67 kN	1000 lbs. 4.45 kN
Max. Flange Thick	3/4" 19 mm	1 1/8" 28.6 mm
Mat'l. Thickness	1/4" 6.3 mm	3/8" 9.5 mm

## B305 Thru B308 & B321 Series Beam Clamps


- Finishes available: **ZN** or **HDG**
- Setscrew included.
- Safety Load Factor 5.0

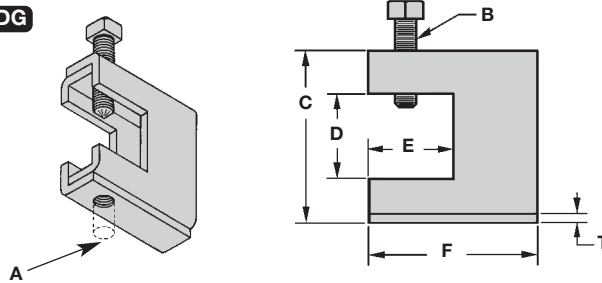

Cat. No.	Rod Size A	B	C	D	E	F	T	Design Load	
								lbs	kN
B305	3/8"-16	3/8"-16	2 5/16"	7/8"	1 1/8"	2 1/2"	11 Ga.	600	2.67
B306	3/8"-16	1/2"-13	2 7/16"	7/8"	1 1/8"	2 1/2"	7 Ga.	1100	4.90
B307	1/2"-13	1/2"-13	2 7/16"	7/8"	1 1/8"	2 1/2"	7 Ga.	1100	4.90
B308	1/2"-13	1/2"-13	2 9/16"	7/8"	1 1/8"	2 1/2"	1/4"	1500	6.68
B321-1	3/8"-16	1/2"-13	3 9/16"	1 11/16"	1 5/8"	3 1/4"	1/4"	1300	5.79
B321-2	1/2"-13	1/2"-13	3 9/16"	1 11/16"	1 5/8"	3 1/4"	1/4"	1400	6.23

## B312 Anchor Strap

- Finish available: **ZN**
- For a maximum beam thickness of 3/4".
- For thicker beams, step up one flange width size.




Cat. No.	Flange Width
B312-6	Up to 6"
B312-9	6" - 9"
B312-12	9" - 12"

## Beam Clamp

Catalog No.	For Flange Width		Wt./C	
	in.	mm	lbs	kg
B750-J4	3" - 6"	76.2 - 152.4	109	49.4
B750-J6	5" - 9"	127.0 - 228.6	124	56.2
B750-J9	8" - 12"	203.2 - 304.8	135	61.2
B750-J12	11" - 15"	279.4 - 381.0	147	66.7


- Finish available: **ZN**
- Design Load 500 lbs. (2.22 kN)
- Safety Load Factor 5.0
- Recommended torque: 'J'-Hook Nut 125 In.-Lbs. (14.1 kN/m)
- Maximum flange thickness of 3/4"

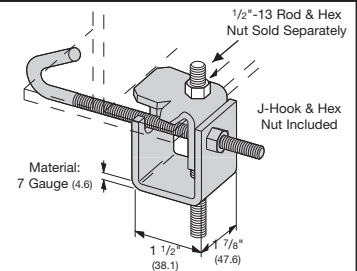

## Beam Clamp

Catalog No.	'A'		Thread Length 'TL'		Wt./C	
	in.	mm	in.	mm	lbs	kg
B700-J4	8 1/2"	215.9	5"	127.0	44	19.9
B700-J6	11 1/2"	292.1	6"	152.4	53	24.0
B700-J9	12 1/4"	368.3	6"	152.4	63	28.6
B700-J12	17 1/2"	444.5	6"	152.4	78	35.4

- Finish available: **ZN**
- Hex Nut included.

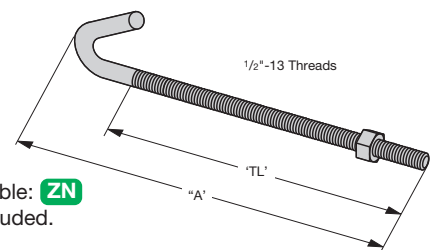

● Green = Fastest shipped items ● Black = Normal lead-time items ● Red = Normally long lead-time items