

**TABLE OF CONTENTS**

**HYGROUND® Irreversible Compression Grounding**

	<b>HYGROUND® Features &amp; Benefits</b>	<b>E-5, E-6</b>
	Type YGL-C	E-7
	Type YGLR-C	E-8
	Type YGHP-C	E-9
	Type YGHP-C	E-10
	Type YGHC-C	E-11
	Type YGC	E-12
	Type YSHG	E-13
	Type YGHR-C	E-14
	Type YGHR-C	E-15
	Type YGHA	E-16
	Type YGA	E-17
	<b>GROUND TAB</b>	<b>E-18</b>
	Type YGHS	E-19
	Type YGS	E-20
	Type YGF	E-21
	Type YGIB	<b>E-22, E-23</b>
	Type GSTUD-HY	E-24
	Types YGT, YTTAG	E-25
	Type YG-B	E-26

E-1

**⚡ Lightning Protection Info.**

Basic rules for selection are:




































1. Must be like material to the conductor.
2. Two bolts to ground rod—minimum, for mechanical.
3. Cable to cable connections can be installed with one bolt, two bolt, or compression means.
4. Cable to steel structure must have 8 in.<sup>2</sup> contact with steel.
5. Heavy duty stacks—mechanical only.
6. On all connectors with heavy duty stack rating, we must offer 1/16" thick lead plating as an option. The reason is closest 25 ft. to stack opening must use lead coated product.
7. UL 96 Listing.

Blue highlighted items are industry standard and most frequently ordered.

**TABLE OF CONTENTS**

**Mechanical Grounding**

E-2

	Types <b>KC, K2C</b>	E-27		Types <b>GRC, GCRT1/0, GRL</b>	E-51
	Type <b>KCKF</b>	E-28		<b>Braid Information</b>	E-52, E-53
	Types <b>KC-J, EQC632</b>	E-29		Type <b>B</b>	E-54 - E-56
	Type <b>KS</b>	E-29		Types <b>GB, GBM, GC, GCM</b>	E-57
	Types <b>GKA, KP</b>	E-30		Types <b>GL, GZ</b>	E-58
	Types <b>CL50-1, CL50-1TN, CL</b>	E-31		Type <b>GC-CT</b>	E-59
	<b>WILEY PV Solutions</b>	E-32, E33		Type <b>GIE-G</b>	E-60
	Type <b>GAR</b>	E-34, E-35		Type <b>GCB63T13G1</b>	E-61
	Types <b>GAR-BU, GAR3902, GAR-RB</b>	E-36		<b>Static Discharge Reels</b>	E-62
	Type <b>GAR-TC</b>	E-37		<b>Rail Connectors</b>	E-63
	Type <b>GD</b>	E-38		Types <b>QGFL, GA-H</b>	E-64
	Type <b>GP</b>	E-39		Raised Floor Ground Connectors	
	Type <b>GK</b>	E-40		<b>SUPER-CLAMP™ (Type GXP)</b>	E-65
	<b>BONDIT® Intersystem Bonding</b>	E-41		<b>UNIGROUND™ (Type GRF)</b>	E-66
	<b>BONDIT® Intersystem Bonding</b>	E-42		Types <b>GP-G1, GP-RT</b>	E-67
	<b>Water Pipe Grounding</b>	E-43 - E-47		<b>Bus Bar (Type BBB)</b>	E-68, E-69
	Type <b>GC-A</b>	E-48		Type <b>BWB680 Series Pool Water Bonding Kit</b>	E-70
	Type <b>GG</b>	E-49			
	Types <b>GQ, GX</b>	E-50			

Blue highlighted items are industry standard and most frequently ordered.

**TABLE OF CONTENTS (continued)**

**BURNDYWeld® Exothermic Grounding**

<b>QIKLITE® BURNDYWeld®</b> Battery Ignition System	<b>E-71</b>	Type <b>BCR-2</b> Molds Horizontal Cable to Ground Rod	<b>E-82</b>	Type <b>BCS-4</b> Molds Vertical through Cable to Vertical Steel Surface	<b>E-90</b>
<b>BURNDYWeld® Introduction</b>	<b>E-72</b>				
<b>Making a BURNDYWeld®</b> <b>Connection</b>	<b>E-73</b>	Type <b>BCR-3</b> Molds Horizontal through Cable to Ground Rod	<b>E-83</b>	Type <b>BCS-6</b> Molds Horizontal through Cable to Vertical Steel Surface	<b>E-91</b>
<b>BURNDYWeld® Weld Metal</b>	<b>E-74</b>	Type <b>BCR-17</b> Molds Horizontal Run and Tap Cables to Ground Rod	<b>E-84</b>	Type <b>BCS-7</b> Molds Overhead Vertical Tap Cable to Vertical Steel Surface	<b>E-91</b>
Type <b>BCC-1</b> Molds Horizontal End to End	<b>E-75</b>				
Type <b>BCC-2</b> Molds Horizontal Cable Tap to Horizontal Cable Run	<b>E-76</b>	Type <b>BCR-24</b> Molds Horizontal Parallel Run Cables to Ground Rod	<b>E-85</b>	Type <b>BCS-18</b> Molds Horizontal Tap Cable to Vertical Steel Surface	<b>E-92</b>
Type <b>BCC-4</b> Molds Horizontal to Horizontal Cable Cross	<b>E-77</b>	<b>SINGLE SHOT MOLDS</b>	<b>E-86</b>	Type <b>BCS-5</b> Molds Horizontal Cable Tap to Horizontal Cast Iron Surface	<b>E-92</b>
Type <b>BCC-11</b> Molds Horizontal to Horizontal Cable Cross	<b>E-78</b>	Type <b>BCS-1</b> Molds Horizontal Cable to Horizontal Steel Surface	<b>E-87</b>	Type <b>BCRE-1</b> Molds Horizontal Parallel Tap to Rebar	<b>E-93</b>
Type <b>BCC-6</b> Molds Horizontal Parallel Tap	<b>E-79</b>	Type <b>BCS-8</b> Molds Horizontal Cable to Horizontal Steel Surface	<b>E-87</b>	Type <b>BCRE-2</b> Molds Horizontal Parallel Tap to Horizontal Rebar Run	<b>E-94</b>
Type <b>BCC-14</b> Molds Horizontal Parallel through Cables	<b>E-79</b>	Type <b>BCS-2</b> Molds Horizontal through Cable to Horizontal Steel Surface	<b>E-88</b>	Type <b>BCRE-3</b> Molds Horizontal through Cable to Vertical Rebar	<b>E-95</b>
Type <b>BCC-7</b> Molds Horizontal Parallel through Cables	<b>E-80</b>	Type <b>BCS-9</b> Molds Horizontal Cable to Horizontal Steel Surface	<b>E-88</b>	Type <b>BCRE-4</b> Molds Horizontal through Cable to Horizontal Rebar	<b>E-96</b>
Type <b>BCR-1</b> Molds Horizontal Cable Terminal to Ground Rod	<b>E-81</b>	Type <b>BCS-3</b> Molds Angular Cable Drop to Vertical Steel Surface	<b>E-89</b>	Type <b>BCRE-6</b> Molds Horizontal Cable Tap to Vertical Rebar	<b>E-97</b>
		Type <b>BCS-23</b> Molds Vertical Cable Drop to Vertical Steel Surface	<b>E-90</b>		

E-3

Blue highlighted items are industry standard and most frequently ordered.

**TABLE OF CONTENTS (continued)**  
**BURNDYWeld® Exothermic Grounding (continued)**

	<b>GROUNDMAX®</b>	<b>E-98, E-99</b>
	<b>GRIDMAX™</b>	<b>E-100</b>
<b>E-4</b>	<b>B-106 &amp; B-107 Handle Clamps</b>	<b>E-101</b>
	<b>B40-0106-75 Handle Attachment</b>	<b>E-101</b>
	<b>Mold Support Clamp</b>	<b>E-101</b>
	<b>Vertical Magnetic Clamps</b>	<b>E-102</b>
	<b>Horizontal &amp; Vertical Chain Clamps</b>	<b>E-102</b>
	<b>BURNDYWeld® Accessories</b>	
	<b>B38-0330-00 Cable Clamp</b>	<b>E-103</b>
	<b>Cable Cleaning Brush &amp; Card Cloth Brush</b>	<b>E-103</b>
	<b>Mold Cleaners</b>	<b>E-103</b>
	<b>Packing Material</b>	<b>E-103</b>
	<b>BURNDYWeld® Tool Kits</b>	<b>E-104</b>
	<b>BURNDYWeld® Tools</b>	<b>E-104</b>
	<b>B38-0101-00 Rasp</b>	<b>E-104</b>
	<b>B38-0309-00 Flint Ignitor</b>	<b>E-104</b>
	<b>Ground Rod Driving Sleeves</b>	<b>E-105</b>
	<b>Shim Stock, Adapter Sleeves</b>	<b>E-105</b>


Blue highlighted items are industry standard and most frequently ordered.

**THE HYGROUND®  
IRREVERSIBLE  
COMPRESSION  
SYSTEM**













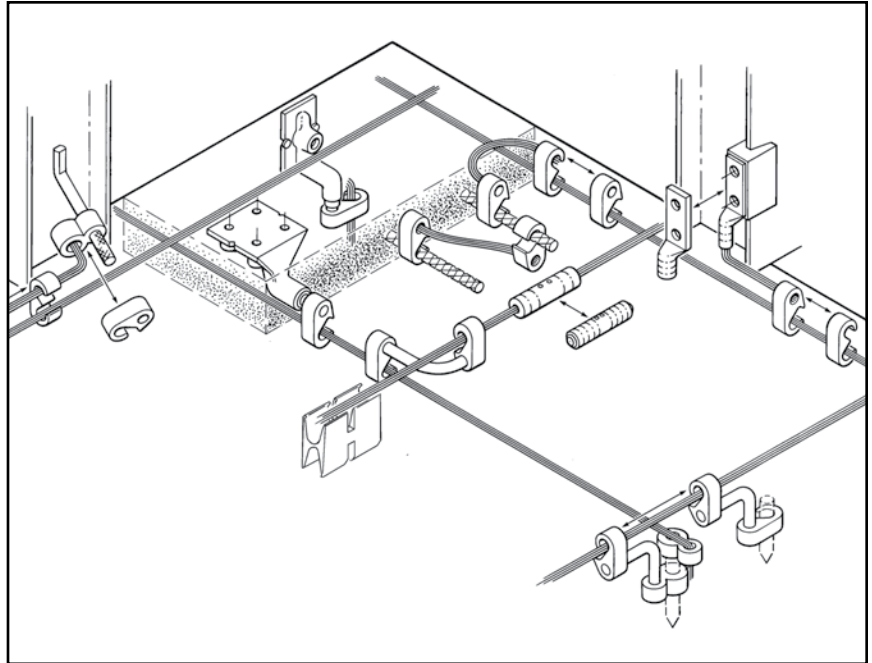

BURNDY® has developed an irreversible compression ground system which meets the most stringent safety and performance requirements, including those of OSHA and nuclear power plant design. Performance excellence and long life expectancy are the system's basic design guidelines. It is a complete system which consists of connectors for grid cross connections, taps, splices, cable to ground rod, ground plates and terminations.

Our irreversible compression ground connectors employ well-proven design principles and technology that have been in existence for over 60 years.

Connectors are just one component of our Irreversible Compression Ground System. Installation tooling is also an integral part of this system. BURNDY® pioneered the compression connector principle and continues today to be the leader in compression technology. Our tooling package is the most extensive in the industry and affords the user many options.



**( LEGEND )**

 <b>YGHPC</b>	 <b>YGL-C</b>	 <b>YGHA</b>	 <b>YGF-4N</b>	 <b>YSHG</b>
 <b>YGHR-C</b>	 <b>YGLR-C</b>	 <b>YGHS</b>	 <b>YGF-2N</b>	 <b>YGIB</b>
 <b>YGHC-C</b>	 <b>YGA</b>	 <b>YGS</b>	 <b>GSTUD-HY</b>	

Blue highlighted items are industry standard and most frequently ordered.

## THE HYGROUND® IRREVERSIBLE COMPRESSION SYSTEM

(Continued)

### Features and Benefits


- Irreversible compression.
  - ◇ Meets NEC code, section 250.
- Material-pure wrought copper extrusions, rod and seamless tubing—identical material to the conductor.
  - ◇ Completely eliminates the possibility of corrosion due to dissimilar metals.
- Heavy duty connector design.
  - ◇ All connectors will carry the equivalent or greater current carrying capacity of the conductor while maintaining high mechanical strength and electrical integrity.
- Range taking design—minimum number of connector combinations required to install a conductor range of #6 solid to 500 kcmil plus 1/2", 5/8", 3/4", and 1" ground rods and rebar.
  - ◇ Inventories are kept to a minimum and product selection is simplified.
- System engineered tooling.
  - ◇ Each tooling recommendation has been designed to ensure reliability of the connection.
- Irreversible compression connectors can be installed in all kinds of weather.
  - ◇ Eliminates costly construction delays and enables the installer to better schedule his job.
- May be installed without special training or special tools. Y750 crimps entire range.
  - ◇ Low installed cost.
  - ◇ Simplified installation.
- Each connection can be made in less than 3 minutes.
  - ◇ Low installed cost.
  - ◇ Simplified installation.
- Each connector is clearly marked with catalog number, conductor size and installation die information.
  - ◇ Easy and accurate identification.
- Inspection ports are provided to assure proper insertion of the conductor.
  - ◇ Built-in quality assurance.
- The die index number is embossed on the connector after completion of the crimp.
  - ◇ Facilitates speedy inspection of installed connectors to insure consistently reliable and sound connections.
- Most HYGROUND® irreversible compression elements are prefilled with PENETROX™ and individually sealed.
  - ◇ Ensures that all contact surfaces are in the proper condition for installation.
  - ◇ Ensures the electrical integrity of the finished connection by inhibiting moisture and contaminates from entering the contact area.
- All HYGROUND® irreversible compression connectors are Listed in conformance with Underwriters Laboratories Standard UL467 and conform to applicable sections of the National Electrical Code.
  - ◇ May be used in direct burial or concrete embedded grounding applications.
- All HYGROUND® irreversible connectors (with the exception of type YGA and YGS) have been tested successfully according to requirements of Standard IEEE 837.
  - ◇ Meets tough industry performance requirements.
  - ◇ UPRECRIMP dies give added mechanical strength. UPRECRIMP 34 for 3/4" rod, UPRECRIMP 12 for 1/2" rod, and UPRECRIMP 58 for 5/8" rod (now includes undersized U.S. marketplace rods).
- Allows connection to most sizes of structural steel with no drilling, tapping, or welding.
  - ◇ Safely installed at low cost. Hot work permits are not required to install in hazardous areas

Blue highlighted items are industry standard and most frequently ordered.



TYPE YGL-C

HYGRID™ CROSS CONNECTOR

An irreversible compression ground grid cross connector which allows adjustment of the compression elements prior to installation. Only six connectors and four dies are required to install all combinations from #6 solid through 500 kcmil. UL467 Listed. Acceptable for direct burial in earth and concrete. Prefilled with PENETROX™ compound and strip sealed.

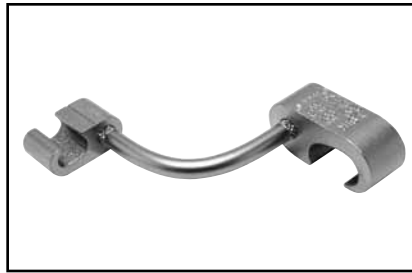

IEEE-837

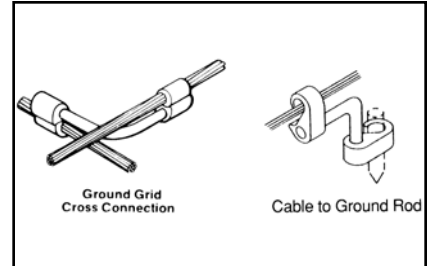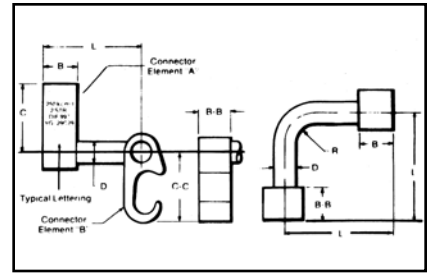

~ UL96 Listed for Lightning Protection.



Catalog Number	B	BB	C	C-C	D	L	R
YGL2C2	0.75	0.75	1.09	1.09	0.31	2.50	0.31
YGL29C2			1.66	1.09	0.31		0.31
YGL29C29			1.66	1.66	0.50		0.50
YGL34C2			2.09	1.09	0.31		0.31
YGL34C29			2.09	1.66	0.50		0.50
YGL34C34	1.10	1.10	2.28	2.28	0.75		0.75

ORDERING INFORMATION

Catalog Number	Cable to Cable		Cable to Ground Rod		To Rebar
	Element "A"	Element "B"	Element "A"	Element "B"	Element "A"
YGL2C2	#6 Sol. (0.162) - #2 Str. (0.292) {59500} - {59500}	#6 Sol. (0.162) - #2 Str. (0.292) {59500} - {59500}	—	—	—
YGL29C2	#1 Str. (0.332) - 250 kcmil (0.575) {98500} - {131500}	#6 Sol. (0.162) - #2 Str. (0.292) {59500} - {59500}	1/2" - 5/8" Rod	#6 Sol. (0.162) - #2 Str. (0.292)	3/8" - 1/2"
YGL29C29	#2 Str. (0.292) - 250 kcmil (0.575) {65500} - {131500}	#2 Str. (0.292) - 250 kcmil (0.575) {65500} - {131500}	1/2" - 5/8" Rod	#2 Str. (0.292) - 250 kcmil (0.575)	#3 - 4 Rebar
YGL34C2	250 kcmil (0.575) - 500 kcmil (0.813)	#6 Sol. (0.162) - #2 Str. (0.292)	5/8" - 3/4" Rod	#6 Sol. (0.162) - #2 Str. (0.292)	5/8" - 3/4" #5 - 6 Rebar
YGL34C29		#2 Str. (0.292) - 250 kcmil (0.575)		#2 Str. (0.292) - 250 kcmil (0.575)	
YGL34C34		250 kcmil (0.575) - 500 kcmil (0.813)		250 kcmil (0.575) - 500 kcmil (0.813)	

Dimensions in brackets { } represent lightning protection conductors.

Catalog Number	Installation Tools, Die Set Catalog Number (Number of Crimps)							
	Y750/Y35/Y39 HYPRESS™		PAT750-18V		Y45 HYPRESS™		Y46 HYPRESS™	
	Element "A"	Element "B"	Element "A"	Element "B"	Element "A"	Element "B"	Element "A"	Element "B"
YGL2C2	U-O (1)	U-O (1)	U-O (1)	U-O (1)	U-O (1)	U-O (1)	U-O (1)	U-O (1)
YGL29C2	U997 (1)	U-O (1)	③ U997P (1)	U-O (1)	U997 (1)	U-O (1)	U997 (1)	U-O (1)
YGL29C29	U997 (1)	U997 (1)	③ U997P (1)	③ U997P (1)	U997 (1)	U997 (1)	U997 (1)	U997 (1)
YGL34C2*	-	-	PU998 (1)	U-O (1)	S998 or PU998 (1)	U-O (1)	P998 or PU998 (1)	U-O (1)
YGL34C29*	-	-	PU998 (1)	③ U997P (1)	S998 or PU998 (1)	U997 (1)	P998 or PU998 (1)	U997 (1)
YGL34C34*	-	-	U1011 (3)	U1011 (3)	S1011 (3)	S1011 (3)	P1011 (3)	P1011 (3)

- Where a "U" or "PU" die is recommended with Y45 HYPRESS™, a PT6515 adapter must be used.
- Where a "U" or "PU" die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used.
- ③ Polarized die for the PAT750-18V.

\* These connectors can only be installed using the Y750, Y45, or Y46 HYPRESS™ with the recommended dies.

NOTES:

- Before crimping, both connector elements can be turned on rod diameter "D" to any desired position.
- Clean rust and/or protective coatings from rebar prior to installation.
- When attaching connector to ground rod, ground rod must be embossed with appropriate PRECRIMP™ die. For connections that must meet IEEE 837 requirements UPRECRIMP-type PRE crimp dies must be used for maximum clamping retention.

Ground Rod Dia.	PRECRIMP Dies	
1/2"	UPRECRIMP 12	U2CABT
5/8"	UPRECRIMP 58	
3/4"	UPRECRIMP 34	

Blue highlighted items are industry standard and most frequently ordered.



# Grounding HYGROUND® Compression

BURNDY®

## TYPE YGLR-C

### GRIDLOK™

High Strength Irreversible  
Compression Ground Rod to Grid  
Connector

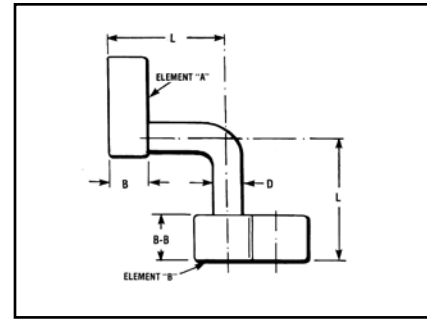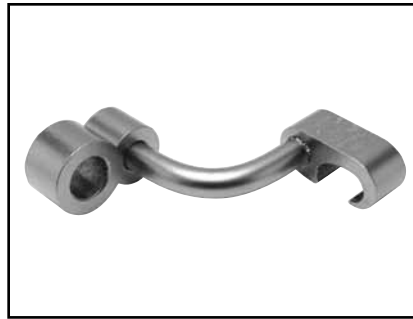

Ground grid connector for a wide range of copper cable to ground rod. Provides high torque strength on ground rod. UL467 Listed. Acceptable for direct burial in earth and concrete. Prefilled with PENETROX™ compound and strip sealed.

E-8



IEEE-837



Catalog Number	B	B-B	D	L	Commercial Copper Cable Range Element "A"	Metric Copper Cable Range Element "A"	CopperWeld Cable Range Element "A"	Ground Rod Dia Element "B"
YGLR29C12	0.75	0.88 [22.4]	0.31	2.53	#2 Str. (0.292 Dia.) - 250 kcmil (0.575 Dia.)	35mm <sup>2</sup> (7.62mm Dia.) - 120 mm <sup>2</sup> (14.40mm Dia.)	91.65 kcmil (0.343 Dia.) - 248.8 kcmil (0.572 Dia.)	1/2" [12.7]
YGLR34C12	0.75	0.88 [22.4]	0.31	2.53	250 kcmil (0.575 Dia.) - 500 kcmil (0.813 Dia.)	120 mm <sup>2</sup> (14.40mm Dia.) - 240 mm <sup>2</sup> (20.35mm Dia.)	248.8 kcmil (0.572 Dia.) - 498.8 kcmil (0.810 Dia.)	
YGLR29C58	0.75	0.88 [22.4]	0.31	2.53	#2 Str. (0.292 Dia.) - 250 kcmil (0.575 Dia.)	35mm <sup>2</sup> (7.62mm Dia.) - 120 mm <sup>2</sup> (14.40mm Dia.)	91.65 kcmil (0.343 Dia.) - 248.8 kcmil (0.572 Dia.)	5/8" [15.9]
YGLR34C58	0.75	0.88 [22.4]	0.31	2.53	250 kcmil (0.575 Dia.) - 500 kcmil (0.813 Dia.)	120 mm <sup>2</sup> (14.40mm Dia.) - 240 mm <sup>2</sup> (20.35mm Dia.)	248.8 kcmil (0.572 Dia.) - 498.8 kcmil (0.810 Dia.)	
YGLR29C34	0.75	0.88 [22.4]	0.50	2.63	#2 Str. (0.292 Dia.) - 250 kcmil (0.575 Dia.)	35mm <sup>2</sup> (7.62mm Dia.) - 120 mm <sup>2</sup> (14.40mm Dia.)	91.65 kcmil (0.343 Dia.) - 248.8 kcmil (0.572 Dia.)	3/4" [19.1]
YGLR34C34	0.75	0.88 [22.4]	0.50	2.63	250 kcmil (0.575 Dia.) - 500 kcmil (0.813 Dia.)	120 mm <sup>2</sup> (14.40mm Dia.) - 240 mm <sup>2</sup> (20.35mm Dia.)	248.8 kcmil (0.572 Dia.) - 498.8 kcmil (0.810 Dia.)	
YGLR29C100	0.75	0.88 [22.4]	0.50	2.63	#2 Str. (0.292 Dia.) - 250 kcmil (0.575 Dia.)	35mm <sup>2</sup> (7.62mm Dia.) - 120 mm <sup>2</sup> (14.40mm Dia.)	91.65 kcmil (0.343 Dia.) - 248.8 kcmil (0.572 Dia.)	1" [25.4]
YGLR34C100	0.75	0.88 [22.4]	0.50	2.63	250 kcmil (0.575 Dia.) - 500 kcmil (0.813 Dia.)	120 mm <sup>2</sup> (14.40mm Dia.) - 240 mm <sup>2</sup> (20.35mm Dia.)	248.8 kcmil (0.572 Dia.) - 498.8 kcmil (0.810 Dia.)	

Catalog Number	Installation Tools, Die Set Cat. No. (Number of Crimps)							
	Y35/Y39 HYPRESS™		Y750/PAT750		② Y45 HYPRESS™		③ Y46 HYPRESS™	
	Element "A"	Element "B"	Element "A"	Element "B"	Element "A"	Element "B"	Element "A"	Element "B"
YGLR29C12	U997 (1)	PU998 (1)	U997 (1)	U1011 (2) or PU998 (1)	U997 (1)	S1012 (2) or PU998 (1)	U997 (1)	P1011 (2) or PU998 (1)
YGLR34C12	—	—	U1011 or PU998 (1)	U1011 (2) or PU998 (1)	S998 or PU998 (1)	S1012 (2) or PU998 (1)	P998 or PU998 (1)	P1011 (2) or PU998 (1)
YGLR29C58	U997 (1)	PU998 (1)	U997 (1)	U1011 (2) or PU998 (1)	U997 (1)	S1012 (2) or PU998 (1)	U997 (1)	P1011 (2) or PU998 (1)
YGLR34C58	—	—	U1011 or PU998 (1)	U1011 (2) or PU998 (1)	S998 or PU998 (1)	S1012 (2) or PU998 (1)	P998 or PU998 (1)	P1011 (2) or PU998 (1)
YGLR29C34	U997 (1)	PU998 (1)	U997 (1)	U1011 (2) or PU998 (1)	U997 (1)	S1012 (2) or PU998 (1)	U997 (1)	P1011 (2) or PU998 (1)
YGLR34C34	—	—	U1011 (2) or PU998 (1)	U1011 (2) or PU998 (1)	U1011 (2) or PU998 (1)	S1012 (2) or PU998 (1)	U1011 (2) or PU998 (1)	P1011 (2) or PU998 (1)
YGLR29C100	—	—	U997 (1)	U1011 (2) or PU998 (1)	U997 (1)	S1012 (2) or PU998 (1)	U997 (1)	P1011 (2) or PU998 (1)
YGLR34C100	—	—	U1011 (2) or PU998 (1)	U1011 (2) or PU998 (1)	U1011 (2) or PU998 (1)	S1012 (2) or PU998 (1)	U1011 (2) or PU998 (1)	P1011 (2) or PU998 (1)

**NOTES:**

- ② Where a "U" or "PU" die is recommended with Y45 HYPRESS™, a PT6515 adapter is required
- ③ Where a "U" or "PU" die is recommended with Y46 HYPRESS™, a PUADP-1 adapter is required
- ④ Polarized die for the PAT750 series tool

- Before crimping, both connector elements can be turned on rod diameter "D" to any desired position.
- When attaching connector to ground rod, ground rod must be embossed with appropriate PRECRIMP die. For connectors that must meet IEEE 837 requirements, UPRECRIMP-type precrimp dies must be used for maximum clamping retention. No precrimp needed if using S1012, P1011 or U1011 die sets.

Ground Rod Dia.	PRECRIMP Dies	
1/2"	UPRECRIMP 12	U2CABT
5/8"	UPRECRIMP 58	
3/4"	UPRECRIMP 34	

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175

www.burndy.com


Canada: 1-800-387-6487





**TYPE YGHP-C**

**HYTAP™**

Irreversible compression ground tap figure 6 can be used as a tap connector or as a tap splice connector. Four die sets and eight connectors can accommodate a conductor range from #8 solid through 500 kcmil plus 1/2", 5/8" and 3/4" copper bonded ground rods. UL467 Listed. Acceptable for direct burial in earth and concrete. Prefilled with PENETROX™ compound and strip sealed.

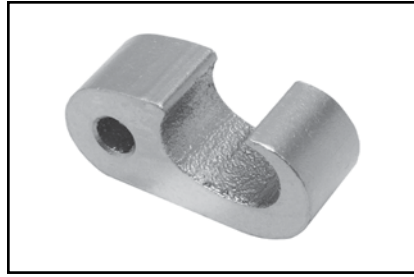

✓ UL96 Listed for Lightning Protection.

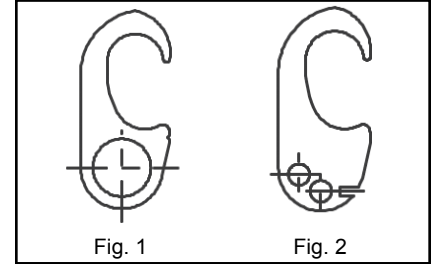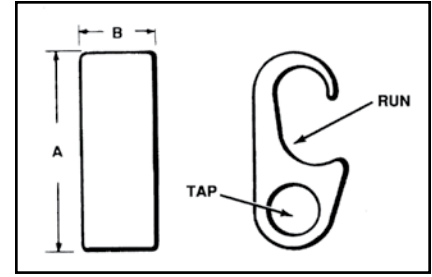

E-9

Catalog Number	Fig. #	Accommodates		⑨ Cable to Rebar		B	Die Index	Installation Data				
		① Run	① Tap	Run	Tap			Y750/Y35/Y39	PAT750-18V	Y45 ②	Y46 ③	# of Crimps
YGHP2C2	1	#6 Sol. (0.162) {59500} - #2 Str. (0.292) {59500}	⑥ #6 Sol. (0.162) {59500} - #2 Str. (0.292) {59500}	—	—	0.75	O	UO	UO	UO	UO	1
YGHP2C6W6W ⑦	2	#6 Sol. (0.162) - #2 Str. (0.292)	#8 Sol. (0.128) - #6 Str. (0.184) Qty. 2	—	—							1
YGHP29C6W6W ⑦	2		#8 Sol. (0.128) - #6 Str. (0.184) Qty. 2	#3 Rebar 3/8 - 1/2 #4 Rebar	#8 Sol. - 6 Str.	2.31	997	U997	U997P ④	U997	U997	1
YGHP29C2	1	1/0 Str. (0.372) {98500} - 250 kcmil (0.575) {131500}	#4 Sol. (0.204) {#4 Sol.} - #2 Str. (0.292) {#2 Str.}	#3 Rebar 3/8 - 1/2 #4 Rebar	#2 Str.							1
YGHP29C26	1	1/2" - 5/8" Rod	1/0 Str. (0.372) {98500} - 2/0 Str. (0.419) {98500}	#3 Rebar 3/8 - 1/2 #4 Rebar	1/0 Str. - 2/0 Str.							1
YGHP29C29 ⑧	1		3/0 Str. (0.470) {131500} - 250 kcmil (0.575) {211500}	#3 Rebar 3/8 - 1/2 #4 Rebar	3/0 Str. - 250 kcmil							1
YGHP34C2 ⑤	1	250 kcmil (0.575) {250 kcmil} - 500 kcmil (0.813) {500 kcmil} 5/8" - 3/4" Rod	#4 Sol. (0.204) - #2 Str. (0.292)	#5 Rebar 5/8 - 3/4 #6 Rebar	—	2.75	1011	U1011	U1011	S1011	P1011	1
YGHP34C26 ⑤	1		1/0 Str. (0.372) {98500} - 2/0 Str. (0.419) {98500}	#5 Rebar 5/8 - 3/4 #6 Rebar	1/0 Str. - 2/0 Str.							1
YGHP34C29 ⑤	1		3/0 Str. (0.470) {131500} - 250 kcmil (0.575) {211500}	#5 Rebar 5/8 - 3/4 #6 Rebar	3/0 Str. - 250 kcmil							1
YGHP34C34 ⑤	1	250 kcmil (0.575) - 500 kcmil (0.813) 5/8" - 3/4" Rod	350 kcmil (0.681) - 500 kcmil (0.843)	#5 Rebar 5/8 - 3/4 #6 Rebar	350 kcmil - 500 kcmil	2.75	1011	U1011	U1011	S1011	P1011	3

**NOTES:**

- ① Dimensions in brackets { } represent lightning protection conductors.
- ② Where a "U" or "PU" die is recommended with Y45 HYPRESS™, a PT6515 adapter is required.
- ③ Where a "U" or "PU" die is recommended with Y46 HYPRESS™, a PUADP-1 adapter is required.
- ④ Polarized die for the PAT750 series tool.
- ⑤ These connectors can only be installed using the Y750, Y45 or Y46 series of HYPRESS™ tools; cannot be installed with the Y35 or Y39 series.
- ⑥ When using #6 Sol in tap, fold conductor double for improved fill.
- ⑦ Not UL96/CSA
- ⑧ When using 3/0 in tap, minimum run conductor must be 2/0 Str.
- ⑨ Clean rust and protective coatings from rebar prior to installation to provide proper ground connection. Precrimping is not required.

Ground Rod Dia.	PRECRIMP Dies	
1/2"	UPRECRIMP 12	U2CABT
5/8"	UPRECRIMP 58	
3/4"	UPRECRIMP 34	

For increased rotational resistance on ground rods, pre-crimp ground rod with U2CABT, UPRECRIMP dies may be used for even greater rotation and vibration resistance on ground rods.




**Blue highlighted items are industry standard and most frequently ordered.**

## TYPE YGHP-C

### HYTAP™ CONNECTOR

High Strength Copper Irreversible Compression

Ground Rod Tap Connector

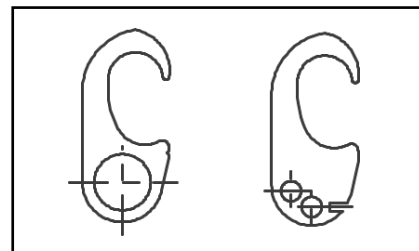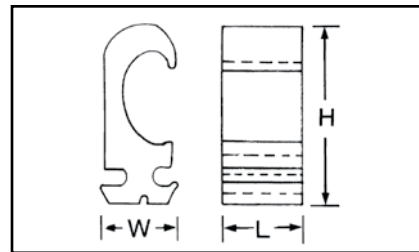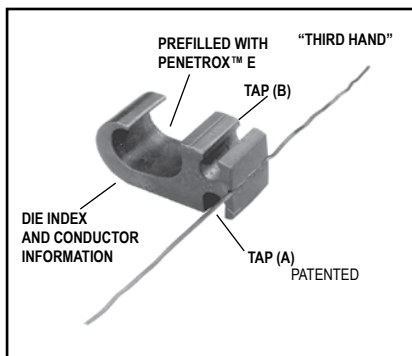

### Features & Benefits

- Tap (A) accepts a continuous run on tap conductor. Tap (B) accepts a tap conductor only
  - ◊ One connector style can be used for many applications, reducing number of connectors in inventory
- Material is high conductivity wrought copper extrusion, identical material to the conductor
  - ◊ High-conductivity copper minimizes resistance and voltage drop. Eliminates the possibility of corrosion due to dissimilar metals
- System engineered tooling
  - ◊ The tooling recommendation has been designed to ensure a reliable, dependable connection every time
- The die index number is embossed on conductor after completion of crimp
  - ◊ Facilitates speedy inspection of installed connectors to insure consistently reliable and dependable connections

- Prefilled with PENETROX™ E and individually sealed in clear polyethylene sheet
  - ◊ Ensures the electrical integrity of the finished connection by inhibiting moisture and contaminants from entering the contact area. Maintains long-term high-conductivity
- UL467 Listed
  - ◊ May be used in direct burial or concrete embedded grounding applications. Provides quality assurance to recognized industry NEC standards from an independent party
- "Third Hand" constrains conductors while installer completes crimp, included with each connector
  - ◊ Simplifies installation, reducing installed cost

E-10

Type YGHP-C irreversible compression ground tap figure 6 can be used as a ground rod tap connector for both continuous run and tapping applications. An open groove allows ground rod to be connected to a continuous run or tap. The second groove is for a tap only. Prefilled with PENETROX™ E and strip sealed. UL467 Listed for direct burial in earth or concrete.

IEEE-837



SINGLE TAP



CONTINUOUS RUN



CONTINUOUS RUN AND TAP

Catalog Number	Ground Rod Dia. ①	Tap Conductor ②	Dimensions			Installation Tooling Die Number ③ (# of Crimps)		Die Index
			H	L	W	Y35/Y750/PAT750 HYPRESS™	④ Y46 HYPRESS™	
YGHP58C2W-2	1/2" - 5/8"	#2 Sol. - #6 Sol. Copper (1) Continuous Run and (1) Tap or up to (2) Taps may be connected	1.90"	0.75"	0.94"	U997 (1)	U997 (1)	997
YGHP58C2W-2TN								

① Ground rod must be precrimped with die U2CABT (Index 348); for greater rotational resistance use UPRECRIMP die; Galvanized Steel Rods require YGHP58C2W-2TN

② Either tap position may be left void when fewer than (2) conductors are used

③ See Tooling Section in Master Catalog for complete tool and die listing

④ Use PUADP-1 with "U"-dies in Y46

**NOTE:**



A 12" bend radius is recommended for the conductor

**Blue highlighted items are industry standard and most frequently ordered.**

**TYPE YGHC-C**

**HYTAP™ CONNECTOR**

Irreversible compression ground tap figure “C” connectors. Accommodates all cable combinations from #6 solid through 500 kcmil. “C”- shaped opening permits placing two continuous parallel cables into conductor groove. UL 467 Listed. Acceptable for direct burial in earth or concrete. Prefilled with PENETROX™ compound and strip sealed. Certain sizes are also UL467 Listed and CSA Certified for wire to ground rod.

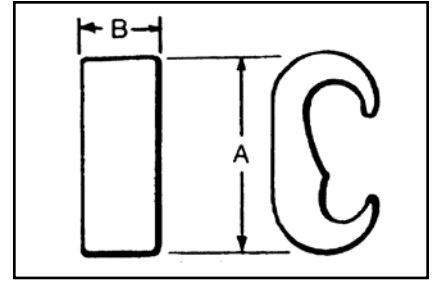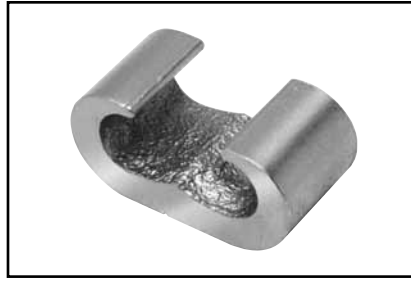

**IEEE-837**



E-11

✓ UL96 Listed for Lightning Protection.

Catalog Number	① Commercial Copper Cable to Cable or ② Cable to Ground Rod		Stranded Copper Cable Range Metric		A	B	Die Index No.	Installation Data			No. of Crimps
	Run	Tap	Run	Tap				Y750/Y35/ PAT750/Y39	Y45 ③	Y46 ④	
<b>YGHC2C2</b>	#6 Sol. (0.162) #2 Str. (0.292) 1/4" Rod⑤	#6 Sol. (0.162) #2 Str. (0.292)	10 mm² (4.12 mm) 35 mm² (7.62 mm)	10 mm² (4.12 mm) 35 mm² (7.62 mm)	1.16	0.75	C	U-C	U-C	U-C	1
<b>YGHC26C2</b>	1 Str. (0.328) {98500} 2/0 Str. (0.419) {98500} 3/8" Rod ⑤	#6 Sol. (0.162) {#6 Sol.} #2 Str. (0.292) {#2 Str.}	35 mm² (7.62 mm) 70 mm² (10.9 mm)	10 mm² (4.12 mm) 35 mm² (7.62 mm)	1.41	0.75	O	U-O	U-O	U-O	1
<b>YGHC26C26</b>	1 Str. (0.328) {98500} 2/0 Str. (0.419) {98500} 3/8" Rod ⑤	1 Str. (0.328) {98500} 2/0 Str. (0.419) {98500}	35 mm² (7.62 mm) 70 mm² (10.9 mm)	35 mm² (7.62 mm) 70 mm² (10.9 mm)	1.54	0.75	O	U-O	U-O	U-O	1
<b>YGHC29C26</b>	3/0 Str. (0.470) {3/0 Str.} 250 kcmil (0.575) {250 kcmil} 1/2" or 5/8" Rod ⑤	6 Sol. (0.162) {59500} 2/0 Str. (0.419) {98500}	95 mm² (12.5 mm) 120 mm² (14.4 mm)	10 mm² (4.10 mm) 70 mm² (10.90 mm)	1.97	0.75	997	U997	U997	U997	1
<b>YGHC29C29</b>	3/0 Str. (0.470) 250 kcmil (0.575) 1/2" or 5/8" Rod ⑤	3/0 Str. (0.470) 250 kcmil (0.575)	95 mm² (12.5 mm) 120 mm² (14.4 mm)	95 mm² (12.5 mm) 120 mm² (14.4 mm)	2.06	0.88	997	U997	U997	U997	1
<b>YGHC34C26</b> ⑥	300 kcmil (0.630) {300 kcmil} 500 kcmil (0.813) {500 kcmil} 3/4" Rod ⑤	6 Sol. (0.162) {59500} 2/0 Str. (0.419) {98500}	150 mm² (16 mm) 240 mm² (20.35 mm)	10 mm² (4.10 mm) 70 mm² (10.90 mm)	2.42	0.88	1011	U1011	S1011	P1011	2
<b>YGHC34C29</b> ⑥	300 kcmil (0.630) 500 kcmil (0.813)	3/0 Str. (0.470) 250 kcmil (0.575)	150 mm² (16 mm) 240 mm² (20.35 mm)	95 mm² (12.5 mm) 120 mm² (14.4 mm)	2.67	0.88	1011	U1011	S1011	P1011	2
<b>YGHC34C34</b> ⑥	300 kcmil (0.630) 500 kcmil (0.813)	300 kcmil (0.630) 500 kcmil (0.813)	150 mm² (16 mm) 240 mm² (20.35 mm)	150 mm² (16 mm) 240 mm² (20.35 mm)	2.91	1.10	1011	U1011	S1011	P1011	3

① Dimensions in brackets { } represent lightning protection conductors  
 ② For ground rod to wire applications, ground rod must be precrimped; see table for appropriate precrimp dies  
 ③ Where a “U” or “PU” die is recommended with the Y45 HYPRESS™, a PT6515 adapter must be used  
 ④ Where a “U” or “PU” die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used

⑤ Ground rod to copper cable is UL467 Listed for direct burial in earth and concrete  
 ⑥ These connectors cannot be installed with the Y35 or Y39 HYPRESS™  
**NOTES:**  
 Listed under UL486A for copper wire connectors  
 For connectors without PENETROX™ oxide inhibitor, add suffix “NP” to the end of the catalog number (example: YGHC2C2-NP)

Ground Rod Dia.	PRECRIMP Dies	
	1/2"	UPRECRIMP 12
5/8"	UPRECRIMP 58	
3/4"	UPRECRIMP 34	

**Blue highlighted items are industry standard and most frequently ordered.**


# Grounding HYGROUND® Compression

BURNDY®

## TYPE YGC

### COPPER CRIMPIT™

UL 467 Listed for direct burial in earth or concrete.  
Prefilled with PENETROX™ E2 oxide inhibitor.

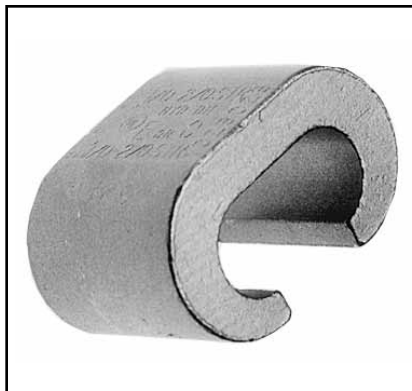

E-12

Catalog Number	Copper Conductor (Sol. & Str.)		H	L	Die Index	OUR840	MD6/MD7	Number of Crimps
	Run	Tap						
YGC8C8	8 AWG	8 AWG	0.46	0.52	162	W162	W162	2
YGC6C8	6 AWG	8 AWG	0.73	0.62	BG	XBG	WBG	2
YGC6C6	6 AWG	6 AWG	0.76	0.62	BG	XBG	WBG	2

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175

www.burndy.com


Canada: 1-800-387-6487

TYPE YSHG

HIGH STRENGTH COPPER  
IRREVERSIBLE COMPRESSION

Double H-Tap Connector

Type YSHG Double H-Tap grounding series is comprised of five connectors designed to accommodate wire range sizes #14 through 500 kcmil, including ground rod sizes: 3/4", 1", and rebar sizes: #6, #7, #8 and #9. Prefilled with PENETROX™ E2 and strip sealed.

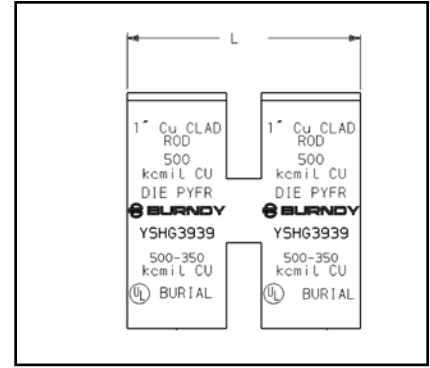

Features & Benefits

- UL467 Listed
  - ◇ Suitable for direct burial in earth or concrete.
- Material is high conductivity copper extrusion
  - ◇ Minimizes resistance, eliminates corrosion due to dissimilar metals.
- Grooves are prefilled with PENETROX™ E2 oxide inhibitor and individually sealed
  - ◇ Inhibits moisture and contaminants ensuring electrical integrity.

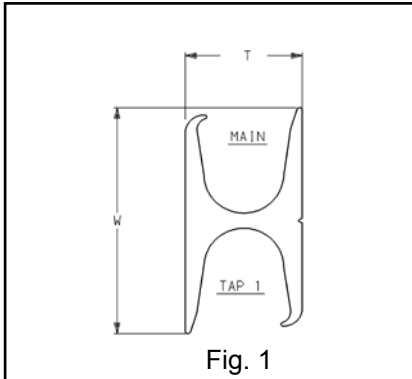


Fig. 1

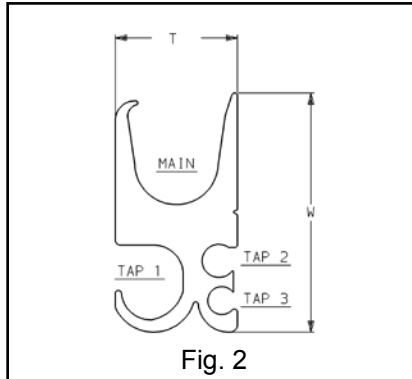


Fig. 2

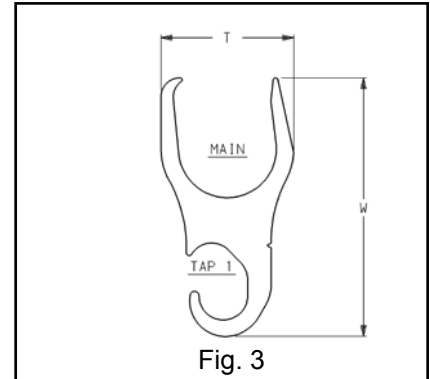


Fig. 3

Catalog Number	Fig. #	Conductor Sizes				Tooling (# of crimps)		Index Embossment	W ±.06	T ±.04	L ±.06
		Main	Tap 1	Tap 2	Tap 3	PAT750/Y750	Y46				
YSHG4429	3	#9 & #8 Rebar, 1" [25] Ground Rod	250 - 2	—	—	—	PYFR (2)	KR	3.22	1.70	2.44
YSHG3931 ①	2	#6 & #7 Rebar, 1" [25] Cu Clad Ground Rod, 3/4" Ground Rod 500 - 350 kcmil Copper	4/0 - 1/0	1 - 6	2 - 14	—	PYFR (2)	KR	2.97	1.50	2.34
YSHG3434	1	#6 Rebar, 3/4" [19] Ground Rod 400 - 250 kcmil Copper	400 - 4/0	—	—	U1104 (4)	P1104 (2) ② U1104 (4)	1104	2.43	1.15	2.44
YSHG3429	2	#6 Rebar, 3/4" [19] Ground Rod 400 - 4/0 kcmil Copper	3/0 - 1/0	1 - 4	8 - 14	U1104 (4)	P1104 (2) ② U1104 (4)	1104	2.23	1.31	2.44

① Not for use on 1" steel ground rod

② Use PUADP-1 adapter

Blue highlighted items are industry standard and most frequently ordered.

# Grounding HYGROUND® Compression


BURNDY®

## TYPE YGHR-C

### HYTAIL™

High Strength Irreversible  
Compression Ground Rod Tap  
Connectors

High torque strength ground rod connectors. Accommodates a wide range of copper conductors to ground rod. UL467 Listed. Acceptable for direct burial in earth or concrete. Prefilled with PENETROX™ compound and strip sealed.

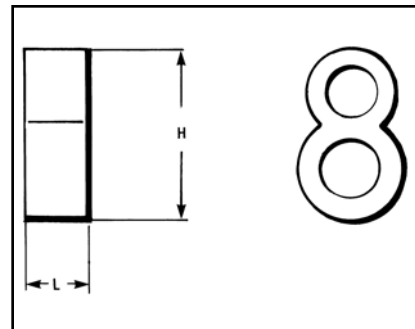

E-14



IEEE-837



Catalog Number	H	L	Commercial Copper Cable Range	Nominal Ground Rod Dia.	Installation Tools, Die Set Catalog Number (# of Crimps)			
					PAT750/Y750/ ① Y35/Y39	Y45 ① HYPRESS™	Y46 ① HYPRESS™	
YGHR26C12	1.94	0.88	#2 Str. (0.29 Dia.) - 2/0 Str. (0.42 Dia.)	1/2" [12.70]	—	S1012 (2) ② PU998 (1)	P1011 (2) ③ PU998 (1)	
YGHR26C58	1.97			5/8" [15.90]				
YGHR26C34	2.19			3/4" [19.00]				
YGHR26C100 ④	2.55			1" [25.40]				
YGHR29C12	1.94		#4/0 Str. (0.53 Dia.) - 250 kcmil (0.58 Dia.)	1/2" [12.70]		U1011 (2) PU998 (1)		S1012 (2) ② PU998 (1)
YGHR29C58	2.14			5/8" [15.90]				
YGHR29C34	2.19			3/4" [19.00]				
YGHR29C100 ④	2.45			1" [25.40]				
YGHR34C58	2.14		300 kcmil (0.63 Dia.) - 500 kcmil (0.81 Dia.)	5/8" [15.90]		S1012 (2) ② PU998 (1)		S1011 (2)
YGHR34C34 ④	2.44			3/4" [19.00]				
YGHR34C100 ④	2.45	1" [25.40]						

- ① Ground rod must be pre-crimped with die U2CABT (index 348) when the PU998 dies are used in the Y750, PAT750, Y35, Y39, Y45, Y46 and PAT46 tools; pre-crimping is not required when the P1011, S1011, S1012 or U1011 dies are used; UPRECRIMP dies may be used for additional mechanical resistance on ground rods.
- ② Where a PU998 die is recommended with the Y45 HYPRESS™, a PT6515 adapter must be used.
- ③ Where a PU998 die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used.
- ④ These connectors cannot be installed with the Y35 or Y39 HYPRESS™.

**NOTES:**

The catalog numbers shown are for unplated copper connectors for use on copper clad or stainless steel ground rod. To order electro-tin plated connectors for use on galvanized steel ground rod add suffix "-TN" to the catalog number. The ground rod hole diameter is larger for galvanized steel ground rod in the tin plated connector.

Complete die catalog numbers do not always appear on the connector, sometimes it is the die index.

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175

www.burndy.com


Canada: 1-800-387-6487

**TYPE YGHR-C**

**HYTAIL™**

**High Strength Irreversible  
Compression Ground Rod Tap  
Connectors**

Type YGHR-C irreversible compression grounding connector is engineered specifically for the Telecommunications Industry for (1, 2 or 3) #2 solid, tinned or bare conductor taps. UL467 Listed. Acceptable for direct burial in earth or concrete. BURNDY® has designed this connector to meet the stringent requirements of OSHA, the National Electric Code (NEC), UL, and the Telecommunications Industry. Performance and long life are this connector's basic design guidelines.

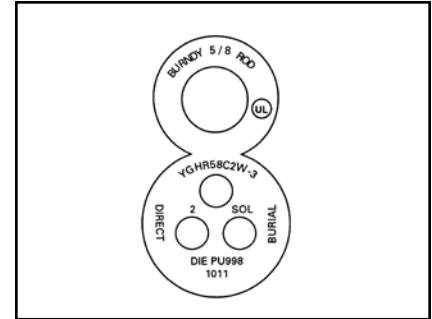


**Features & Benefits**

- Tap side 1, 2 or 3 conductors
  - ◇ One connector style can be used for many applications.
- Material is high conductivity wrought copper extrusion, identical material to the conductor
  - ◇ High-conductivity copper minimizes resistance and voltage drop. Eliminates the possibility of corrosion due to dissimilar metals.
- System engineered tooling
  - ◇ Each tooling recommendation has been designed to provide a reliable, dependable connection.
- The die index number is embossed on connector after completion of crimp

- ◇ Facilitates speedy inspection of installed connectors to ensure consistently reliable and dependable connections.
- Prefilled with PENETROX™ and individually sealed in clear polyethylene sheet
  - ◇ Ensures the electrical integrity of the finished connection by inhibiting moisture and contaminants from entering the contact area. Maintains long-term high-conductivity.
- UL 467 Listed. Acceptable for direct burial
  - ◇ May be used in direct burial or concrete embedded grounding applications. Provides quality assurance to recognized industry NEC standards from an independent party.

E-15

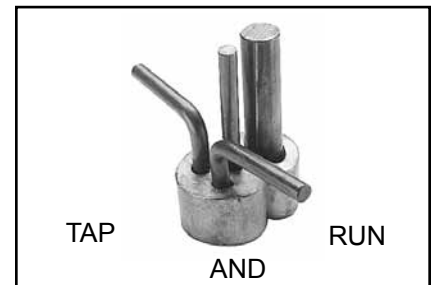

Catalog Number ⑤	Ground Rod Diameter ①	Tap Conductor ⑦	Installation Tools, Die Set Catalog Number (# of Crimps)		Die Index
			PAT750/Y750 ③ Y35④/Y39	Y46 ②	
YGHR58C2W-3	5/8"	#2 Sol Copper 1, 2, or 3 may be connected	PU998 (1) ⑥ U1011 (2)	PU998 (1) ⑥ U1011 (2) P998 (1) P1011 (2)	998/1011

① Contact BURNDY® for other ground rod diameters  
 ② PU998 and U1011 die sets require PUADP-1 adapter for use in the Y46 HYPRESS™  
 ③ The PAT750 and Y750 utilize PU dies and the U1011 die  
 ④ The Y35 only uses PU998 die  
 ⑤ To order electro-tin plated connector for use on galvanized steel ground rod add suffix "-TN" to the catalog number; The ground rod hole diameter is larger for galvanized steel ground rod in the tin plated connector  
 ⑥ Ground rod must be precrimped with die U2CABT (Index 348) when PU998 die set is used in the Y35, Y750 or Y46 HYPRESS™ tools; for even greater mechanical resistance use UPRECRIMP58 dies  
 ⑦ Tap positions may be left void when fewer than (3) conductors are used

**Blue highlighted items are industry standard and most frequently ordered.**

# Grounding HYGROUND® Compression


BURNDY®

## TYPE YGHA

### HYLUG™

#### Heavy Duty Irreversible Compression Terminals

Heavy duty HYLUG™ irreversible compression terminals designed not only to carry short circuit load, but to also withstand high mechanical stress. Each conductor element has an inspection probe hole to ensure proper cable insertion. UL467 Listed. Acceptable for direct burial in earth or concrete. UL486A Listed. Prefilled with PENETROX™ compound and strip sealed.

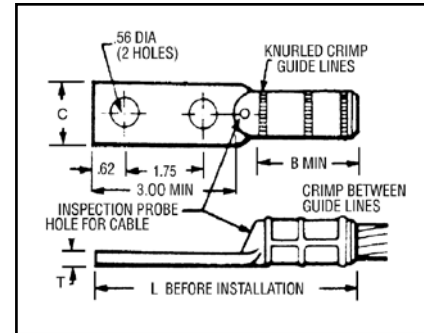

E-16



IEEE-837



Catalog Number	Copper Conductor Size	Installation Tools, Die Set Catalog Number and (# of Crimps) HYPRESS™ Y35/Y39/Y45 <sup>①</sup> /Y46 <sup>②</sup> /Y750/PAT750	B	C	L	T
YGHA2C-2N	2 AWG	U1CRT (1)	0.75	0.97	4.21	0.26
YGHA25-2N	1/0 AWG	U27RT (1)	0.83	0.91	4.60	0.19
YGHA26-2N	2/0 AWG	U28RT (1)	0.83	0.97	4.38	0.26
YGHA27-2N	3/0 AWG	U29RT (1)	1.18	1.08	4.94	0.29
YGHA28-2N	4/0 AWG	U30RT (2)	1.18	1.22	4.94	0.30
YGHA29-2N	250 kcmil	U31RT (2)	1.18	1.28	4.94	0.34
YGHA31-2N	350 kcmil	U34RT (2)	1.18	1.62	5.00	0.43
YGHA34-2N	500 kcmil	U36RT (3)	1.48	1.72	5.42	0.40

① Where a "U" or "PU" die is recommended with the Y45 HYPRESS™, a PT6515 adapter must be used

② Where a "U" or "PU" die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175

www.burndy.com

Canada: 1-800-387-6487




TYPE YGA

HYLUG™

Grounding Irreversible Compression  
Terminals

Irreversible compression HYLUG™ ground terminal specifically designed for grounding applications. Each connector has an inspection probe hole to ensure proper cable insertion. UL467 Listed. Acceptable for direct burial in earth or concrete. UL486A Listed. Prefilled with PENETROX™ compound and strip sealed.

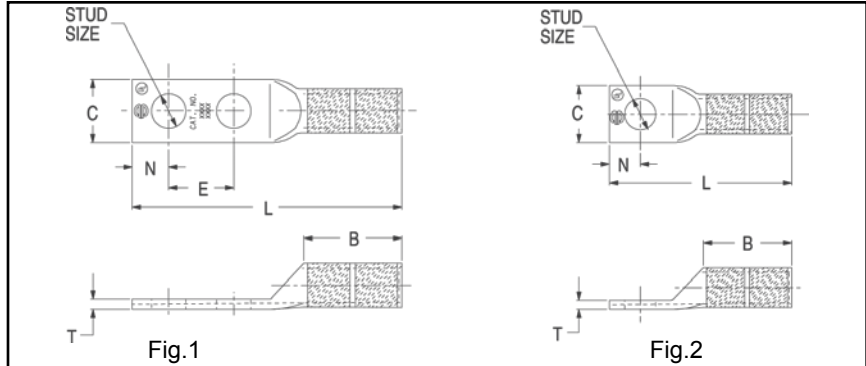

E-17

Catalog Number	Fig. #	Copper Conductor Size (Sol. & Str.)	Installation Tools, Die Set Cat. No. and (# of Crimps)			Stud Size	B	C	L	T	E
			Mechanical		Hydraulic						
			Y2MR	MD7-34R or OUR840	Y35/Y39/Y45 ① / Y46 ② / Y750/PAT750						
YGA8C-TC10	2	8 Sol./8 Str.	Red (4)	W8CVT (2) X8CRT (2)	U8CRT (2)	#10	0.81	0.41	1.57	0.08	—
YGA8C-TC14	2	8 Sol./8 Str.	Red (4)	W8CVT (2) X8CRT (2)	U8CRT (2)	1/4	0.81	0.44	1.69	0.08	—
YGA8C-TC516	2	8 Sol./8 Str.	Red (4)	W8CVT (2) X8CRT (2)	U8CRT (2)	5/16	0.81	0.51	1.75	0.06	—
YGA8C-2N	1	8 Sol./8 Str.	Red (4)	W8CVT (2) X8CRT (2)	U8CRT (2)	1/2	0.78	0.83	4.09	0.12	1.75
YGA6C-TC10	2	6 Sol./6 Str.	Blue (4)	W5CVT (2) X5CRT (2)	U5CRT (2)	#10	1.12	0.42	1.89	0.09	—
YGA6C-TC14	2	6 Sol./6 Str.	Blue (4)	W5CVT (2) X5CRT (2)	U5CRT (2)	1/4	1.12	0.45	2.02	0.08	—
YGA6C-TC516	2	6 Sol./6 Str.	Blue (4)	W5CVT (2) X5CRT (2)	U5CRT (2)	5/16	1.12	0.51	2.08	0.07	—
YGA6C-2TC38E2G1	1	6 Sol./6 Str.	Blue (4)	W5CVT (2) X5CRT (2)	U5CRT (2)	3/8	1.12	0.58	3.42	0.06	0.75
YGA6C-2N	1	6 Sol./6 Str.	Blue (4)	W5CVT (2) X5CRT (2)	U5CRT (2)	1/2	1.09	0.83	4.40	0.12	1.75
YGA2C-2TC38	1	2 Sol./2 Str.	Brown (4)	W2CRT (2) X2CRT (2)	U2CRT (2)	3/8	1.25	0.60	3.48	0.12	1.00
YGA2C-2N	1	2 Str.	Brown (4)	W2CRT (2) X2CRT (2)	U2CRT (2)	1/2	1.22	0.83	4.71	0.12	1.75
YGA25-2N	1	1/0 Str.	—	W25VT (4) X25RT (4)	U25RT (2)	1/2	1.35	0.83	4.81	0.12	1.75
YGA26-2N	1	2/0 Str.	—	W26VT (4) X26RT (4)	U26RT (2)	1/2	1.45	0.81	4.97	0.12	1.75
YGA28-2N	1	4/0 Str.	—	W28VT (4) X28RT (4)	U28RT (2)	1/2	1.57	1.00	5.17	0.14	1.75
YGA29-2N	1	250 kcmil	—	W29VT (4)	U29RT (2)	1/2	1.57	1.09	5.21	0.16	1.75
YGA34-2N	1	500 kcmil	—	W34VT (4)	U34RT (4)	1/2	2.20	1.52	6.08	0.23	1.75

① Where a "U" or "PU" die is recommended with the Y45 HYPRESS™, a PT6515 adapter must be used





② Where a "U" or "PU" die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used

Blue highlighted items are industry standard and most frequently ordered.

## TYPE GROUND TAB

### For any metal structure requiring grounding

The BURNDY® GROUND TAB offers a convenient attachment point for terminations of ground wires to steel structures or steel supports. The tabs are easily welded to steel, with two mounting pattern options available. The tabs are made of steel, 1/4" thick, and can be used to attach 1-hole or 2-hole terminals. Compression terminals, mechanical terminals, or SERVIT® Posts can be used to attach ground wires to steel tabs. All connection options and necessary hardware are sold separately. Often used when traditional connection methods are not practical, or when temporary grounds are required. Common applications include large generators, mobile construction site modules, housing structures built in permafrost areas, and in any metal structure requiring a permanent or temporary ground option.

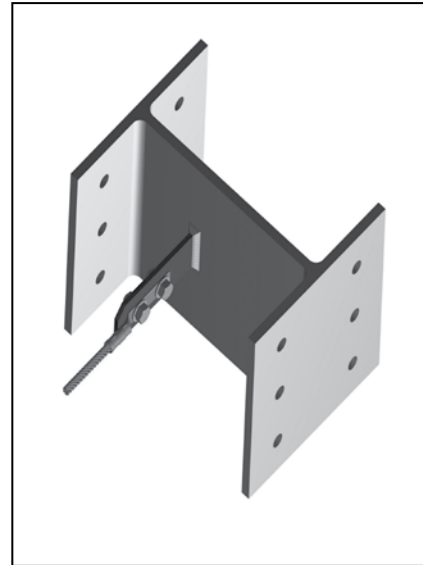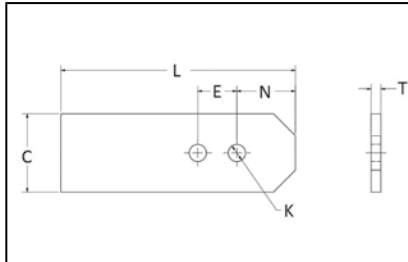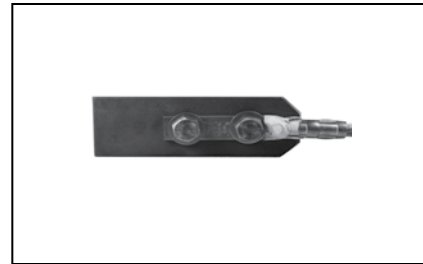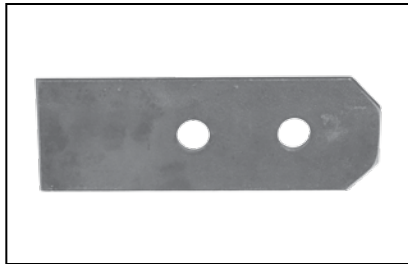

### Features & Benefits

- Convenient
- Can be used to attach 1-hole or 2-hole terminals
- 1/4" thick steel
- Easily welds to steel
- Many connection options
- Used when traditional options are not practical

Above: GROUND TAB with Type YGA HYGROUND® compression terminal and hardware.

E-18

Catalog Number	L Inches	C Inches	T Inches	N Inches	No. of Holes	Hole Size (K)	Hole Spacing (E) Inches
GROUND TAB1/2	6.00	2.00	1/4"	1.50	2	1/2"	1.75
GROUND TAB3/8	6.00	2.00	1/4"	1.50	2	3/8"	1.00



Right: Application image of GROUND TAB used with terminals


Blue highlighted items are industry standard and most frequently ordered.

TYPE YGHS

HYLINK™

Heavy Duty Irreversible Compression Splices

Heavy duty HYLINK™ ground splice designed not only to carry short circuit load, but to also withstand high mechanical stress. Each conductor element has an inspection probe hole and a center stop to ensure proper cable insertion. UL467 Listed. Acceptable for direct burial in earth or concrete. UL486A Listed. Prefilled with PENETROX™ compound and strip sealed.

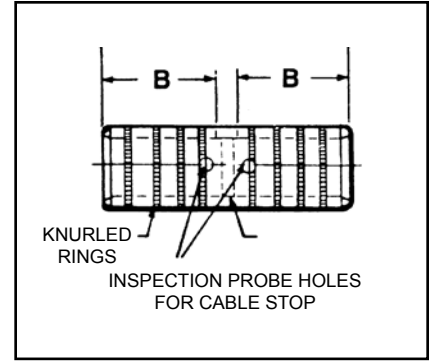

E-19



IEEE-837



Catalog Number	Copper Conductor Size	Installation Tools, Die Set Catalog Number and (# of Crimps) HYPRESS™ Y35/Y39/Y45 ①/Y46 ②/Y750/PAT750	B	L
YGHS2C	2 AWG	U1CRT (1)	0.75	1.73
YGHS25	1/0 AWG	U27RT (1)	0.83	1.89
YGHS26	2/0 AWG	U28RT (1)	0.83	1.89
YGHS27	3/0 AWG	U29RT (1)	1.18	2.59
YGHS28	4/0 AWG	U30RT (2)	1.18	2.59
YGHS29	250 kcmil	U31RT (2)	1.18	2.59
YGHS31	350 kcmil	U34RT (2)	1.18	2.59
YGHS34	500 kcmil	U36RT (3)	1.48	3.19

- ① Where a "U" or "PU" die is recommended with the Y45 HYPRESS™, a PT6515 adapter must be used
- ② Where a "U" or "PU" die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used

Blue highlighted items are industry standard and most frequently ordered.

# Grounding HYGROUND® Compression



BURNDY®

## TYPE YGS

### HYLINK™

#### Grounding Irreversible Compression Splices

Irreversible compression HYLINK™ ground splices specifically designed for grounding applications. Each conductor element has an inspection probe hole and a center stop to ensure proper cable insertion. UL467 Listed. Acceptable for direct burial in earth or concrete. UL486A Listed. Prefilled with PENETROX™ E compound and strip sealed.

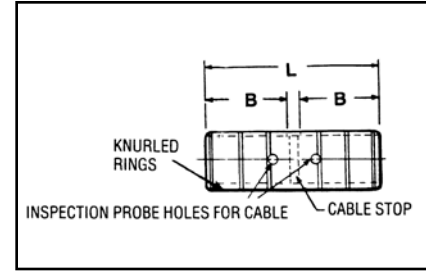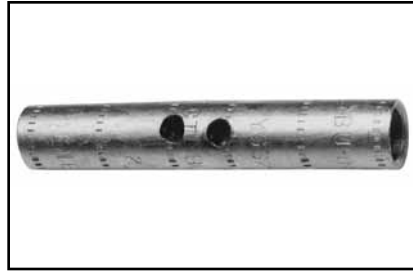

E-20



Catalog Number	Copper Conductor Size	Installation Tools, Die Set Catalog Number and (# of Crimps)				B	L
		Mechanical			Hydraulic		
		Y1MRTC	MD7-34R	OUR840	Y35/Y39/45①/Y46②/ Y750/PAT750		
YGS8C	8 Sol./Str.	Red (2)	W8CRT, W8CVT	X8CRT	U8CRT (2)	0.78	1.75
YGS6C	6 Sol./Str.	Blue (2)	W5CRT, W5CVT	X5CRT	U6CRT (2)	1.09	2.38
YGS2C	2 Sol./Str.	Brown (4)	W2CVT (2)	X2CVT (2)	U2CRT (2)	1.22	2.67
YGS25	1/0 Sol./Str.	—	W25VT (4)	X25RT (4)	U25RT (2)	1.35	2.97
YGS26	2/0 Str.	—	W26VT (4)	X26RT (4)	U26RT (2)	1.45	3.13
YGS28	4/0 Str.	—	W28VT (4)	X28RT (4)	U28RT (2)	1.57	3.37
YGS29	250 kcmil	—	W29VT (4)	—	U29RT (2)	1.57	3.37
YGS34	500 kcmil	—	W34VT (4)	—	U34RT (4)	2.20	4.63

① Where a "U" or "PU" die is recommended with the Y45 HYPRESS™, a PT6515 adapter must be used

② Where a "U" or "PU" die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175

www.burndy.com

Canada: 1-800-387-6487

TYPE YGF

GROUNDING PLATE

The irreversible compression ground plate is designed to withstand the rigors of concrete construction. The ground plates are made of high strength, high-conductivity cast copper alloy body with a pure wrought copper compression element. In addition to the tapped NEMA size holes and spacing on the face, the plate comes with a tapped hole on the underside for ease of positioning prior to pouring the concrete. UL467 Listed. Acceptable for direct burial in earth or concrete. Prefilled with PENETROX™ compound and strip sealed.



IEEE-837

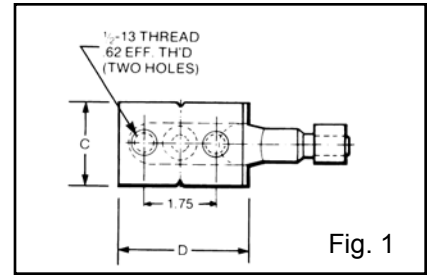
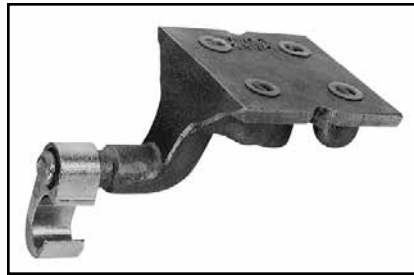


Fig. 1

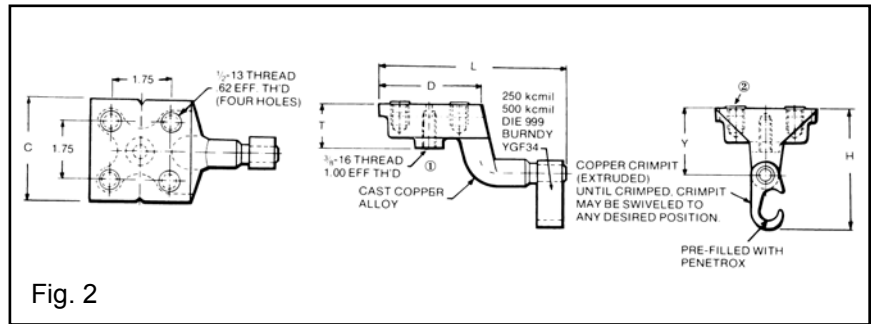


Fig. 2

NOTES:

① This tapped hole may be used to position the grounding plate on a threaded rod prior to placement of the concrete. 3/8-16 thread with 1.00 EFF. Thread is standard. If other thread is required, add appropriate suffix code to catalog number. -50 (1/2-13, .94 EFF. Thread), -62 (5/8-11, .94 EFF. Thread) and -75 (3/4-10, .81 EFF. Thread) Example: YGF34-4N-50 is YGF34-4N with 1/2-13 Thread

② Plastic plugs are provided to keep dirt out of the threaded holes until the attachment of grounding terminals

Catalog Number	Fig. #	C	D	H	L	T	Y	Copper Conductor Range	Tapped Holes		Installation Tools, Die Set Cat. No., and (# of Crimps)		
									Size	Hole Centers	HYPRESS™		
											PAT750/ Y750/Y35/ Y39	Y45 ①	Y46 ②
YGF29-2N	1	2.00	3.25	3.62	5.78	1.31	2.00	2 AWG-250 kcmil	1/2 - 13	1-3/4	U997 (1)	U997 (1)	U997 (1)
YGF29-4N	2	3.25	3.25	3.62	5.78	1.31	2.00	2 AWG-250 kcmil	1/2 - 13	1-3/4	U997 (1)	U997 (1)	U997 (1)
YGF34-2N ③	1	2.00	3.25	4.62	5.40	1.31	2.19	250 kcmil-500 kcmil	1/2 - 13	1-3/4	U1011 (3)	S1011 (2)	P1011 (2)
YGF34-4N ③	2	3.75	3.75	4.62	5.90	1.31	2.19	250 kcmil-500 kcmil	1/2 - 13	1-3/4	U1011 (3)	S1011 (2)	P1011 (2)

① Where a "U" or "PU" die is recommended with the Y45 HYPRESS™, a PT6515 adapter must be used

② Where a "U" or "PU" die is recommended with the Y46 HYPRESS™, a PUADP-1 adapter must be used

③ These connectors can only be installed using the Y750, Y45 or Y46 HYPRESS™ with recommended dies, they cannot be installed with the Y35 or Y39 HYPRESS™

Blue highlighted items are industry standard and most frequently ordered.

# Grounding HYGROUND® Compression

BURNDY®

## TYPE YGIB

### GROUNDLINK™

An irreversible compression ground connection which allows attachment to a structural steel standard (angled) or wide flange (parallel) beam. Installed with a required 5-piece die set, Catalog PIBEAMKIT or UIBEAMKIT. Die index 1105. GROUNDLINK™ connectors are made of high-conductivity wrought copper and come pre-filled with PENETROX™ E compound and strip sealed. Order terminal mounting hardware separately.



IEEE-837

Connector shipped with thread protection studs only. Order TMHG kits separately.

E-22

#### NOTES:






Terminal connector to be ordered separately. When I-beam connector is used with type YGHA terminal, the connection meets IEEE 837. YGA-2N, YA-2N and other BURNDY® 2-hole NEMA copper terminals are suitable.

Order TMHG Terminal Mounting Hardware Kit separately. Kit consists of 2 studs, 2 flat washers, 2 lockwashers and 2 hex nuts.

Using the 1/4 hex key wrench, screw the stud into the connector until stud bottoms out in connector. Install a YGHA terminal, flat washer, lockwasher and hex nut onto stud. Tighten and torque to 480 pound-inches.

Dimensions shown in i-Beam Flange Thickness column reflect the minimum dimensions required on a beam to properly install the i-Beam connector.

To correctly determine the appropriate YGIB connector to use based on flange thickness, order either YGIBGAUGE1 or YGIBKIT1 (KIT1 contains wiremike).

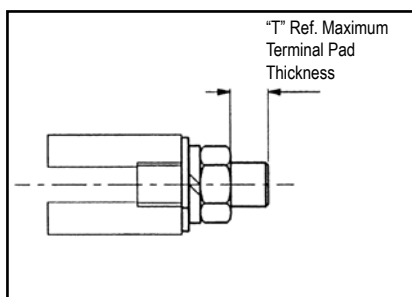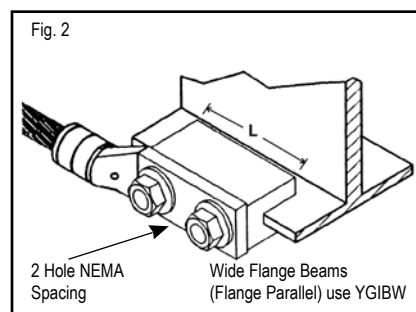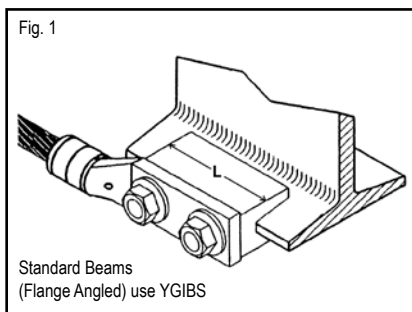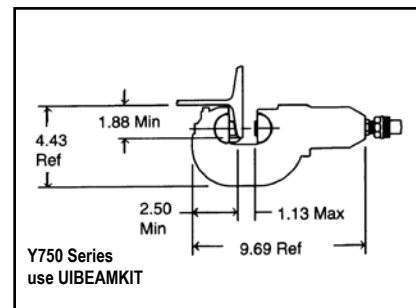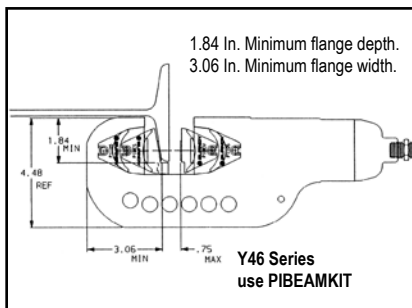

#### TERMINAL MOUNTING HARDWARE

Catalog Number	"T"
<b>TMHG-42</b>	0.42
<b>TMHG-92</b>	0.92

NOTE: Use TMHG-92 to double stack lugs.

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175

www.burndy.com

Canada: 1-800-387-6487

TYPE YGIB

GROUNDLINK™ CONNECTOR

(Continued)

Catalog Number	Copper Conductor Size	Fig. #	L	J	I-Beam Flange Thickness	Suggested Terminals		T
						Copper Conductor	Terminal	
YGIBS28-338-2N	2 AWG-4/0 AWG	1	3.00	1/2-13	0.250" - 0.338"	#2 Str. AWG	YGHA2C-2N	0.26
						1/0 Str. AWG	YGHA25-2N	0.19
YGIBW28-338-2N	2 AWG-4/0 AWG	2	3.00	1/2-13		2/0 Str. AWG	YGHA26-2N	0.26
						4/0 Str. AWG	YGHA28-2N	0.30
YGIBS34-338-2N	250 kcmil-500 kcmil	1	6.00	1/2-13		250 kcmil	YGHA29-2N	0.34 0.40
YGIBW34-338-2N	250 kcmil-500 kcmil	2	6.00	1/2-13		500 kcmil	YGHA34-2N	0.34 0.40
YGIBS28-400-2N	2 AWG-4/0 AWG	1	3.00	1/2-13	0.338" - 0.400"	#2 Str. AWG	YGHA2C-2N	0.26
						1/0 Str. AWG	YGHA25-2N	0.19
YGIBW28-400-2N	2 AWG-4/0 AWG	2	3.00	1/2-13		2/0 Str. AWG	YGHA26-2N	0.26
						4/0 Str. AWG	YGHA28-2N	0.30
YGIBS34-400-2N	250 kcmil-500 kcmil	1	6.00	1/2-13		250 kcmil	YGHA29-2N	0.34 0.40
YGIBW34-400-2N	250 kcmil-500 kcmil	2	6.00	1/2-13		500 kcmil	YGHA34-2N	0.34 0.40
YGIBS28-462-2N	2 AWG-4/0 AWG	1	3.00	1/2-13	0.400" - 0.462"	#2 Str. AWG	YGHA2C-2N	0.26
						1/0 Str. AWG	YGHA25-2N	0.19
YGIBW28-462-2N	2 AWG-4/0 AWG	2	3.00	1/2-13		2/0 Str. AWG	YGHA26-2N	0.26
						4/0 Str. AWG	YGHA28-2N	0.30
YGIBS34-462-2N	250 kcmil-500 kcmil	1	6.00	1/2-13		250 kcmil	YGHA29-2N	0.34 0.40
YGIBW34-462-2N	250 kcmil-500 kcmil	2	6.00	1/2-13		500 kcmil	YGHA34-2N	0.34 0.40
YGIBS28-550-2N	2 AWG-4/0 AWG	1	3.00	1/2-13	0.462" - 0.550"	#2 Str. AWG	YGHA2C-2N	0.26
						1/0 Str. AWG	YGHA25-2N	0.19
YGIBW28-550-2N	2 AWG-4/0 AWG	2	3.00	1/2-13		2/0 Str. AWG	YGHA26-2N	0.26
						4/0 Str. AWG	YGHA28-2N	0.30
YGIBS34-550-2N	250 kcmil-500 kcmil	1	6.00	1/2-13		250 kcmil	YGHA29-2N	0.34 0.40
YGIBW34-550-2N	250 kcmil-500 kcmil	2	6.00	1/2-13		500 kcmil	YGHA34-2N	0.34 0.40
YGIBS28-613-2N	2 AWG-4/0 AWG	1	3.00	1/2-13	0.550" - 0.613"	#2 Str. AWG	YGHA2C-2N	0.26
						1/0 Str. AWG	YGHA25-2N	0.19
YGIBW28-613-2N	2 AWG-4/0 AWG	2	3.00	1/2-13		2/0 Str. AWG	YGHA26-2N	0.26
						4/0 Str. AWG	YGHA28-2N	0.30
YGIBW34-613-2N	250 kcmil-500 kcmil	2	6.00	1/2-13		500 kcmil	YGHA34-2N	0.34 0.40
YGIBS28-675-2N	2 AWG-4/0 AWG	1	3.00	1/2-13		0.613" - 0.675"	#2 Str. AWG	YGHA2C-2N
					1/0 Str. AWG		YGHA25-2N	0.19
YGIBW28-675-2N	2 AWG-4/0 AWG	2	3.00	1/2-13	2/0 Str. AWG		YGHA26-2N	0.26
					4/0 Str. AWG		YGHA28-2N	0.30
YGIBS34-675-2N	250 kcmil-500 kcmil	1	6.00	1/2-13	250 kcmil 500 kcmil		YGHA29-2N	0.34 0.40
YGIBW34-675-2N	250 kcmil-500 kcmil	2	6.00	1/2-13	500 kcmil		YGHA34-2N	0.34 0.40
YGIBW28-750-2N	2 AWG-4/0 AWG	3	3.00	1/2-13	0.690" - 0.750"	4/0 Str. AWG	YGHA28-2N	0.30
YGIBW28-1000-2N	2 AWG-4/0 AWG	3	3.00	1/2-13	1.000" - 1.060"	2/0 Str. AWG	YGHA2C-2N	0.26
						4/0 Str. AWG	YGHA28-2N	0.30

E-23

Blue highlighted items are industry standard and most frequently ordered.


## TYPE GSTUD-HY

### VERSITAIL™

Structural Steel Grounding Connector

### INSTALLATION

1. Weld the VERSITAIL™ to the steel member.
2. Select the proper connector for your specific application.

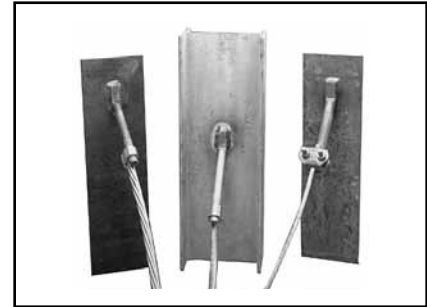

### Features & Benefits


- The VERSITAIL™ may be welded to steel surfaces quickly and easily with normal construction equipment.
- The VERSITAIL™ eliminates costly disk grinding and the need to expose virgin metal, the welding process burns through the oxidation and "scale" to establish excellent electrical grounding continuity.
- The VERSITAIL™ may be installed by the welder in the field or at the steel fabricator based on customer preference.
- The VERSITAIL™ pure copper coating over low carbon, hot rolled steel is compatible with standard welding processes, no toxic gasses are generated.
- The VERSITAIL™ knurled surface is copper plated and specifically designed to ensure excellent mechanical gripping and electrical integrity for BURNDY® compression and mechanical connectors in all grounding applications.
- The VERSITAIL™ may be installed during adverse weather conditions thus eliminating costly construction delays.
- Low installation cost.
- No drilling
- No cleaning
- No special preparation
- Low Carbon, hot rolled steel
- Pure copper plated finish

#### FOR COMPRESSION CONNECTORS

Select the proper BURNDY® "YGHP," connector. Clean the conductor, join the VERSITAIL™ and the grounding conductor together with the recommended tool and die set, then crimp the connector over the knurled area of the VERSITAIL™.

#### FOR MECHANICAL CONNECTORS

Select the properly sized BURNDY® connector. Clean the conductor, then apply PENETROX™ E oxide inhibiting compound on the contact area for increased effectiveness and service life. Put the connector over the knurled area of the VERSITAIL™ and apply the recommended torque value for correct installation.

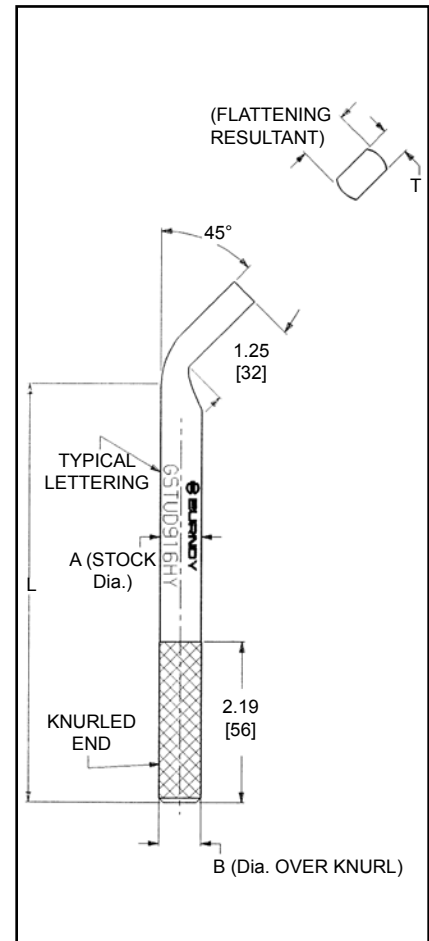

Catalog Number	Nom Rod Size	A	B	L	T	Electrical Equivalent Copper Conductor Size (AWG)*
<b>GSTUD14HY</b>	1/4"	0.25	0.26	4.81	0.19	#6
<b>GSTUD38HY</b>	3/8"	0.38	0.39	5.81	0.25	#3
<b>GSTUD916HY</b>	9/16"	0.56	0.57	5.68	0.38	1/0
<b>GSTUD34HY</b>	3/4"	0.75	0.76	5.81	0.51	4/0

\* This is the equivalent rating for continuous service.  
Large conductors may be connected using both compression and bolted connectors in potential ground fault applications.




Blue highlighted items are industry standard and most frequently ordered.



TYPES YGT & YTTAG

Static Grounding Receptacle

Type YGT static grounding receptacles are designed for static grounding of equipment. The receptacle is connected to the ground grid with HYGROUND® compression connectors and finished flush with surface to provide a permanent corrosion proof grounding point.

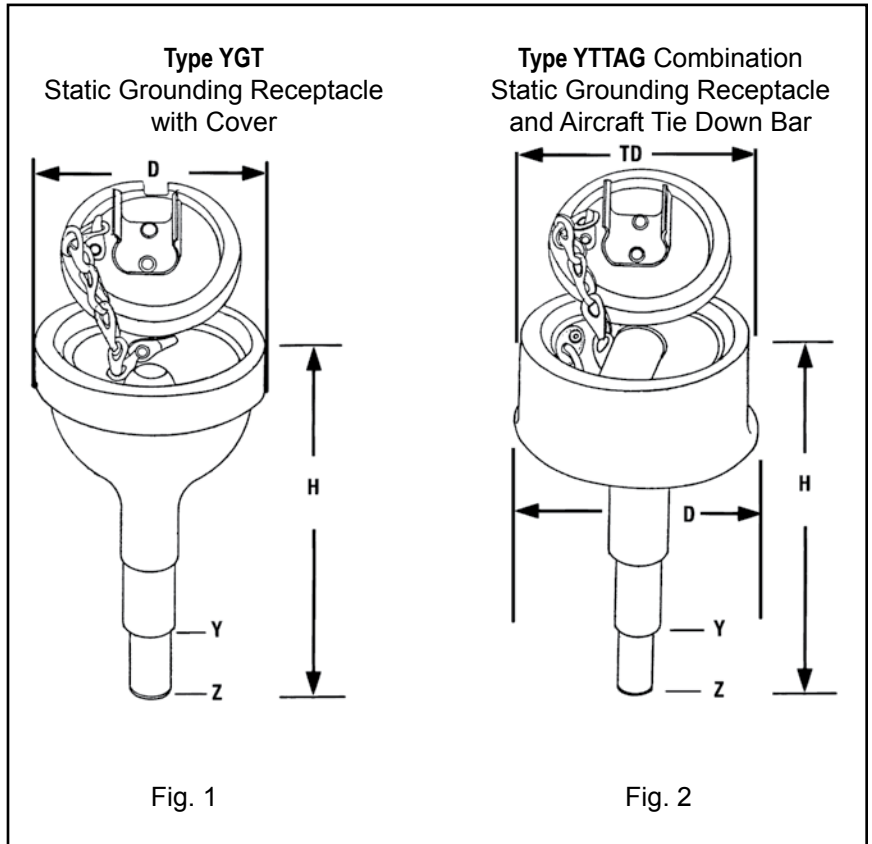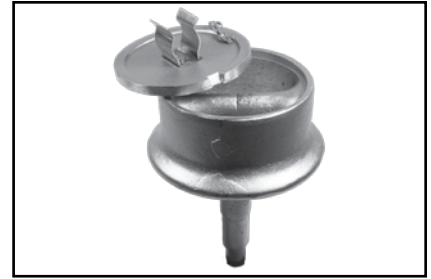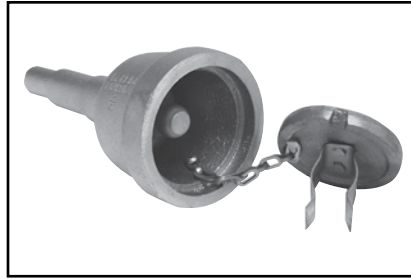

E-25

Catalog Number	Fig. #	HYGROUND® Connector	H	D	Y Dia	Z Dia	TD
YGT275	1	Select suitable YGHR, YGHP or YGLR for 3/4" ground rod and sized to ground conductor.	5.50	2.75	0.75	0.56	-
YTTAG388	2		6.50	4.75	0.75	0.56	4.30






**NOTES:**  
Install YGHR, YGHP or YGLR on Hub Y. Hub Z is inserted into 1/2" rigid conduit. The conduit is driven into the earth to provide support and provide correct level of receptacle prior to cement pour.

Blue highlighted items are industry standard and most frequently ordered.

## TYPE YG-B

### Bus Bar Connector

The BURNDY® YG-B series of compression bus bar connectors are ideally suited for cellular tower, bus bar and flat steel applications and is easier to use than exothermic connections. These high conductivity copper connectors allow attachment of a ground conductor to a bus bar or flat steel, with just one crimp using a BURNDY® Y750/PAT750-style HYPRESS™ head and the U1105 die set. The exclusive design allows the user to attach tap conductor(s) to 1/4" (1/8" to 1/4" if using the YG14BTC28) thick copper bus bar or flat steel. Most connectors are suitable for 1 or 2 conductors for power or grounding and bonding applications. Prefilled with PENETROX™ compound with the addition of a grit material and strip sealed.

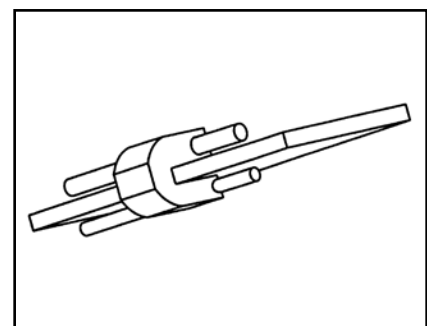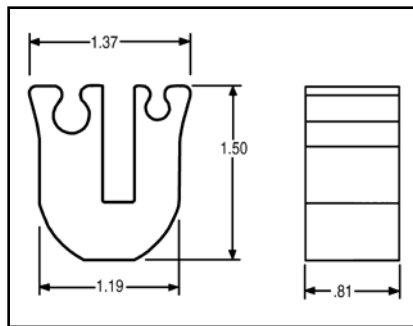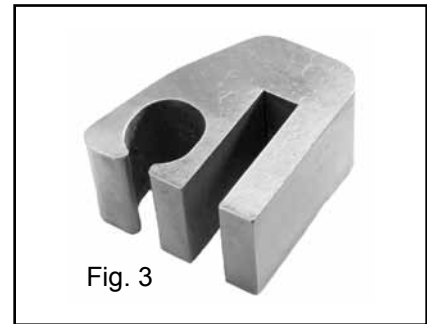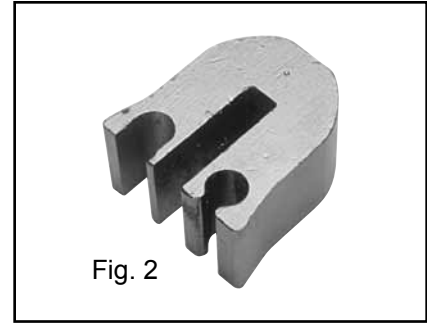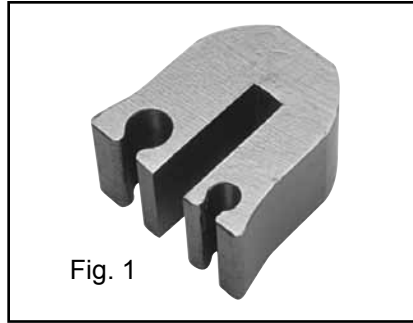

E-26

Catalog Number	Figure #	Ground Bar Thickness	BusBar Tap Conductors	Tooling	Installation Die	# of Crimps
<b>YG14B2TC2C6C</b> ①	1	1/4"	#2 Sol. and/or Str. Copper #6 Sol. and/or Str. Copper	PAT750, Y750	U1105	1
<b>YG14B2TC2C2C</b> ②	2	1/4"	#2 #2	PAT750, Y750	U1105	1
<b>YG14BTC28</b> ③	3	1/8" - 1/4"	4/0 AWG Str. to 1/0 AWG Str. Copper	PAT750, Y750	U1105	1

- ① UL Listed, CSA Certified, Rated for Direct Burial; can accept 1 or 2 conductors
- ② U-shaped tap groove can only be used with #2 Solid wire; can accept 1 or 2 conductors; suitable for continuous uncut conductor applications
- ③ cULus Listed, Rated for Direct Burial; can accept only 1 conductor

Blue highlighted items are industry standard and most frequently ordered.

**MECHANICAL GROUNDING  
CONNECTORS**

More than 60 years of technological innovation has made BURNDY® mechanical grounding connectors one of the most widely used, highly respected lines in the industry. There is virtually no grounding application problem that this diversified line cannot help solve.

All BURNDY mechanical grounding connectors have been designed for easy installation and for outstanding durability. Only the finest high copper alloys are used in their manufacture, ensuring top performance under the most extreme environmental conditions.


UL467 Listed for direct burial applications in earth or concrete.

**TYPES KC, K2C**


**SERVIT POST™**

For Copper Cable to Flat

SERVIT POST™ used to ground one or two cables to steel structures, fence posts, transformers. Also used to tap one or two cables from bus bar. One-wrench installation.

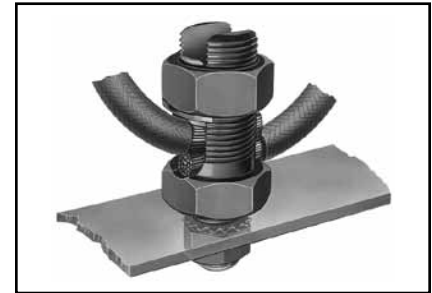

E-27

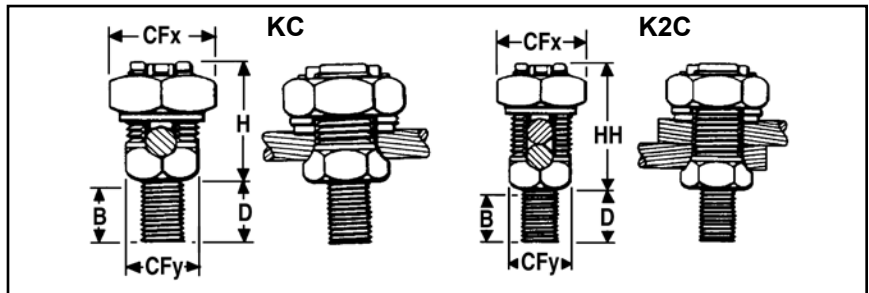

TYPE KC One Wire	TYPE K2C One or Two Wires	Stranded	Solid	Stud Diameter	B	CFx	CFy	D	H	HH
KC15**	K2C15**	12 AWG-9 AWG	12 AWG-8 AWG	1/4 -20	3/8	1/2	3/8	1/2	5/8	7/8
KC15B1	K2C15B1	12 AWG-9 AWG	12 AWG-8 AWG	1/4 -20	7/8	1/2	3/8	1	5/8	7/8
KC17	K2C17	10 AWG-7 AWG	10 AWG-6 AWG	1/4 -20	3/8	5/8	7/16	1/2	7/8	1
KC17B1	K2C17B1	10 AWG-7 AWG	10 AWG-6 AWG	1/4 -20	7/8	5/8	7/16	1	7/8	1
KC20	K2C20	10 AWG-5 AWG	10 AWG-4 AWG	5/16 -18	13/32	11/16	1/2	5/8	7/8	1-1/8
KC20B1	K2C20B1	10 AWG-5 AWG	10 AWG-4 AWG	5/16 -18	27/32	11/16	1/2	1	7/8	1-1/8
KC22	K2C22	10 AWG-3 AWG	10 AWG-2 AWG	3/8 -16	15/32	3/4	5/8	5/8	1	1-1/4
KC22B1	K2C22B1	10 AWG-3 AWG	10 AWG-2 AWG	3/8 -16	31/32	3/4	5/8	1-1/8	1	1-1/4
KC23	K2C23	8 AWG-2 AWG	10 AWG-1 AWG	3/8 -16	15/32	13/16	5/8	5/8	1	1-3/8
KC23B1	K2C23B1	8 AWG-2 AWG	10 AWG-1 AWG	3/8 -16	31/32	13/16	5/8	1-1/8	1	1-3/8
KC25	K2C25	2 AWG-1/0 AWG	2 AWG-2/0 AWG	1/2 -13	9/16	15/16	3/4	3/4	1-1/8	1-5/8
KC25B1	K2C25B1	2 AWG-1/0 AWG	2 AWG-2/0 AWG	1/2 -13	1-1/16	15/16	3/4	1-1/4	1-1/8	1-5/8
KC26	K2C26	2 AWG-2/0 AWG	2 AWG-3/0 AWG	1/2 -13	17/32	1	7/8	3/4	1-3/8	1-7/8
KC26B1	K2C26B1	2 AWG-2/0 AWG	2 AWG-3/0 AWG	1/2 -13	1-1/16	1	7/8	1-1/4	1-3/8	1-7/8
KC28	K2C28	1 AWG-4/0 AWG	1 AWG-4/0 AWG	5/8 -11	3/4	1-1/2	1-3/16	1	1-3/4	2-1/4
KC28B1	K2C28B1	1 AWG-4/0 AWG	1 AWG-4/0 AWG	5/8 -11	1-1/4	1-1/2	1-3/16	1-1/2	1-3/4	2-1/4
KC28G3	K2C28G3	1 AWG-4/0 AWG	1 AWG-4/0 AWG	1/2 -13	1-1/4	1-1/2	1-3/16	1-1/2	1-3/4	2-1/4
KC31	K2C31	1 AWG-350 kcmil	N/A	5/8 -11	3/4	1-11/16	1-3/8	1	2-1/4	2-7/8
KC31B1	K2C31B1	1 AWG-350 kcmil	N/A	5/8 -11	1-1/4	1-11/16	1-3/8	1-1/2	2-1/4	2-7/8
KC34	K2C34	3/0 AWG-500 kcmil	N/A	3/4 -10	1	2	1-5/8	1-1/4	2-3/8	3-1/4
KC34B1	K2C34B1	3/0 AWG-500 kcmil	N/A	3/4 -10	1-1/2	2	1-5/8	1-3/4	2-3/8	3-1/4

NOTE:

\*\* Not UL 467 rated

Add "-NSP" suffix to catalog numbers to have connector supplied with split lockwasher and nut.


**Blue highlighted items are industry standard and most frequently ordered.**

## TYPE KCKF

### Bulkhead Ground Connector

The "Bulkhead" connector is designed to allow a ground wire to be connected from the inside of a box or enclosure to the outside of a box or enclosure.


This new connector is supplied in kit form with a male SERVIT POST™, female SERVIT®, (2) stainless steel washers, split lock washer and sealing washer.

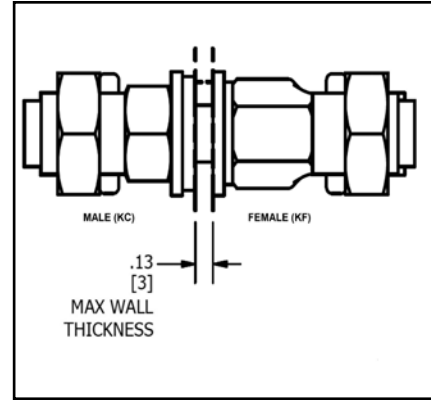

### Features & Benefits

- Provides an easy way to connect ground wires "through" an enclosure wall
- Includes Male SERVIT POST™, Female SERVIT®, (2) Stainless Steel Washers, Split Lock Washer, Sealing Washer
- Split Lock Washer allows adjustment of conductor orientation
- Made of Silicon Bronze material (connectors) and Stainless Steel Hardware, Sealing Washer
- Meets NEMA 4X requirements when installed correctly
- Application Guideline document available
- Industry proven split bolt/SERVIT POST™ technology

The available "Application Guideline" document helps describe the application with visuals and installation examples.

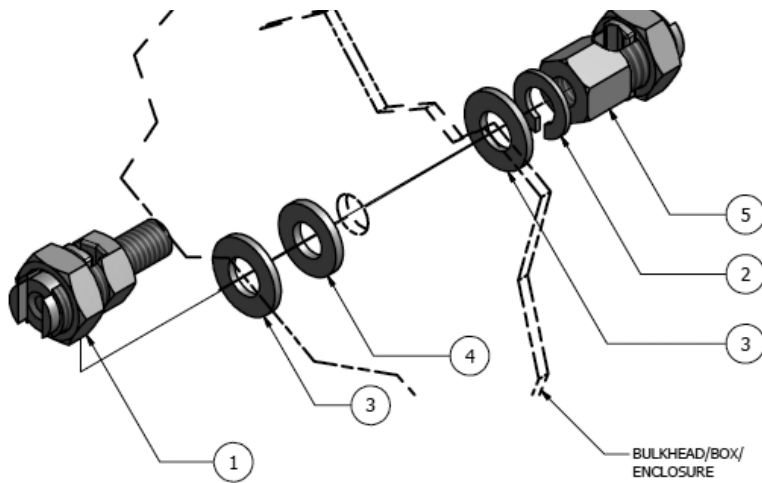

	Qty	Description
1	1	Male Servit Post
2	1	Stainless Steel Split Lock Washer*
3	2	Stainless Steel Flat Washer*
4	1	Sealing Washer*
5	1	Female SERVIT®

\*One flat washer and sealing washer to be installed on outside of box or, where applicable, to side of wall exposed to atmospheric or contaminated conditions. Remaining hardware to be mounted to opposite side of the wall as shown.

Catalog Number	ACCOMMODATES			NUT TORQUE IN-LBS [N-M]	MAX. THRU HOLE
	AWG		METRIC		
	STRANDED	SOLID	STRANDED		
<b>KCKF23</b>	#8 (.146) - #2 (.292)	#10 (.102) - #1 (.289)	10mm <sup>2</sup> (4.1) - 35mm <sup>2</sup> (6.5)	275 [31.1]	7/16
<b>KCKF25</b>	#2 (.292) - 1/0 (.373)	#2 (.258) - 2/0 (.365)	35mm <sup>2</sup> (6.5) - 50mm <sup>2</sup> (9.3)	385 [43.5]	9/16
<b>KCKF28</b>	#1 (.332) - 4/0 (.528)	#1 (.289) - 4/0 (.460)	50mm <sup>2</sup> (9.3) - 95mm <sup>2</sup> (12.8)	500 [56.5]	11/16

#### Notes:

- Dimensions in ( ) are cable diameters.
- Diameters of AWG wires are in inches.
- Diameters for metric wires are given in mm.


Blue highlighted items are industry standard and most frequently ordered.

**TYPES KC-J12, EQC632C**

**Transformer Ground Connectors**

For Copper

Fits all standard EEL-NEMA distribution transformers as tank grounding terminal.

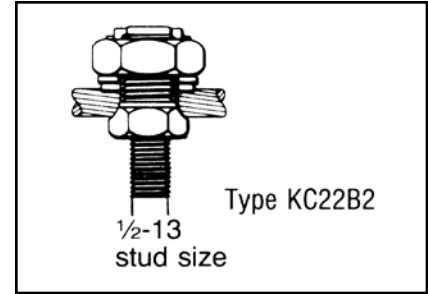

Catalog Number	Ranges
KC22J12T13	8 Sol. - 2 Sol.
<b>KC26</b>	2 Sol. - 2/0 Str.
KC34J12T13	3/0 - 500 Str.
EQC632C	8 Sol. - 2 Str.


E-29

**TYPE KS**

**SERVIT®**

For Copper

UL467 Listed for direct burial applications in earth or concrete. Compact, highstrength, high copper alloy SERVIT® split-bolt has free-running threads and easy to grip wrench flats. Highly resistant to cracking and corrosion.

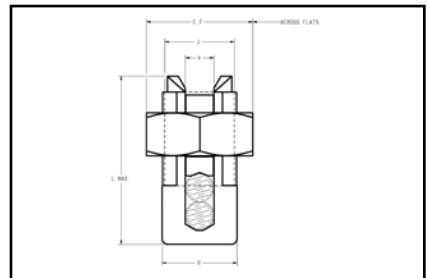



Catalog Number	Cross Flats	L	W	Copper Conductor Range	Rebar with (1) #8 Sol. Cu	Recommended Tightening Torque (in-lb)
<b>KS15</b>	0.50	0.85	0.38	10 - 8 Str.	14 Str.	#8
<b>KS17</b>	0.63	1.14	0.45	8 Str. - 6 Sol.	14 Str.	#6
<b>KS20</b>	0.69	1.20	0.51	8 Str. - 4 Sol.	14 Str.	#4
<b>KS22</b>	0.75	1.50	0.60	6 Str. - 2 Sol.	14 Str.	#2
<b>KS23</b>	0.82	1.54	0.62	6 Str. - 2 Str.	14 Str.	#1
<b>KS25</b>	0.94	1.77	0.73	4 Str. - 1/0 Str.	14 Str.	2/0
<b>KS26</b>	1.05	1.94	0.82	2 Str. - 2/0 Str.	14 Str.	3/0
<b>KS27</b>	1.36	1.86	1.17	1 Str. - 3/0 Str.	8 Sol.	—
<b>KS29</b>	1.36	2.07	1.17	1 Str. - 250	8 Str.	4/0
<b>KS31</b>	1.70	2.51	1.41	1/0 Str. - 350	1/0 Str.	—
<b>KS34</b>	1.82	2.79	1.48	2/0 Str. - 500	2/0 Str.	—

Blue highlighted items are industry standard and most frequently ordered.

## TYPE GKA

For Copper

UL467 Listed for direct burial applications in earth or concrete. One-piece body construction insures mechanical integrity in an underground environment. Supplied with stainless steel headless screw, the GKA25SB and GKA28SB have silicon bronze hardware.

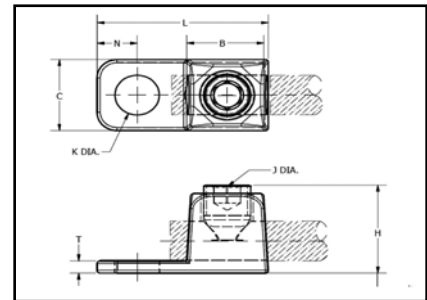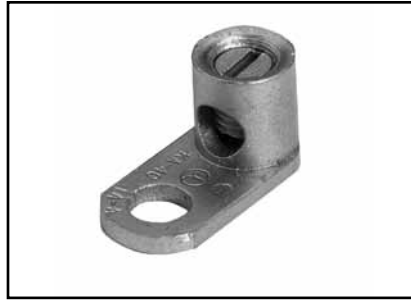

E-30




Catalog Number	Cable Range	B	C	H	J Dia.	K	L
<b>GKA8C*</b>	10 AWG-8 AWG	0.31	0.38	0.58	#12-24 (Slot)	0.21	0.81
<b>GKA4C*</b>	14 AWG-4 AWG	0.46	0.54	0.71	5/16-24 (Slot)	0.28	1.13
<b>GKA25</b>	4 AWG-1/0 AWG	0.69	0.75	0.94	1/2-20 (Hex)	0.42	1.69
<b>GKA28</b>	1 AWG-4/0 AWG	0.81	0.94	1.25	5/8-18 (Hex)	0.42	1.94
<b>GKA25SB</b>	4 AWG-1/0 AWG	0.69	0.75	0.94	1/2-20 (Hex)	0.42	1.69
<b>GKA28SB</b>	1 AWG-4/0 AWG	0.81	0.94	1.25	5/8-18 (Hex)	0.42	1.94

\* GKA8C, GKA4C are cULus Listed.

## TYPE KPB


For Copper

UL467 Listed for direct burial in earth or concrete. UL486 listed. This exclusive BURNDY® design accommodates #10 - #4 copper where continuous conductor runs are preferable.

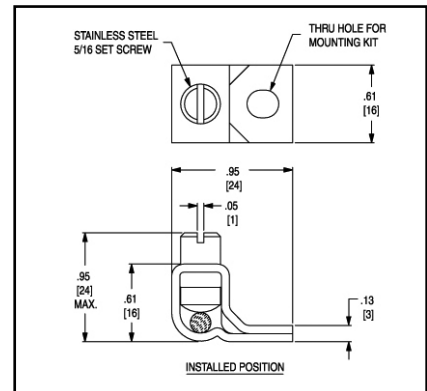

Catalog Number	Copper Cable Range	Stud Hole
<b>KPB4CG1</b> ①	10 AWG-4 AWG	#10

①Can be assembled with optional TMH322SS stainless steel hardware kit, ordered separately.

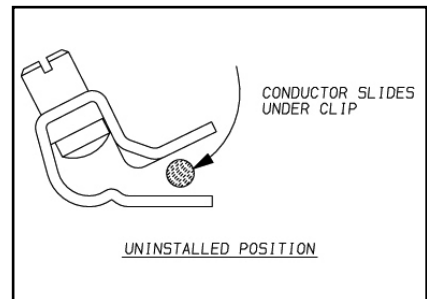


Blue highlighted items are industry standard and most frequently ordered.

**TYPES CL50-1 & CL50-1TN**

**COPPER LAY-IN QIKLUG™**

For Copper

The Lay-In QIKLUG™ is manufactured from high strength pure electrolytic copper to ensure maximum strength and conductivity. UL467 Listed for direct burial in earth or concrete. The open-faced design allows for fast lay-in of the conductor without the need for cutting or breaking. Stainless steel screws used for excellent corrosion resistance.

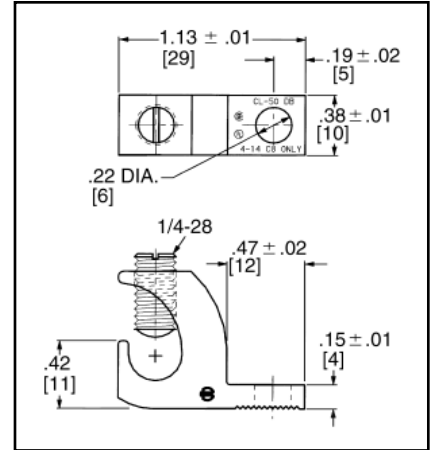

Catalog Number	Conductor Range	Stud Hole
<b>CL50-1</b>	14 AWG-4 AWG	#10
<b>CL50-1TN</b>	14 AWG-4 AWG	#10
<b>CL50-1TN BULK</b>	14 AWG-4 AWG	#10

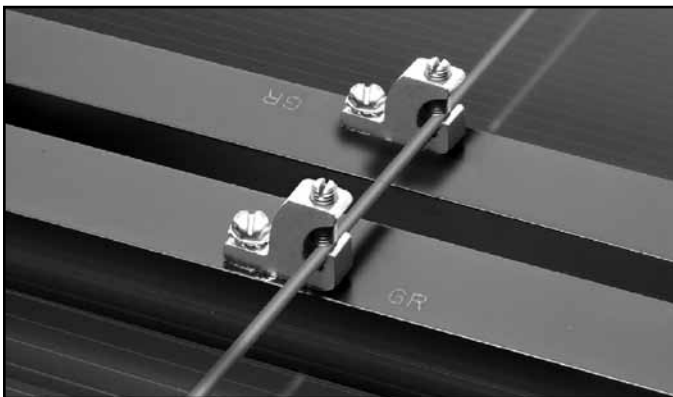


Photo above shows a typical solar panel installation using CL50-1TN connectors.





**TYPE CL**

**COPPER LAY-IN QIKLUG™**

FOR COPPER

Manufactured for maximum strength and conductivity, these lay-in lugs allow for continuous runs of conductor and are well suited as terminations as well. Tin-plated, set screw style connectors, three sizes cover a range from #14AWG to 250 kcmil. CL3/0-516TN and CL250-516TN are UL Listed and CSA certified. CL1/0-14TN UL Listed for grounding and CSA certified. 90° C rated. Suitable for copper conductors only.

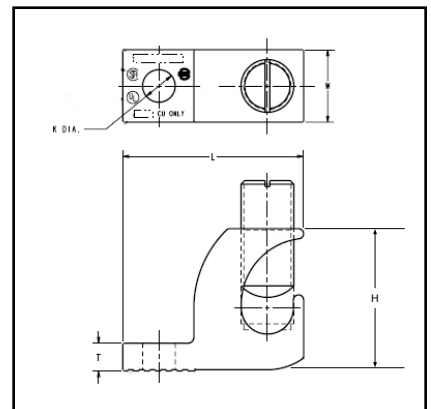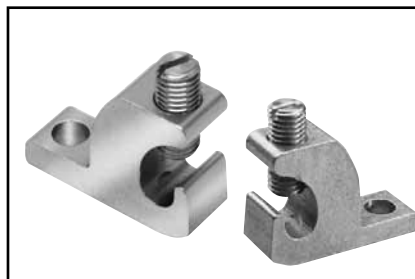

Catalog Number	Wire Range Copper	H	W	L	T	K Dia.	Hex Size
<b>CL1/0-14TN</b>	#14 - 1/0 AWG	1.17	0.60	1.50	0.22	0.27	7/16-20 (Slotted)
<b>CL3/0-516TN</b>	#6 - 3/0 AWG	1.56	0.80	2.00	0.30	0.33	9/16-18 (0.25 Hex)
<b>CL250-516TN</b>	#6 AWG - 250 kcmil	1.79	0.80	2.20	0.30	0.33	9/16-18 (0.25 Hex)



Blue highlighted items are industry standard and most frequently ordered.


## WEEB™ Washers and other products for Solar Photovoltaic applications

WILEY is most widely recognized for the invention of the WEEB™ Washer (Washer, Electrical Equipment Bond). WILEY has always been dedicated to developing and providing innovative, high-quality solutions that address the evolving needs of the PV industry in bonding, grounding, and wire management. Our engineers work closely with solar manufacturers and installers, and develop products to enable customers to install PV systems safely, efficiently, and cost effectively. BURNDY now offers the complete line of unique solutions for Balance of System components for photovoltaic applications.

For system compatibility please check the website: [www.we-llc/technical.html](http://www.we-llc/technical.html).


**WEEB-DSK516**

*Installed on a purlin.*

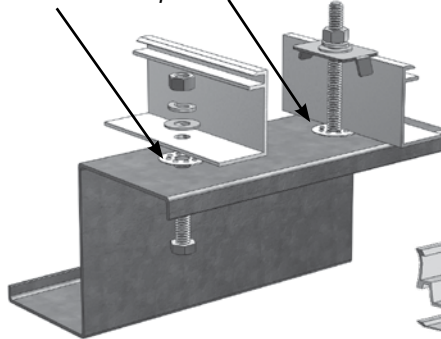

**WEEB-BNDJMP6.7**



*Installed on a mounting rail.*

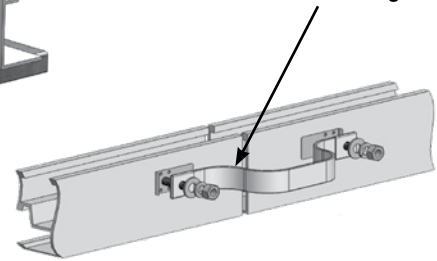

**WEEB-LUG-6.7**

**WEEB-LUG-6.7**

*Installed on the channel of a mounting rail.*

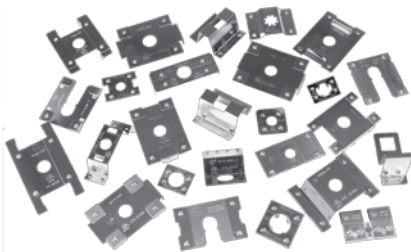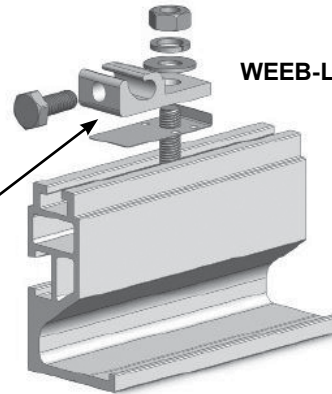

### WEEB™ Washer, Electrical Equipment Bond

- Bonds PV modules to mounting structures
- Specialized teeth on washer embeds into anodized aluminum to establish gas-tight electrical connection
- Corrosion resistant 304 Stainless Steel
- Stock parts for most popular mounting systems
- Custom WEEB™ washer designs available
- ETL Listed to UL 467
- UL Recognized to UL 2703

### WEEB™ Lug

- Corrosion resistant, tin plated, copper lay-in lug
- Features WEEB™ washer technology
- Available assembled or unassembled
- ETL Listed to UL 467

### WEEB™ Bonding Jumper

- Corrosion resistant, tin plated, copper braid
- Maintains electrical bond across spliced rails
- Features WEEB™ washer technology
- Equivalent to #6 AWG copper conductor
- Available assembled or unassembled
- ETL Listed to UL 467

**Blue highlighted items are industry standard and most frequently ordered.**




**WEEB™ Washers and other products for Solar Photovoltaic applications**




**Cable Clips**

- Attaches to module frames or racking systems
- Corrosion resistant 304 Stainless Steel
- Easy installation and removal
- Prevents damage to cables
- Sized for USE-2, PV, and Micro Inverter cable leads

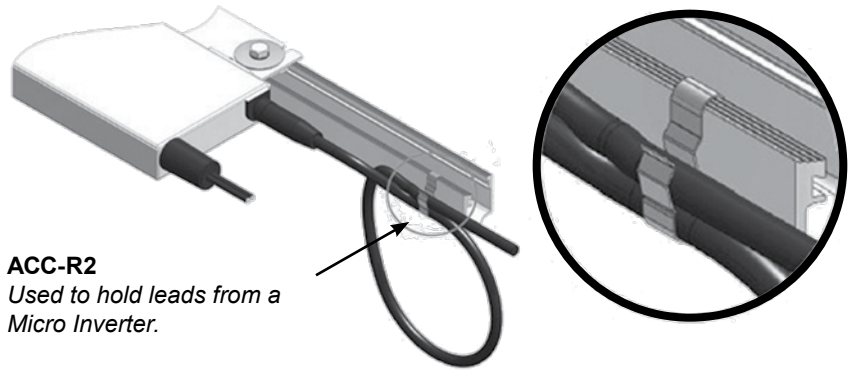


**ACC-R2**  
Used to hold leads from a Micro Inverter.

**ACC-F90**  
Used to hold USE-2 or PV wire. Mounts to module frame in either a vertical or horizontal orientation.

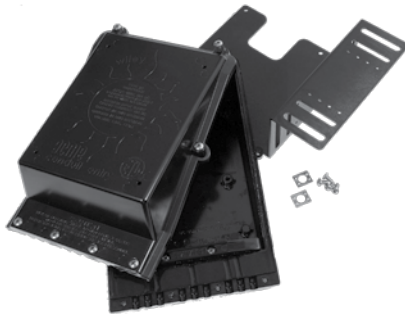


**Conduit Entry Box**


- Pass-through or combiner box with mounting bracket
- Compatible with a variety of conduit
- Two-piece protective enclosure for transitioning PV array wire to other wiring means
- ETL Listed to UL 1741 Listed
- NEMA 3R outdoor rated
- Available up to 4 strings

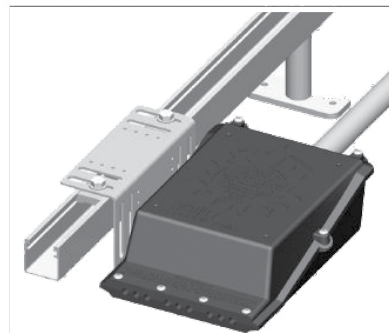

**Rail Mounted**

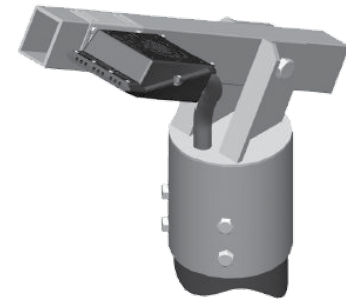

**Pole Mounted**



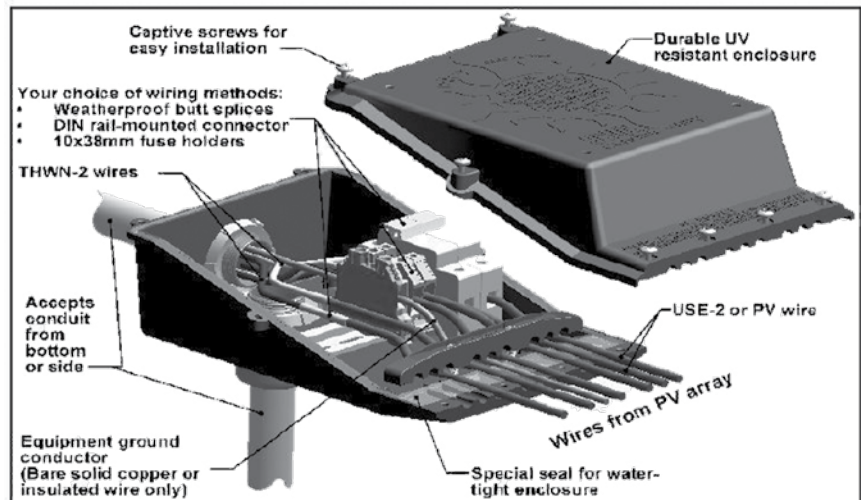


**Blue highlighted items are industry standard and most frequently ordered.**

## TYPE GAR

For Parallel or 90° Copper Cable Connection to Rod or Pipe with the Same Connector

High copper alloy ground connector for joining a range of cable, parallel or at right angles to rod or tube. Especially good for fence posts. High copper alloy cast body with DURIMUM™ U-bolts, nuts and lockwashers, permit entire connection to be buried in ground or concrete without danger of corrosion.

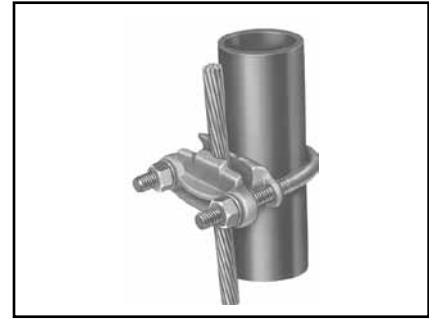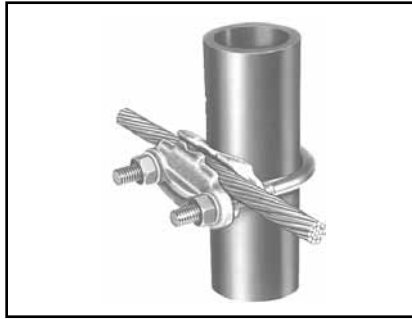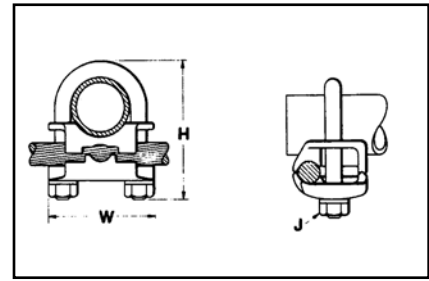

Wire at Right Angle to Pipe

Wire Parallel to Pipe

E-34

### Features & Benefits

- Wire to Rebar
- Fence Post Grounding Connector
- Wire to Pipe
- One-wrench installation
- UL467 Listed
- Acceptable for direct burial



Catalog Number	Conductor				H	J	W
	Tube I.P.S.*	Rod Size or O.D. Range	Rebar Size	Cable Range			
<b>GAR114C</b>	1/4	1/2	—	8 Sol. - 4 Str.	2-1/2	3/8	1-7/8
<b>GAR1126</b>	1/4	1/2	—	4 Sol. - 2/0 Str.	2-1/2	3/8	1-7/8
<b>GAR1129</b>	1/4	1/2	—	2/0 Sol. - 250	2-1/2	3/8	1-7/8
<b>GAR644C</b>	3/8	5/8 - 3/4	5 - 6	8 Sol. - 4 Str.	2-7/8	3/8	2-1/8
<b>GAR6426</b>	3/8	5/8 - 3/4	5 - 6	4 Sol. - 2/0 Str.	2-7/8	3/8	2-1/8
<b>GAR6429</b>	3/8	5/8 - 3/4	5 - 6	2/0 Sol. - 250	2-7/8	3/8	2-1/8
<b>GAR6434</b>	3/8	5/8 - 3/4	5 - 6	300-500	3-1/2	1/2	2-1/2
<b>GAR144C</b>	1/2-3/4	7/8 - 1	7 - 8	8 Sol. - 4 Str.	2-3/4	3/8	2-3/8
<b>GAR1426</b>	1/2-3/4	7/8 - 1	7 - 8	4 Sol. - 2/0 Str.	3	3/8	2-3/8
<b>GAR1429</b>	1/2-3/4	7/8 - 1	7 - 8	2/0 Sol. - 250	3	3/8	2-3/8
<b>GAR1434</b>	1/2-3/4	7/8 - 1	7 - 8	300-500	3-3/4	1/2	2-3/4
<b>GAR154C</b>	1	1-1/8 - 1-1/4	9 - 10	8 Sol. - 4 Str.	2-7/8	3/8	2-5/8
<b>GAR1526</b>	1	1-1/8 - 1-1/4	9 - 10	4 Sol. - 2/0 Str.	2-7/8	3/8	2-5/8
<b>GAR1529</b>	1	1-1/8 - 1-1/4	8 - 9	2/0 Sol. - 250	3-3/8	3/8	2-5/8
<b>GAR1534</b>	1	1-1/8 - 1-1/4	9 - 10	300-500	4-1/2	1/2	2-5/8
<b>GAR164C</b>	1-1/4	1-3/8 - 1-1/2	11	8 Sol. - 4 Str.	3-1/2	3/8	3
<b>GAR1626</b>	1-1/4	1-3/8 - 1-1/2	11	4 Sol. - 2/0 Str.	3-1/2	3/8	3
<b>GAR1629</b>	1-1/4	1-3/8 - 1-1/2	11	2/0 Sol. - 250	3-1/2	3/8	3
<b>GAR1634</b>	1-1/4	1-3/8 - 1-1/2	11	300-500	4-1/4	1/2	3-3/8

\* This is the "Trade" Pipe Size reference.

Blue highlighted items are industry standard and most frequently ordered.

**TYPE GAR**  
(Continued)

Catalog Number	Conductor			H	J	W	
	Tube I.P.S.*	Rebar Size	Rod Size or O.D. Range				Cable Range
<b>GAR174C</b>	1-1/2	—	1-5/8 - 1-7/8	8 Sol. - 4 Str.	4	3/8	3-1/4
<b>GAR1726</b>	1-1/2	—	1-5/8 - 1-7/8	4 Sol. - 2/0 Str.	4	3/8	3-1/4
<b>GAR1729</b>	1-1/2	—	1-5/8 - 1-7/8	2/0 Sol. - 250	4	3/8	3-1/4
<b>GAR1734</b>	1-1/2	—	1-5/8 - 1-7/8	300 - 500	4-5/8	1/2	2-5/8
<b>GAR184C</b>	2	—	2-2 - 3/8	8 Sol. - 4 Str.	4-1/4	3/8	3-3/4
<b>GAR1826</b>	2	—	2-2 - 3/8	4 Sol. - 2/0 Str.	4-1/4	3/8	3-3/4
<b>GAR1829</b>	2	—	2-2 - 3/8	2/0 Sol. - 250	4-1/2	3/8	3-3/4
<b>GAR1834</b>	2	—	2-2 - 3/8	300 - 500	5-1/4	1/2	4-1/8
<b>GAR194C</b>	2-1/2	—	2-1/2 - 2-7/8	8 Sol. - 4 Str.	5	3/8	4-1/4
<b>GAR1926</b>	2-1/2	—	2-1/2 - 2-7/8	4 Sol. - 2/0 Str.	5	3/8	4-1/4
<b>GAR1929</b>	2-1/2	—	2-1/2 - 2-7/8	2/0 Sol. - 250	5	3/8	4-1/4
<b>GAR1934</b>	2-1/2	—	2-1/2 - 2-7/8	300 - 500	5-5/8	1/2	4-5/8
<b>GAR204C</b>	3	—	3 - 3-1/2	8 Sol. - 4 Str.	5-5/8	3/8	4-3/4
<b>GAR2026</b>	3	—	3 - 3-1/2	4 Sol. - 2/0 Str.	5-5/8	3/8	4-3/4
<b>GAR2029</b>	3	—	3 - 3-1/2	2/0 Sol. - 250	5-5/8	3/8	4-3/4
<b>GAR2034</b>	3	—	3 - 3-1/2	300 - 500	6-3/8	1/2	5-1/4
<b>GAR214C</b>	3-1/2	—	3-1/2 - 4	8 Sol. - 4 Str.	6-1/4	3/8	5-3/8
<b>GAR2126</b>	3-1/2	—	3-1/2 - 4	4 Sol. - 2/0 Str.	6-1/4	3/8	5-3/8
<b>GAR2129</b>	3-1/2	—	3-1/2 - 4	2/0 Sol. - 250	6-1/4	3/8	5-3/8
<b>GAR2134</b>	3-1/2	—	3-1/2 - 4	300 - 500	6-3/4	1/2	5-3/4
<b>GAR224C</b>	4	—	4 - 4-1/2	8 Sol. - 4 Str.	6-3/8	3/8	5-7/8
<b>GAR2226</b>	4	—	4 - 4-1/2	4 Sol. - 2/0 Str.	6-3/8	3/8	5-7/8
<b>GAR2229</b>	4	—	4 - 4-1/2	2/0 Sol. - 250	6-3/8	3/8	5-7/8
<b>GAR2234</b>	4	—	4 - 4-1/2	300 - 500	6-7/8	1/2	6-1/4
<b>GAR244C</b>	5	—	—	8 Sol. - 4 Str.	7-3/4	3/8	6-7/8
<b>GAR2426</b>	5	—	—	4 Sol. - 2/0 Str.	7-3/4	3/8	6-7/8
<b>GAR2429</b>	5	—	—	2/0 Sol. - 250	7-3/4	3/8	7-1/4
<b>GAR2434</b>	5	—	—	300 - 500	8-5/8	1/2	7-1/4
<b>GAR8629</b>	6	—	—	2/0 Sol. - 250	8-13/16	1/2	8-3/8
<b>GAR8634</b>	6	—	—	300 - 500	8-13/16	1/2	8-3/8

\* This is the "Trade" Pipe Size reference.

**NOTE:**


Contact BURNDY® for additional pipe and wire size combinations not shown.

Blue highlighted items are industry standard and most frequently ordered.

## TYPES GAR-BU AND GAR3902 SERIES

### Ground Connectors

Type GAR-BU is a high-conductivity copper ground connector for connecting a small to medium range copper ground conductor to water pipe as well as structural and reinforcing rod shapes. Universal acceptance of several sizes of cylindrical shapes makes this suitable for industrial construction and maintenance work as well as cathodic protection. Cable clamp swivels to permit parallel grounding of one pipe or 90° degree cable run for grounding several parallel pipes. Single wrench installation. UL467 Listed and CSA Certified.

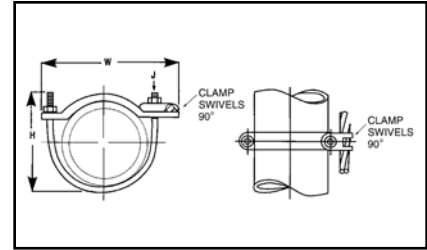

### Features & Benefits

- Cable clamp swivels at 90°
  - ◇ Permits parallel grounding of one pipe or a 90° cable run for grounding several parallel pipes.
- One-wrench installation
  - ◇ Simplified installation.
- DURIMUM™ silicon bronze hardware (-BU Series)\*
  - ◇ Long lasting corrosion resistance and acceptable for direct burial in earth or concrete.
- UL467 Listed
  - ◇ Provides quality assurance to recognized industry NEC standards from an independent party.

E-36



Catalog Number	Cable Range	IPS Size **	O.D. Range	H	J	W	Recommended Tightening Torque
<b>GAR3902-BU</b> ①	#4- 4/0 AWG	1/2-1	0.84 - 1.32	3.50	3/8" - 16	3.25	240 in. - lbs.
<b>GAR3903-BU</b> ①	#4- 4/0 AWG	1 1/4-2	1.66 - 2.38	4.00	3/8" - 16	4.25	240 in. - lbs.
<b>GAR3904-BU</b> ①	#4- 4/0 AWG	2 1/2-3 1/2	2.88 - 4.00	6.50	3/8" - 16	6.00	240 in. - lbs.
<b>GAR3905-BU</b> ①	#4- 4/0 AWG	4-5	4.50 - 5.56	7.50	3/8" - 16	7.50	240 in. - lbs.
<b>GAR3906-BU</b> ①	#4- 4/0 AWG	6	6.62	8.50	3/8" - 16	8.62	240 in. - lbs.
<b>GAR3907-BU</b> ①	#4- 4/0 AWG	8	8.62	10.00	3/8" - 16	10.62	240 in. - lbs.
<b>GAR3908-BU</b> ①	#4- 4/0 AWG	10	10.75	12.00	3/8" - 16	12.75	240 in. - lbs.
<b>GAR3909-BU</b> ①	#4- 4/0 AWG	12	12.75	14.00	3/8" - 16	14.75	240 in. - lbs.
<b>GAR3902</b>	#4- 4/0 AWG	1/2-1	0.84 - 1.32	3.50	3/8" - 16	3.25	240 in. - lbs.
<b>GAR3903</b>	#4- 4/0 AWG	1 1/4-2	1.66 - 2.38	4.00	3/8" - 16	4.25	240 in. - lbs.
<b>GAR3904</b>	#4- 4/0 AWG	2 1/2-3 1/2	2.88 - 4.00	6.50	3/8" - 16	6.00	240 in. - lbs.
<b>GAR3905</b>	#4- 4/0 AWG	4-5	4.50 - 5.56	7.50	3/8" - 16	7.50	240 in. - lbs.
<b>GAR3906</b>	#4- 4/0 AWG	6	6.62	8.50	3/8" - 16	8.62	240 in. - lbs.
<b>GAR3907</b>	#4- 4/0 AWG	8	8.62	10.00	3/8" - 16	10.62	240 in. - lbs.
<b>GAR3908</b>	#4- 4/0 AWG	10	10.75	12.00	3/8" - 16	12.75	240 in. - lbs.
<b>GAR3909</b>	#4- 4/0 AWG	12	12.75	14.00	3/8" - 16	14.75	240 in. - lbs.

NOTE:

① Type GAR-BU is supplied with DURIMUM™ silicon bronze hardware and is Listed for direct burial.

\*\* Refer to Section O for tube dimensions.

## TYPE GAR-RB

For Reinforcement Bar

NOTE:

UL 467 Listed for direct burial in earth or concrete.




Catalog Number	Rebar	I.P.S.	O.D. Range	Rod Size	Copper Conductor	
					Min.	Max.
<b>GAR644C-RB</b>	#3 - 6 (0.38 - 0.75)	3/8	0.63 - 0.75	5/8-3/4	8 Sol.	4 Str.

Blue highlighted items are industry standard and most frequently ordered.

**TYPE GAR-TC**




**Water Pipe  
Ground Connector**

Type GAR-TC is a high-conductivity copper ground connector that features a pre-drilled pad, allowing a 2-hole compression terminal to be directly connected to water pipe as well as structural and reinforcing rod shapes. Universal acceptance of several sizes of cylindrical shapes makes this suitable for industrial construction and maintenance work as well as telecommunications grounding. Terminal may be mounted parallel, 45° or 90° degrees to the pipe. Acceptable for direct burial.

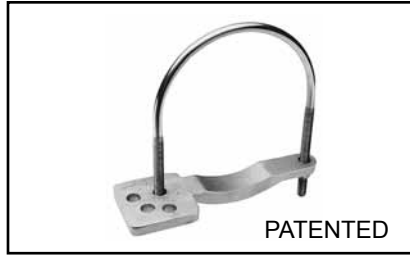

**Features & Benefits**

- Large, smooth connector contact area between pipe and ground clamp
  - ◇ Provides large surface contact area to maximize contact area between connector and pipe.
- The GAR-TC mounting pad permits parallel, 45° or 90° angle connections to the pipe
  - ◇ Provides maximum flexibility for field installation.
- Pre-drilled pad for (2) 3/8" bolts on 1" centers
  - ◇ Allows direct mounting of (2) hole compression terminals up to 750 kcmil to pipe.
- DURIMUM™ silicon bronze hardware
  - ◇ Provide long lasting corrosion resistance acceptable for direct burial in earth or concrete.
- One-wrench installation
  - ◇ Simplified installation.
- UL467 Listed
  - ◇ Provides quality assurance to recognized industry NEC standards from an independent party. Type GAR-TC is acceptable for direct burial.

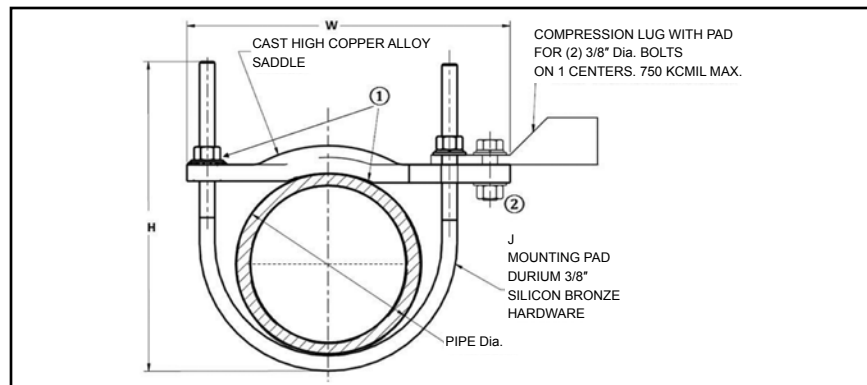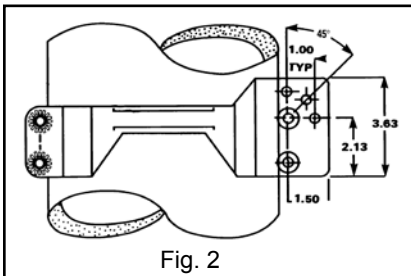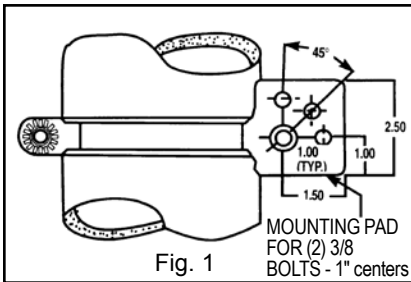

Catalog Number	Figure #	Accommodates		H	J	W	Recommended Torque
		I.P.S. **	O.D. Size				
<b>GAR3902TC</b>	1	1/2-1	0.84 - 1.32	3.50	3/8	3.75	240
<b>GAR3903TC</b>	1	1 1/4-2	1.66 - 2.38	4.00	3/8	4.75	240
<b>GAR3904TC</b>	1	2 1/2-3 1/2	2.88 - 4.00	6.50	3/8	6.50	240
<b>GAR3905TC</b>	1	4-5	4.50 - 5.56	7.50	3/8	8.00	240
<b>GAR3906TC</b>	1	6	6.62	8.50	3/8	9.12	240
<b>GAR3907TC</b>	2	8	8.62	10.00	3/8	11.25	240
<b>GAR3908TC</b>	2	10	10.75	12.00	3/8	13.25	240
<b>GAR3909TC</b>	2	12	12.75	14.00	3/8	15.25	240

**NOTES:**

\*\* Refer to Section O for tube dimensions.

① Add suffix "-TNET" for electro-tin plated connector and electro-tin plated

DURIMUM™ silicon bronze hardware. Tin plated catalog number includes mounting hardware for second bolt hole.

**② OPTIONAL MOUNTING HARDWARE**

TMH-289 includes (1) 38X125HEB bolt, (1) 38CHEN nut, (1) 38SW split washer and (2) 38FW flat washers, ordered separately.

Clean pipe surface beneath saddle until virgin metal is exposed, install GAR-TC ground connector and for maximum conductivity, apply PENETROX™ E oxide inhibiting compound around perimeter of saddle.


E-37

**Blue highlighted items are industry standard and most frequently ordered.**

## TYPE GD

### Cable to Rod/Tube Ground Connector

For Two Copper Cables  
to Rod or Tube

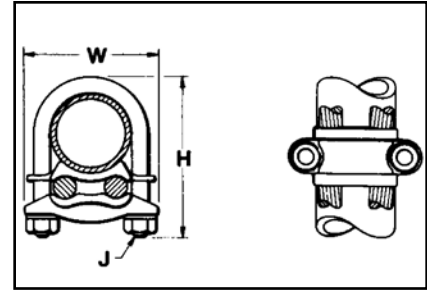

High copper alloy ground connector for joining a range of two parallel cables to rod or pipe. Especially good for grounding fence posts. High copper alloy cast body with DURIMUM™ U-bolts,

nuts, and lockwashers make the GD suitable for burial in ground or concrete. One-wrench installation. UL467 Listed. Acceptable for direct burial in earth or concrete.



E-38

Catalog Number	Conductor			H	J	W
	Tube I.P.S. **	Rod Size or O.D. Range	Cable			
GD1526	1	1-1/8 - 1-1/4	4 Sol. - 2/0 Str.	3-3/8	3/8	2-5/8
GD1529	1	1-1/8 - 1-1/4	2/0 Sol. - 250	3-3/8	3/8	2-5/8
GD1626	1-1/4	1-3/8 - 1-1/2	4 Sol. - 2/0 Str.	3-1/2	3/8	3
GD1629	1-1/4	1-3/8 - 1-1/2	2/0 Sol. - 250	3-1/2	3/8	3-1/4
GD174C	1-1/2	1-5/8 - 1-7/8	8 Sol. - 4 Str.	4	3/8	3-1/4
GD1726	1-1/2	1-5/8 - 1-7/8	4 Sol. - 2/0 Str.	4	3/8	3-1/4
GD1729	1-1/2	1-5/8 - 1-7/8	2/0 Sol. - 250	4	3/8	3-1/4
GD1734	1-1/2	1-5/8 - 1-7/8	300 - 500	4-5/8	1/2	3-5/8
GD184C	2	2 - 2-3/8	8 Sol. - 4 Str.	4-3/8	3/8	3-3/4
GD1826	2	2 - 2-3/8	4 Sol. - 2/0 Str.	4-3/8	3/8	3-3/4
GD1829	2	2 - 2-3/8	2/0 Sol. - 250	4-3/8	3/8	3-3/4
GD1834	2	2 - 2-3/8	300 - 500	5-3/8	1/2	4-1/8
GD194C	2-1/2	2-1/2 - 2-7/8	8 Sol. - 4 Str.	5	3/8	4-1/4
GD1926	2-1/2	2-1/2 - 2-7/8	4 Sol. - 2/0 Str.	5	3/8	4-1/4
GD1929	2-1/2	2-1/2 - 2-7/8	2/0 Sol. - 250	5	3/8	4-1/4
GD1934	2-1/2	2-1/2 - 2-7/8	300 - 500	5	1/2	4-5/8
GD204C	3	3 - 3-1/2	8 Sol. - 4 Str.	5-5/8	3/8	4-7/8
GD2026	3	3 - 3-1/2	4 Sol. - 2/0 Str.	5-5/8	3/8	4-7/8
GD2029	3	3 - 3-1/2	2/0 Sol. - 250	5-5/8	3/8	4-7/8
GD2034	3	3 - 3-1/2	300 - 500	6-3/8	1/2	5-1/4
GD214C	3-1/2	3-1/2 - 4	8 Sol. - 4 Str.	6-1/4	3/8	5-3/8
GD2126	3-1/2	3-1/2 - 4	4 Sol. - 2/0 Str.	6-1/4	3/8	5-3/8
GD2129	3-1/2	3-1/2 - 4	2/0 Sol. - 250	6-1/4	3/8	5-3/8
GD2134	3-1/2	3-1/2 - 4	300 - 500	6-7/8	1/2	5-3/4
GD224C	4	4 - 4-1/2	8 Sol. - 4 Str.	6-3/8	3/8	5-7/8
GD2226	4	4 - 4-1/2	4 Sol. - 2/0 Str.	6-3/8	3/8	5-7/8
GD2229	4	4 - 4-1/2	2/0 Sol. - 250	6-3/8	3/8	5-7/8
GD2234	4	4 - 4-1/2	300 - 500	6-7/8	1/2	6-1/4

**NOTE:**

\*\* Refer to Section O for tube dimensions.  
Complies with NFPA 78-86 HEAVY DUTY stacks; use suffix "-LD"  
for lead plating for HEAVY DUTY stack applications



**Blue highlighted items are industry standard and most frequently ordered.**

**TYPE GP**

**Ground Connector**

For Two Copper Cables to Rod or Pipe

High copper alloy ground connector for joining a range of parallel cables perpendicular to rod, pipe or column. Also used with one groove for run, the other for tap to equipment. High copper alloy cast body and DURIMUM™ U-bolts, nuts, and lockwashers make the GP suitable for direct burial in the ground or concrete. One-wrench installation. UL467 Listed. Acceptable for direct burial in earth or concrete.

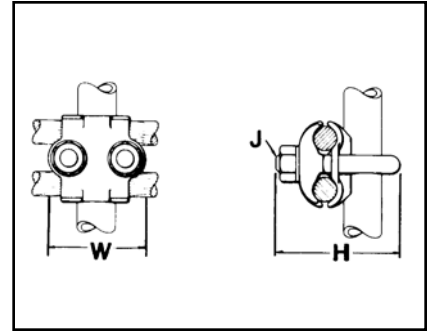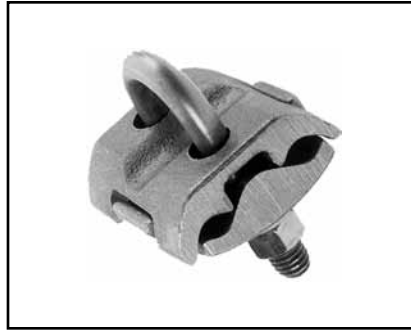

E-39

Catalog Number	Conductor			H	J	W
	Tube I.P.S. **	O.D. Size	Cable			
GP114C	1/4	1/2	8 Sol. - 4 Str.	2-1/2	3/8	1-7/8
GP1126	1/4	1/2	4 Sol. - 2/0 Str.	2-1/2	3/8	1-7/8
GP1129	1/4	1/2	2/0 Sol. - 250	2-1/2	3/8	1-7/8
GP644C	3/8	5/8 - 3/4	8 Sol. - 4 Str.	2-1/2	3/8	2-1/8
GP6426	3/8	5/8 - 3/4	4 Sol. - 2/0 Str.	2-1/2	3/8	2-1/8
GP6429	3/8	5/8 - 3/4	2/0 Sol. - 250	2-7/8	3/8	2-1/8
GP6434	3/8	5/8 - 3/4	300 - 500	3-1/2	1/2	2-5/9
GP144C	1/2-3/4	7/8 - 1	8 Sol. - 4 Str.	2-3/4	3/8	2-3/8
GP1426	1/2-3/4	7/8 - 1	4 Sol. - 2/0 Str.	3	3/8	2-3/8
GP1429	1/2-3/4	7/8 - 1	3/0 Sol. - 250	3	3/8	2-3/8
GP1434	1/2-3/4	7/8 - 1	300 - 500	3-3/4	1/2	2-5/9
GP164C	1-1/4	1-5/8	8 Sol. - 4 Str.	3-1/2	3/8	3
GP1629	1-1/4	1-5/8	2/0 Sol. - 250	3-1/2	3/8	3
GP1726	1-1/2	1-7/8	4 Sol. - 2/0 Str.	4	3/8	3-1/4
GP184C	2	2-3/8	8 Sol. - 4 Str.	4-1/8	3/8	3-11/16
GP1826	2	2-3/8	4 Sol. - 2/0 Str.	4-3/8	3/8	3-11/16
GP2026	3	3-1/2	4 Sol. - 2/0 Str.	5-1/2	3/8	4-13/16
GP2226	4	4-1/2	4 Sol. - 2/0 Str.	6-3/8	3/8	5-13/16

NOTE:

\*\* Refer to Section O for tube dimensions.



Blue highlighted items are industry standard and most frequently ordered.

## TYPE GK

### Ground Connector

For Three Copper Cables  
to Rod or Pipe

High copper alloy ground connector for joining three equal cables to rod or tube. Cable grooves take a wide range of cable. High copper alloy cast body and DURIMUM™ U-bolts, nuts, and lockwashers make the GK suitable for direct burial in soil or concrete. One-wrench installation. UL467 Listed. Acceptable for direct burial in earth or concrete.

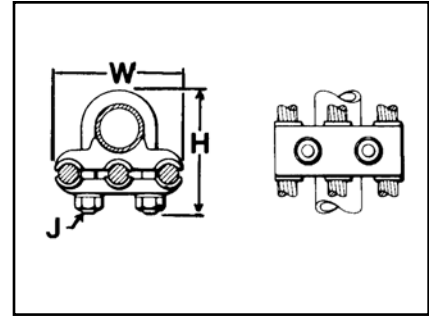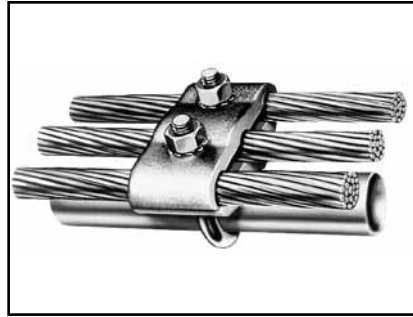

E-40



Catalog Number	Conductor			H	J	W
	Tube I.P.S. **	O.D. Size	Cable			
GK114C	1/4	1/2	8 Sol. - 4 Str.	2-1/2	3/8	2-1/2
GK1126	1/4	1/2	4 Sol. - 2/0 Str.	2-1/2	3/8	2-3/4
GK1129	1/4	1/2	2/0 Sol. - 250	2-1/2	1/2	3-3/8
GK644C	3/8	5/8 - 3/4	8 Sol. - 4 Str.	2-7/8	3/8	2-5/8
GK6426	3/8	5/8 - 3/4	4 Sol. - 2/0 Str.	2-7/8	3/8	3
GK6429	3/8	5/8 - 3/4	2/0 Sol. - 250	2-7/8	1/2	3-1/2
GK6434	3/8	5/8 - 3/4	300 - 500	3-1/2	1/2	4
GK1426	1/2 - 3/4	7/8 - 1	4 Sol. - 2/0 Str.	2-3/4	3/8	3-1/4
GK1429	1/2 - 3/4	7/8 - 1	2/0 Sol. - 250	3-3/4	1/2	3-7/8
GK1434	1/2 - 3/4	7/8 - 1	300 - 500	3-3/4	1/2	4-3/8
GK1526	1	1-1/8 - 1-1/4	4 Sol. - 2/0 Str.	3-3/8	3/8	3-1/2
GK1529	1	1-1/8 - 1-1/4	2/0 Sol. - 250	3-3/4	1/2	4-1/8
GK1626	1-1/4	1-3/8 - 1-1/2	4 Sol. - 2/0 Str.	3-1/2	3/8	3-7/8
GK1629	1-1/4	1-3/8 - 1-1/2	2/0 Sol. - 250	4-1/4	1/2	4-1/2
GK1726	1-1/2	1-5/8 - 1-7/8	4 Sol. - 2/0 Str.	4	3/8	4-1/8
GK1729	1-1/2	1-5/8 - 1-7/8	2/0 Sol. - 250	4-5/8	1/2	4-3/4
GK1826	2	2 - 2-3/8	4 Sol. - 2/0 Str.	4-1/4	3/8	4-5/8
GK1829	2	2 - 2-3/8	2/0 Sol. - 250	4-3/8	1/2	5-1/8
GK1926	2-1/2	2-1/2 - 2-7/8	4 Sol. - 2/0 Str.	5	3/8	5-1/8
GK1929	2-1/2	2-1/2 - 2-7/8	2/0 Sol. - 250	5	1/2	5-5/8

NOTE:

\*\* Refer pages to Section-O for tube dimensions.

Blue highlighted items are industry standard and most frequently ordered.





**TYPE BDT**

**BONDIT® INTERSYSTEM  
BONDING CONNECTOR**

House Mounted or  
Meter Socket Mounted

Designed to meet the requirements of NEC Article 250.94 "Bonding for Other Systems". Corrosion-resistant stainless steel set screws. Accepts main ground wire (#2-#8) and up to 4 intersystem wires (#6-#14). Same design can be mounted directly to the meter socket or mounted to the house. Innovative design does not damage meter socket and will not void warranty.

Catalog Number: **BDT1**

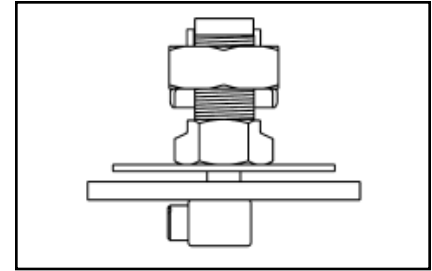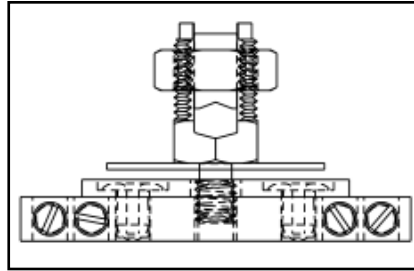


**Features & Benefits**

- Made in the USA!
- Meets Intersystem Bonding Requirements; NEC 250.94
- One connector does it all
- House mount or meter socket mount
- Incorporates proven BURNDY® SERVIT POST™ design
- Stainless steel set screws
- Accepts main ground wire (#2-#8), up to 4 intersystem wires (#6-#14)



- Easily mounts to meter box during new installation or can be wall mounted
- Easy to follow instructions included
- Does not damage meter socket; no worries about damaging the paint or voiding warranties
- Easily installed with a wrench and screwdriver
- Open design prevents buildup of hornets, bees, spiders

E-41

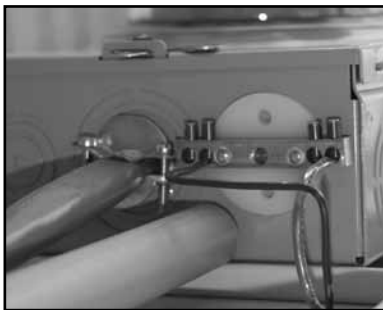


**CONFIGURATION 1 - MOUNTED TO ENCLOSURE**

1. Punch out a 1/2" or 3/4" knock out on the electrical enclosure.
2. Begin assembly by installing the ground electrode conductor in the SERVIT POST™ inside the electrical enclosure. Torque on SERVIT® NUT: 275 in-lb max.
3. Install the rest of the connector shown below, it is not necessary for the bus bar to be aligned parallel with the enclosure. (Note: the split washer is not used in this configuration.)
4. Tighten the intersystem ground wires with set screws in the bus bar to a maximum torque of 35 in-lb.
5. Adhere the BONDIT® location sticker to the front of the electrical enclosure.

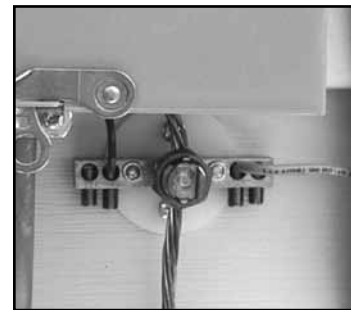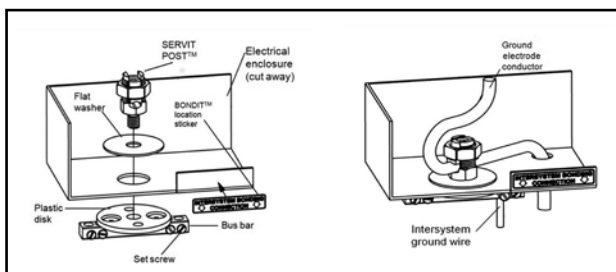

**CONFIGURATION 2 - MOUNTED TO EXTERIOR WALL**

1. Begin by assembling the connector as shown in figure below. Be sure SERVIT POST™ is as tight as it can be while its groove is aligned with the ground electrode conductor. (Note: the flat washer is not used in this configuration.)
2. Use two mounting screws (not included) to secure the connector to the exterior wall so that the set screws in the bus bar face downward.
3. Install the ground electrode conductor into the SERVIT POST™ while turning the nut/pressure bar assembly to a maximum torque of 275 in-lb (use 2 wrenches if necessary).
4. Tighten the intersystem ground wires with the set screws in the bus bar to a maximum torque of 35 in-lb.
5. If hidden from view, use the BONDIT® location sticker to indicate the location.

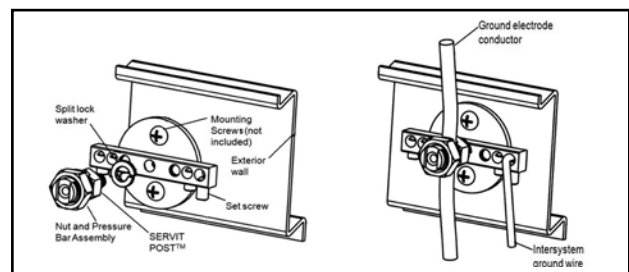

Blue highlighted items are industry standard and most frequently ordered.



## BONDIT® - Wall Mounted

### Intersystem Bonding Connector

NEC 250.94 refers to a requirement in the 2008 National Electrical Code. In the past, ground wires from telephone systems or cable systems were allowed to be grounded separately from the GEC (Ground Electrode Conductor from the main electrical service). With the new code, all ground wires from separate systems such as telephone systems, CATV and radio systems must be tied together at one location to the GEC. Hence, the term intersystem refers to tying all of the "system" grounds together in one location. The BONDIT®-Wall Mount is a great solution when the GEC is exposed (not in conduit).

With the new BONDIT® - Wall Mount connector BURNDY provides an economical solution that meets the needs of NEC 250.94.

Catalog Number: **BDTIBB**

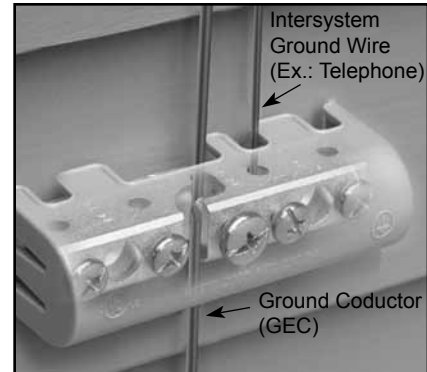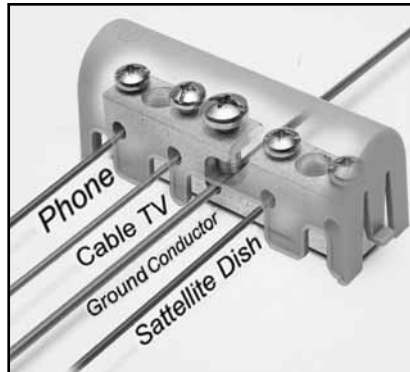


### Features & Benefits

- Meets the Intersystem Bonding requirements of NEC2008 250.94
- Provides an easy to access grounding point for utilities such as telecom and cable
- Easy to install
- UL Listed and CSA Certified
- Tin-plated connector body provides long-lasting corrosion resistance
- Stainless steel set screws
- Accepts main ground wire (#2 to #6), up to (4) intersystem wires (#4 to #14)



- Supplied with durable cover, easily secured over connector body
- Approved for use with solid or stranded conductors

Catalog Number	Conductor Range		Reference Dimensions			
	Lay-In Section	Conductor Ports	L	W	H	M
BDTIBB	#6 - #2 AWG	#14 - #4 AWG	3.99 [101]	0.71 [18]	0.91 [23]	2.46 [62]

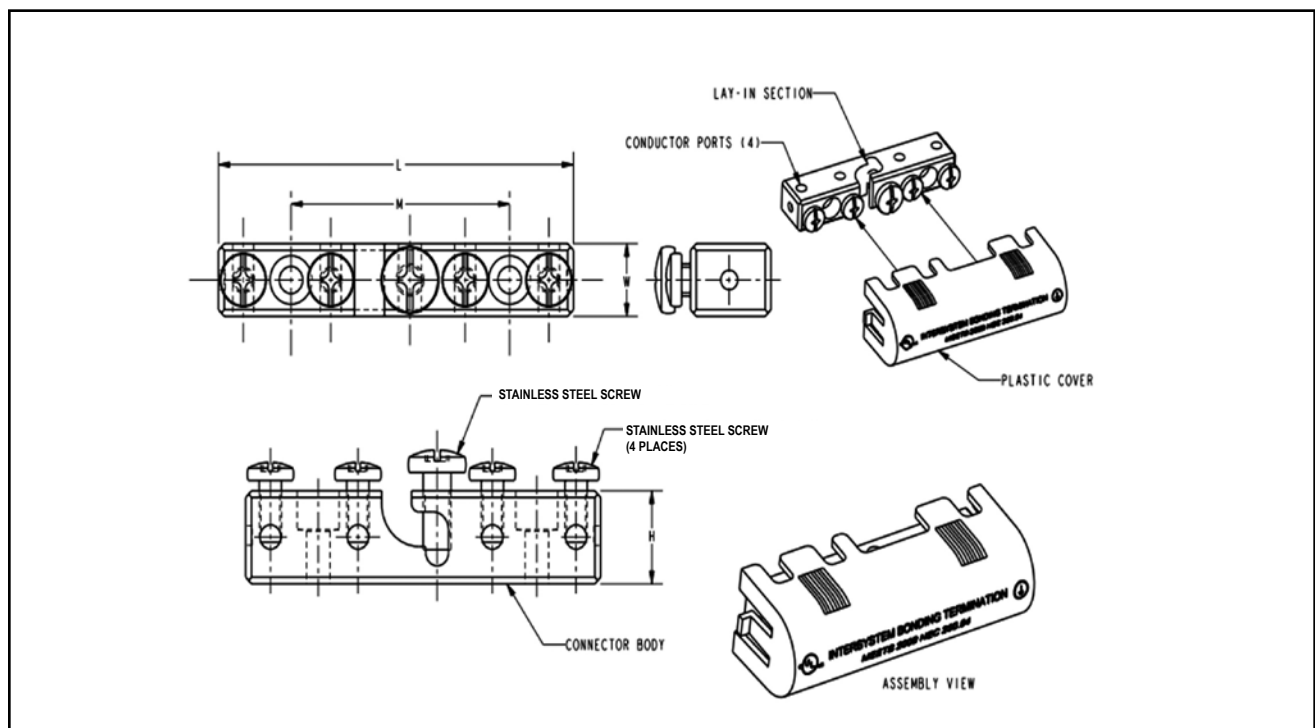

Blue highlighted items are industry standard and most frequently ordered.

**CAST BRONZE CLAMPS FOR CONDUIT**

Pressure bar type conduit hub adjusts for 1/2", 3/4" EMT or 1/2" rigid conduit. Hub swings 360° for easy alignment. Zinc plated hardware.



Catalog Number	Accommodates Conductor Range			Reference Dimensions			Recommended Screw Torque (Inch Pounds)	
	Water Pipe	Ground	Hub Size	H	L	W	Pipe Clamp	Wire Clamp
<b>C-11JPT</b>	1/2 - 1 [13 - 25]	10 - 6 Sol.	1/2 [13]	2.07 in [53]	3.19 [81]	2.70 in [69]	50 in.-lb.	50 in.-lb.
<b>C-22JPT</b>	1-1/4 - 2 [32 - 51]	10 - 6 Sol.	1/2 [13]	2.70 in [69]	3.83 [97]	2.70 in [69]	50 in.-lb.	50 in.-lb.
<b>C-4JPT</b>	2-1/2 - 4 [64 - 102]	10 - 6 Sol.	1/2 [13]	4.39 in [112]	5.15 [131]	2.70 in [69]	50 in.-lb.	50 in.-lb.

E-43

**CAST BRONZE GROUND CLAMPS**

For connecting grounding conductor to water pipe or copper tube. "D" indicates UL467 Listed for direct burial in earth and concrete and are supplied with silicon bronze hardware. "B" indicates brass hardware.



Catalog Number	Accommodates Conductor Range			Reference Dimensions				Recommended Screw Torque (Inch Pounds)	
	Water Pipe	Rebar	Ground	H	L	W	C	Pipe Clamp	Wire Clamp
<b>C-11N</b>	1/2 - 1 [13 - 25]	—	10 - 2 Str.	1.81 in [46]	2.25 [56]	0.63 in [16]	0.63 in [16]	50 in.-lb.	50 in.-lb.
<b>C-11D</b>	1/2 - 1 [13 - 25]	#4 - #8	10 - 2 Str.	1.81 in [46]	2.25 [56]	0.63 in [16]	0.63 in [16]	50 in.-lb.	50 in.-lb.
<b>C-11B</b>	1/2 - 1 [13 - 25]	—	10 - 2 Str.	1.81 in [46]	2.25 [56]	0.63 in [16]	0.63 in [16]	50 in.-lb.	50 in.-lb.
<b>C-22*</b>	1-1/4 - 2 [32 - 51]	—	10 - 2 Str.	2.38 in [60]	3.63 [92]	0.75 in [0.19]	1.00 in [25]	50 in.-lb.	50 in.-lb.
<b>C-22D</b>	1-1/4 - 2 [32 - 51]	—	10 - 2 Str.	2.38 in [60]	3.63 [92]	0.75 in [0.19]	1.00 in [25]	50 in.-lb.	50 in.-lb.
<b>C-4*</b>	2-1/2 - 4 [46 - 114]	—	10 - 2 Str.	4.13 in [105]	6.25 [159]	0.96 in [24]	1.88 in [48]	50 in.-lb.	50 in.-lb.
<b>C-8*</b>	4-1/2 - 6 [114 - 165]	—	10 - 2 Str.	4.29 in [109]	8.34 [212]	1.25 in [32]	1.88 in [48]	50 in.-lb.	50 in.-lb.

\* Supplied with zinc-plated steel hardware.

**BUDGET PRICE CAST BRONZE GROUND CLAMP**

C5 similar to C11, but lighter duty.



Catalog Number	Accommodates Conductor Range		Reference Dimensions			Recommended Screw Torque (Inch Pounds)	
	Water Pipe	Ground	H	L	W	Pipe Clamp	Wire Clamp
<b>C-5</b>	1/2 - 1 [13 - 25]	10 - 2 Str.	1.56 in [40]	2.25 [56]	0.56 in [14]	50 in.-lb.	50 in.-lb.

Blue highlighted items are industry standard and most frequently ordered.

## Cast Bronze Ground Clamps

With Lay-in Feature

For connecting grounding conductor to water pipe, copper tube, ground rod or rebar. The open face design allows for fast lay-in of the tap conductor without the need for cutting. Simply reverse bottom clamp for smaller size rebar or rod. Connectors are provided with Silicon Bronze hardware.



Fig.1



Fig.2

E-44



Catalog Number	Fig. #	Accommodates Conductor Range				Reference Dimensions			Recommended Screw Torque (Inch Pounds)
		Main			Tap	H	L	W	
		Water Pipe	Rebar	Ground Rod	Ground				
<b>C11K16D</b>	1	1/2" - 1" [13-25]	#4 - #6	3/8" - 1"	#10 - #2 Str.	1.64	2.28	0.66	50 in.-lbs.
<b>C11K17D</b>	2	1/2" - 1" [13-25]	#4 - #6	3/8" - 1"	#10 - #2 Str.	1.64	2.28	0.66	50 in.-lbs.

## DIE CAST CLAMPS

Die cast zinc with zinc plated screws.



Catalog Number	Accommodates Conductor Range		Reference Dimensions				Recommended Screw Torque (Inch Pounds)	
	Water Pipe	Ground	H	L	W	C	Pipe Clamp	Wire Clamp
<b>CZ-11</b>	1/2" - 1" [13-25]	10 - 2 Str.	1.56" [40]	2.25" [56]	0.56" [14]	0.50" [13]	50 in.-lb.	50 in.-lb.

Blue highlighted items are industry standard and most frequently ordered.

**CAST BRONZE CLAMPS**

To connect armored cable to water pipe. Zinc plated screws. Pressure bar grips armor or outer cable insulation. 360° swing hub for easy alignment.



E-45

Catalog Number	Accommodates Conductor Range		Reference Dimensions			Recommended Torque	
	Water Pipe	Armored Conductor	H	L	W	Pipe Clamp	Wire Clamp
<b>C-11JA</b>	1/2 - 1 [13-25]	10 - 6 Sol.	1.38" [35]	3.05" [77]	1.41" [36]	50 in.-lb.	50 in.-lb.
<b>C-22JA</b>	1-1/4 - 2 [32-51]	10 - 6 Sol.	2.60" [66]	3.69" [94]	1.41" [36]	50 in.-lb.	50 in.-lb.
<b>C-4JA</b>	2-1/2 - 4 [64-102]	10 - 6 Sol.	4.29" [109]	5.01" [128]	1.41" [36]	50 in.-lb.	50 in.-lb.

**CAST BRONZE GROUND CLAMPS**

For connecting grounding conductor, EMT or rigid conduit to water pipe, copper tube, ground rod or rebar. Hub swings 360° for easy alignment. Simply reverse bottom clamp for smaller size rebar or rod. Connectors are provided with Silicon Bronze hardware.




Catalog Number	Accommodates Conductor Range			Tap	Reference Dimensions			Recommended Screw Torque (Inch Pounds)
	Main		Ground Rod		Ground	H	L	
	Water Pipe	Rebar		Ground				
<b>C11HD4/0DB</b>	1/2" - 1" [13-25]	#4 - #6	3/8" - 1"	#8 - 4/0 AWG	2.25	2.65	1.56	50 in.-lbs.
<b>C22HD4/0DB</b>	1-1/4" - 2" [32-51]	—	—	#8 - 4/0 AWG	2.70	3.60	1.56	50 in.-lbs.

Blue highlighted items are industry standard and most frequently ordered.

## CAST BRONZE CLAMPS

### GROUND CLAMP

For connecting armored cable to water pipe. Zinc plated screws. "D" indicates UL467 for direct burial in earth and concrete, supplied with silicon bronze hardware.

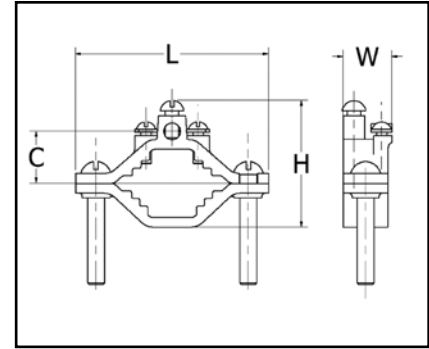

E-46

Catalog Number	Accommodates Conductor Range			Reference Dimensions				Recommended Screw Torque (Inch Pounds)	
	Water Pipe	Ground	Ground Clamp	H	L	W	C	Pipe Clamp	Wire Clamp
C-6	1/2 - 1 [13-25]	10 - 2 Str.	Bare Armored Unarmored Wire Cables or Cords	1.60" [41]	2.34" [59]	1.06" [27]	0.63" [16]	50 in.-lb.	50 in.-lb.
C-6D	1/2 - 1 [13-25]	10 - 2 Str.		1.60" [41]	2.34" [59]	1.06" [27]	0.63" [16]	50 in.-lb.	50 in.-lb.
C-7	1-1/4 - 2 [32-51]	10 - 2 Str.		2.38" [60]	3.62" [92]	0.94" [24]	1.00" [25]	50 in.-lb.	50 in.-lb.

### CAST BRONZE CLAMP FOR RIGID CONDUIT

For grounding rigid conduit systems. Zinc plated screws.





Catalog Number	Accommodates Conductor Range			Reference Dimensions				Recommended Screw Torque (Inch Pounds)	
	Water Pipe	Ground	Hub Size	H	L	W	C	Pipe Clamp	Wire Clamp
C-61	1/2 - 1 [13-25]	#6 Sol. Max.	1/2 [13]	2.07" [53]	2.34" [59]	1.34" [34]	1.06" [27]	50 in.-lb.	50 in.-lb.
C-66	1-1/4 - 2 [32-51]	#6 Sol. Max.	1/2 [13]	2.69" [68]	3.62" [92]	1.34" [34]	1.40" [36]	50 in.-lb.	50 in.-lb.

Blue highlighted items are industry standard and most frequently ordered.

**CAST BRONZE CLAMPS FOR CONDUIT**

For grounding rigid conduit systems. Continuity from rigid conduit systems to ground provided by cast bronze threaded conduit hub. Zinc plated screws.

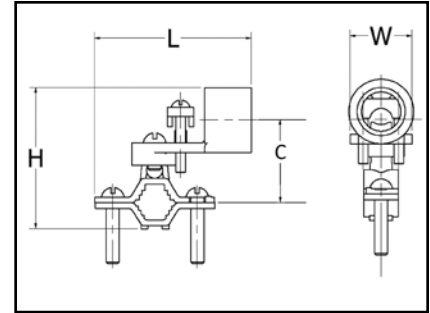
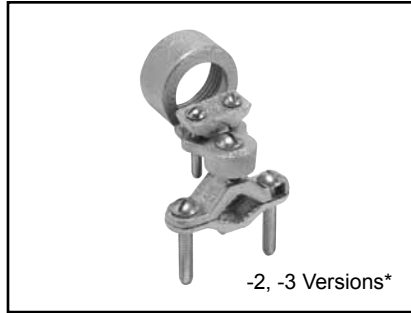


Catalog Number	Accommodates Conductor Range			Reference Dimensions				Recommended Screw Torque (Inch Pounds)	
	Water Pipe	Ground	Hub Size	H	L	W	C	Pipe Clamp	Wire Clamp
C-11LH-1	1/2 - 1 [13-25]	10 Str. - 6 Sol.	1/2 [13]	2.25" [57]	3.23" [83]	0.69" [18]	0.97" [25]	50 in.-lb.	50 in.-lb.
C-22LH-1	1-1/4 - 2 [32-51]	10 Str. - 6 Sol.	1/2 [13]	2.88" [73]	3.50" [89]	0.69" [18]	1.34" [34]	50 in.-lb.	50 in.-lb.
C-4LH-1	2-1/2 - 4 [54-102]	10 Str. - 6 Sol.	1/2 [13]	4.56" [116]	4.82" [122]	0.69" [18]	2.44" [62]	50 in.-lb.	50 in.-lb.
C-11LH-2	1/2 - 1 [13-25]	2/0 - 10 Str.	3/4 [19]	2.56" [65]	2.86" [73]	1.00" [25]	1.13" [29]	50 in.-lb.	50 in.-lb.
C-22LH-2	1-1/4 - 2 [32-51]	2/0 - 10 Str.	3/4 [19]	3.19" [65]	3.50" [89]	1.00" [25]	1.50" [38]	50 in.-lb.	50 in.-lb.
C-4LH-2	2-1/2 - 4 [64-102]	2/0 - 10 Str.	3/4 [19]	4.88" [124]	4.82" [122]	1.00" [25]	2.38" [60]	50 in.-lb.	50 in.-lb.
C-11LH-3	1/2 - 1 [13-25]	3/0 - 10 Str.	1 [25]	2.69" [68]	2.86" [73]	1.13" [29]	1.19" [30]	50 in.-lb.	50 in.-lb.
C-22LH-3	1-1/4 - 2 [32-51]	3/0 - 10 Str.	1 [25]	3.32" [59]	3.50" [89]	1.13" [29]	1.56" [40]	50 in.-lb.	50 in.-lb.
C-4LH-3	2-1/2 - 4 [64-102]	3/0 - 10 Str.	1 [25]	5.01" [127]	4.82" [122]	1.13" [29]	2.44" [62]	50 in.-lb.	50 in.-lb.

\* C-LH with -1 has one screw; -2 and -3 Versions have 2 screws as shown.

**CAST BRONZE CLAMP WITH COPPER STRAP**

For grounding rigid conduit systems. Strap helps protect conduit system from water system vibrations. Zinc plated screws. Strap ETP copper.

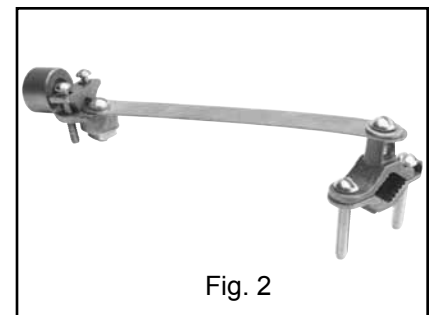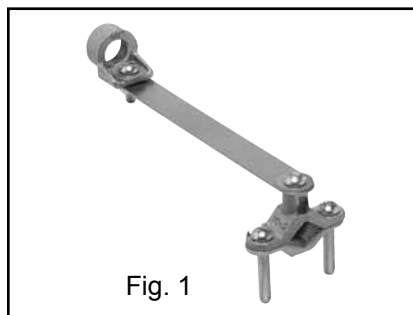

Catalog Number	Fig. #	Accommodates Conductor Range			Reference Dimensions					Recommended Screw Torque (Inch Pounds)	
		Water Pipe	Ground	Hub Size	H	L	W	C	D	Pipe Clamp	Wire Clamp
C-11CSH-1	1	1/2 - 1 [13-25]	6 Sol. Max.	1/2 [13]	1.75" [44]	8.50" [216]	1.06" [27]	1.06" [27]	6.12" [155]	50 in.-lb.	50 in.-lb.
C-11CSH-2	1	1/2 - 1 [13-25]	4/0 Str. Max.	3/4 [19]	1.75" [44]	8.50" [216]	1.25" [32]	1.50" [38]	6.12" [155]	50 in.-lb.	50 in.-lb.
C-11CSH-3	1	1/2 - 1 [13-25]	4/0 Str. Max.	1 [25]	1.75" [44]	8.50" [216]	1.50" [38]	1.75" [44]	6.12" [155]	50 in.-lb.	50 in.-lb.
C11CSLH12	2	1/2 - 1 [13-25]	2/0 Str. Max.	1/2 [13]	1.75" [44]	8.50" [216]	1.18" [30]	1.06" [27]	6.12" [155]	50 in.-lb.	45 in.-lb.



Blue highlighted items are industry standard and most frequently ordered.

## TYPE GC-A

### Dual Rated Ground Clamp


For Copper and  
Aluminum Cable

GC-A ground clamps are UL Listed for use with either copper or aluminum conductors to copper water pipe, galvanized pipe or steel conduit. All clamps are constructed from tin plated high-strength extruded aluminum alloy. PENETROX™ oxide inhibiting joint compounds are recommended for all aluminum applications.

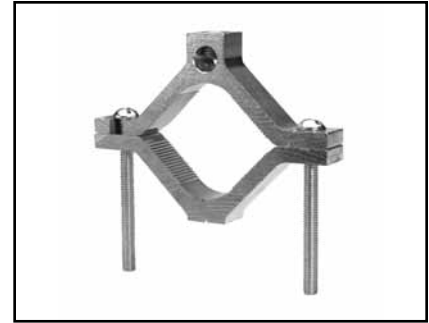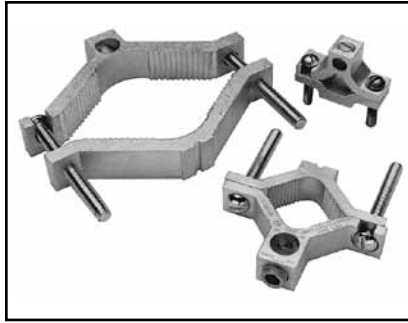

### Features & Benefits

- Clamps are dual rated for both copper and aluminum conductors
  - ◊ Maximum flexibility of application
- All connectors are tin plated
  - ◊ Provide low contact resistance and prevents galvanic corrosion
- All clamps are range taking
  - ◊ Only 3 catalog numbers covers complete range of applications from 1/2 - 4 inches

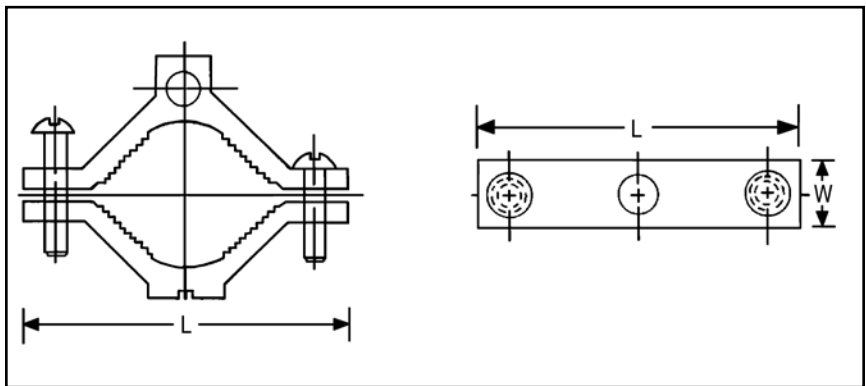

Catalog Number	Conduit, Pipe, or Water Tube Size**	Wire Range	Screw Type	W	L	Hex Size
<b>GC15A</b>	1/2 - 3/4 - 1	1/0 - 14	Slotted	11/16	2-1/4	Slot
<b>GC18A</b>	1-1/4 - 1-1/2 - 2	250 kcmil - 6	Hex Socket	13/16	3-3/4	5/16
<b>GC22A</b>	2-1/2 - 3 - 3-1/2 - 4	250 kcmil - 6	Hex Socket	1	6-5/16	5/16

NOTE:

\*\* Refer to Section O for tube dimensions.

Blue highlighted items are industry standard and most frequently ordered.




**TYPE GG**

**GROUND CONNECTOR**

For Copper Bar, Strap, Braid or Cable to Rod or Tube

High copper alloy ground connector for joining bar, strap, braid or cable to rod or tube. High copper alloy cast body, DURIMUM™ U-bolts, nuts and lockwashers make the GG particularly effective for use with braid for ground rods, switch handles, fence posts and gates. One-wrench installation.

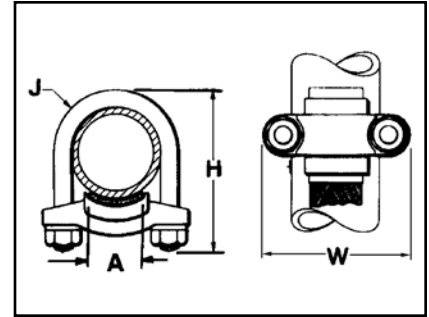

E-49

Catalog Number	Conductor		A	H	J	W
	Tube I.P.S. **	Rod				
GG15-1	1	1-1/8 - 1-1/4	1	3-3/8	3/8	2-5/8
GG16-1	1-1/4	1-3/8 - 1-1/2		3		
GG17-1	1-1/2	1-5/8 - 1-7/8		3-1/2		3-1/4
GG17-15			1-1/2	3-3/4		
GG18-1	2	2 - 2-3/8	1	4-1/4	1/2	3-3/4
GG18-15			1-1/2	4-1/8		
GG18-2			2	4-3/8		
GG19-2	2-1/2	2-1/2 - 2-7/8	2-1/2	5	1/2	4-5/8
GG19-25						2
GG20-2	3	3 - 3-1/2	2	6-3/8	1/2	5-1/4
GG20-25			2-1/2			5-3/4
GG20-3			3			6-1/4
GG21-2	3-1/2	3-1/2 - 4	2	5-7/8	1/2	5-3/4
GG21-25			2-1/2			
GG21-3			3			
GG21-35			3-1/2			
GG22-2	4	4 - 4-1/2	2	6-1/2	1/2	6-1/4
GG22-25			2-1/2			
GG22-3			3			
GG22-4			4			
GG24-2	5	—	2	7-5/8	1/2	7-1/4

NOTE:

\*\* Refer to Section O for tube dimensions.


Blue highlighted items are industry standard and most frequently ordered.

## TYPE GQ

### Ground Connector

For Copper Cable to Tube

High copper alloy ground connector for cross connecting a wide range of cable. High copper alloy, cast body, DURIMUM™ U-bolts, nuts, and lockwashers make the GQ suitable for burial in soil or concrete. One-wrench installation. UL467 Listed. Acceptable for direct burial in earth or concrete.

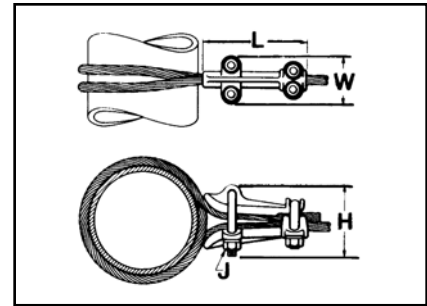

E-50


Catalog Number	Conductor		H	J	L	W
	I.P.S.	Cable				
<b>GQ2626</b>	6" Max.	4 Str. - 2/0 Str.	4-1/2	1/2	5	2-1/2
<b>GQ26-1</b>	Above 6"	4 Str. - 2/0 Str.	7-1/8	1/2	5	2-1/2
<b>GQ2929</b>	6" Max.	2/0 Str. - 250	4-1/8	1/2	6	2-3/4
<b>GQ29-1</b>	Above 6"	2/0 Str. - 250	7-1/2	1/2	6	2-3/4

## TYPE GX

### Ground Connector

For Copper Cables

High copper alloy ground connector for cross connecting a wide range of cable. The high copper alloy cast body, DURIMUM™ U-bolts, nuts, and lockwashers make the GX suitable for burial in soil or concrete. One-wrench installation. UL467 Listed. Acceptable for direct burial in earth or concrete.

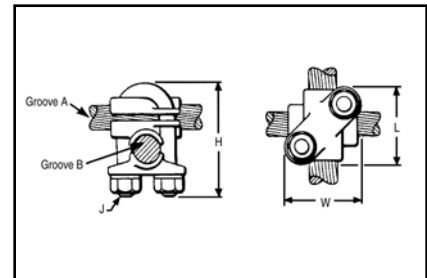

Catalog Number	Conductor		H	J	L	W
	Groove A	Groove B				
<b>GX4C4C</b>	8 Sol. - 4 Str.	8 Sol. - 4 Str.	1-7/8	3/8	1-5/8	1-5/8
<b>GX264C</b>	4 Sol. - 2/0 Str.	8 Sol. - 4 Str.	2-1/2	3/8	1-3/4	1-2/3
<b>GX2626</b>	4 Sol. - 2/0 Str.	4 Sol. - 2/0 Str.	2-1/2	3/8	1-3/4	1-2/3
<b>GX294C</b>	2/0 Sol. - 250	8 Sol. - 4 Str.	2-3/4	3/8	1-7/8	1-7/8
<b>GX2926</b>	2/0 Sol. - 250	4 Sol. - 2/0 Str.	2-1/2	3/8	1-7/8	1-7/8
<b>GX2929</b>	2/0 Sol. - 250	2/0 Sol. - 250	2-3/4	3/8	1-7/8	1-7/8
<b>GX344C</b>	300 - 500	8 Sol. - 4 Str.	2-3/4	3/8	2-1/8	1-7/8
<b>GX3426</b>	300 - 500	4 Sol. - 2/0 Str.	2-3/4	3/8	2-1/8	1-7/8
<b>GX3429</b>	300 - 500	2/0 Sol. - 250	2-3/4	3/8	2-1/8	1-7/8
<b>GX3434</b>	300 - 500	300 - 500	4-1/4	1/2	2-5/8	2-5/8


Blue highlighted items are industry standard and most frequently ordered.

**TYPE GRC**

**High Strength Ground Rod Clamp**

For Copper Cable to Rod

High copper alloy ground connector for joining a range of cable to copper clad, galvanized steel, and stainless steel ground rods. Slips over end of rod, one-wrench installation. UL467 Listed for direct burial in earth and concrete.

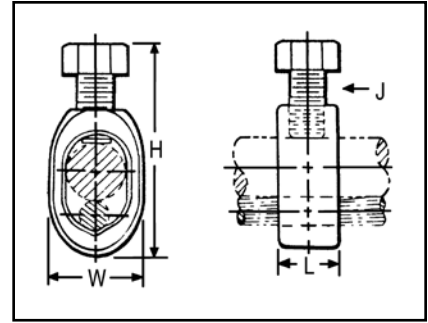

Catalog Number	Drive Rod	Conductor Range		H	W	L	J
		Min.	Max.				
<b>GRC12</b>	1/2	10 Sol.	2 Str.	2.00	0.89	0.63	3/8
<b>GRC58</b>	5/8	10 Sol.	1 Str.	2.19	0.95	0.63	3/8
<b>GRC34</b>	3/4	8 Sol.	1/0 Str.	2.47	1.09	0.65	3/8

E-51

**TYPE GCRT1/0 GROUND CONNECTORS**

**Ground Clamp Range Taking, up to 1/0**

The GCRT1/0 is a range taking ground rod clamp offering another choice from the BURNDY® family of connectors. The GCRT1/0 works on 1/2", 5/8" and 3/4" ground rods with a wire range of #8 through 1/0! The clamp is UL467 Listed for direct burial in earth and concrete. Catalog number **GCRT1/0**.



**Features & Benefits**

- Range taking design helps reduce inventory
- UL Listed and CSA Certified
- UL467 Listed for direct burial in earth and concrete



**TYPE GRL**

**Light Duty Economical Ground Rod Clamp**

UL 467 Listed. Acceptable for direct burial in earth and concrete.





Catalog Number	Rod Size	Conductor Range	
		Minimum	Maximum
<b>GRL3</b>	3/8 in	10 AWG	4 AWG
<b>GRL4</b>	1/2 in	10 AWG	2 AWG
<b>GRL5</b>	5/8 in	10 AWG	2 AWG
<b>GRL6</b>	3/4 in	10 AWG	2 AWG

Blue highlighted items are industry standard and most frequently ordered.

## FLEXIBLE COPPER BRAID JUMPER

Copper braid is made of tinned, pure copper wire woven and flattened into a rectangular shape for greater flexibility. Seamless, pure copper ferrules are formed and assembled on each end to provide appropriate contact surfaces.

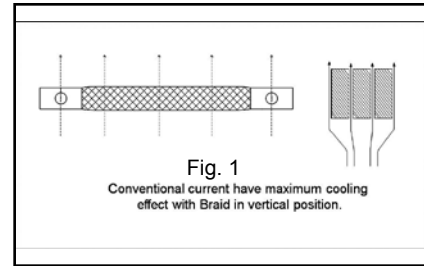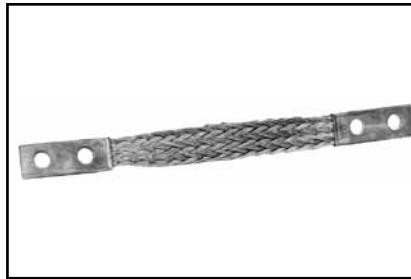


Braid is used extensively to compensate for expansion and contraction of moving parts and for thermal movement of rigid devices; to prevent breakage of insulators or bushings or equipment because of misalignment during settling of substation foundations; to absorb shock and vibration of operating equipment; and to provide flexible current carrying leads between moving parts of heavy machinery or equipment.

## BULK BRAID

Bulk braid can be ordered with a minimum order quantity of 10 feet. Specify feet in number of inches.

Example: 10 feet of 190 ampere braid is Catalog No. BB077L120.

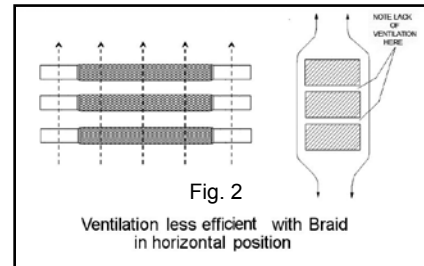


E-52

## CURRENT CARRYING CAPACITY

Flexible copper braid has generally better heat dissipation properties than flat bar, cable or other conductors, and therefore can be expected to have a greater current carrying capacity for given cross-sectional area. This is due to its greater surface area resulting from the woven construction of fine strands. However, ventilation, due to the vertical convection current of air, is appreciably better when the long axis of the braid is vertical rather than horizontal, so that the long sides of the braid, rather than the edges, are exposed to the moving air. This is particularly true when spaced braids are used in multiple as can be seen by comparing Figure 1 and 2.

INDOOR RATING AMPS	EQUIV CIRCULAR AREA	CAT NO.	APPROX WEIGHT PER FT
75	24,000	BB024L	0.06
95	48,000	BB048L	0.16
110	67,000	BB067L	0.22
190	77,184	BB077L	0.24
340	153,700	BB154L	0.49
360	231,552	BB226L	0.76
415	300,000	BB300L	1.06

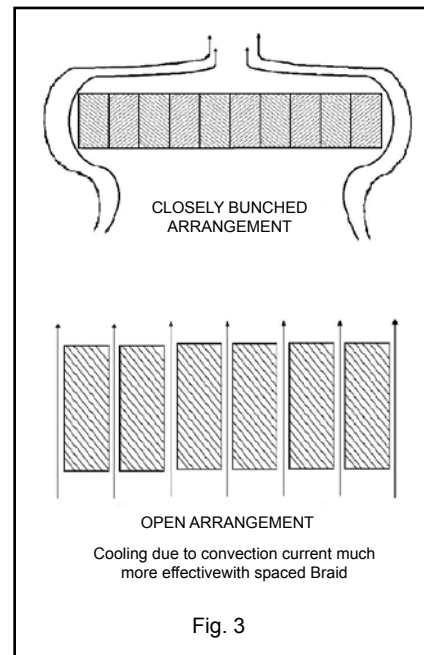

To take full advantage of ventilation, the cooling convection current of air should be permitted to flow freely between the braids. Therefore, if possible, the braids should be spaced apart, rather than bunched together, as illustrated in Figure 3. The effectiveness of spacing is, of course, greater when the braids are in a vertical position.



Blue highlighted items are industry standard and most frequently ordered.

**FLEXIBLE  
COPPER BRAID**

**CUSTOM DESIGNS**

Flexible copper braid offers an economical and efficient means of protecting electrical equipment from the potentially harmful effects of shock and vibration, terminal expansion, movement of components and misalignment that may occur during the service life of the equipment.

Many varieties of braid are required to meet those needs which we can build to your specifications.

We also offer engineering assistance in the selection of the most appropriate standard or custom braid configuration for your application.

**CUSTOM VARIATIONS**

**Drilling**

- \* Undrilled
- \* Elongated (slotted) holes
- \* Special hole patterns and location
- \* Metric
- \* NEMA

**Plating**

- \* Tin
- \* Silver
- \* Nickel
- \* Unplated

**Length**

- \* Jumper (overall)
- \* Ferrule(s) contact

**Insulated (covered)**

- \* Tubular
- \* Heat shrink

**Split Braid Assemblies**

- \* Stacked
- \* Side-by-side

**Multiple Ferrules**

**Preformed Configurations**

- \* Offset contact surfaces
- \* Angular (e.g. 90°, 180°) bends
- \* Ferrule contact surfaces rotated 90° on braid axis


**Combined Braid Assemblies**

**Combined connector - Braid Assemblies**

**Ferrule Variations**

- \* Belled/unbelled
- \* Width/thickness
- \* Contact length
- \* Special shaping
- \* Bent at angle°


**High Ampacity Requirements**

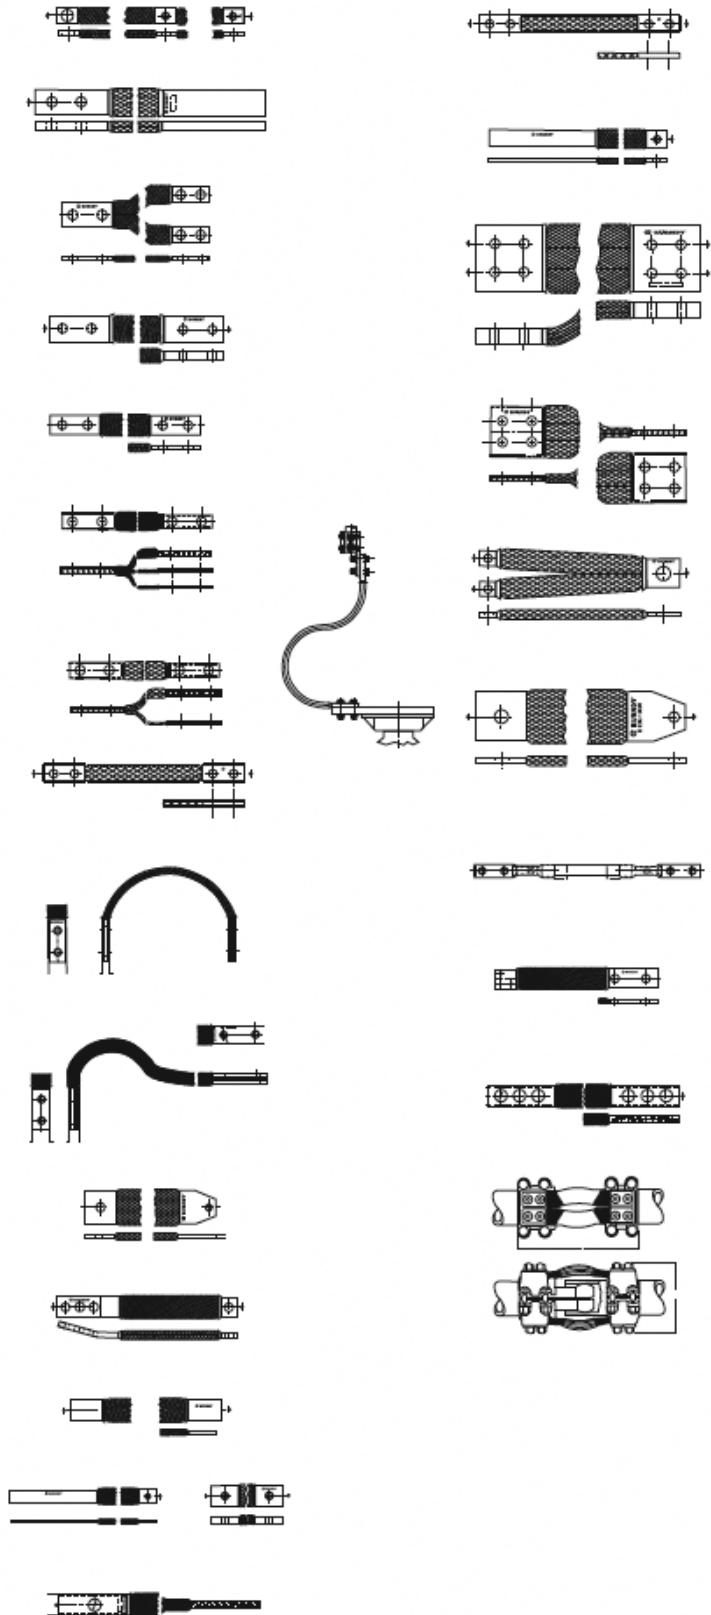

**Blue highlighted items are industry standard and most frequently ordered.**

## TYPE B

### Flexible Copper Braid Bonding Jumpers Bonding Straps

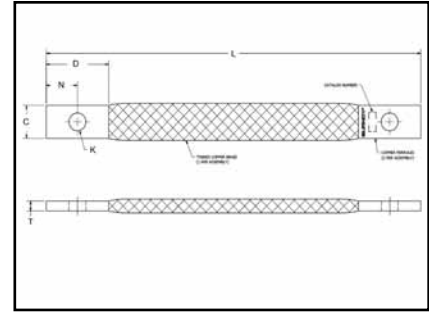

E-54

Flexible copper braid jumpers designed to take up linear expansion and contraction, compensate for misalignment and absorb vibratory movement of electrical equipment and devices. Made of flat extra flexible, tinned, pure copper braid, with unplated, seamless, pure copper ferrules formed into a rectangular shape on each end. Shown are standard 6 & 9 inch flexible copper braids; other lengths, plating and mounting hole sizes are available; contact BURNDY for more information.



Catalog Number	Number of Braids in Ferrules	AWG Equivalent	C	D	K**	L	N	T	Approximate Ampere Rating	
									Indoor	Outdoor
<b>BB024L6T14*</b>	1	#6	0.50	1	0.27	6	0.50	0.15	75	100
<b>BB024L9T14*</b>	1	#6	0.50	1	0.27	9	0.50	0.15	75	100
<b>BB048L6T14*</b>	1	#4	0.75	1	0.27	6	0.50	0.13	95	150
<b>BB048L9T14*</b>	1	#4	0.75	1	0.27	9	0.50	0.13	95	150
<b>BB067L6T14</b>	1	#2	0.83	1	0.27	6	0.50	0.17	110	180
<b>BB067L9T14</b>	1	#2	0.83	1	0.27	9	0.50	0.17	110	180
<b>BD6T14</b>	1	#1	0.94	1	0.27	6	0.50	0.13	190	225
<b>BD9T14</b>	1	#1	0.94	1	0.27	9	0.50	0.13	190	225

\* Not UL Listed or CSA Certified

\*\* K mounting hole .27" accommodates 1/4" hardware.

Blue highlighted items are industry standard and most frequently ordered.

TYPE B

Flexible Copper Braid

Flexible copper braid jumpers designed to take up linear expansion and contraction, compensate for misalignment and absorb vibratory movement of electrical equipment and devices.


Made of flat extra flexible, tinned, pure copper braid, with unplated, seamless, pure copper ferrules formed into a rectangular shape on each end.

Last two numbers in catalog number indicate total length of braid in inches (e.g., BD12N or BD12 is 12" long braid jumper).

Other lengths, plating and drilling are available. Contact the factory.



Catalog # Prefix	Equiv. AWG Size
BD	#1
BE	3/0
BF	4/0
BG	300 kcmil

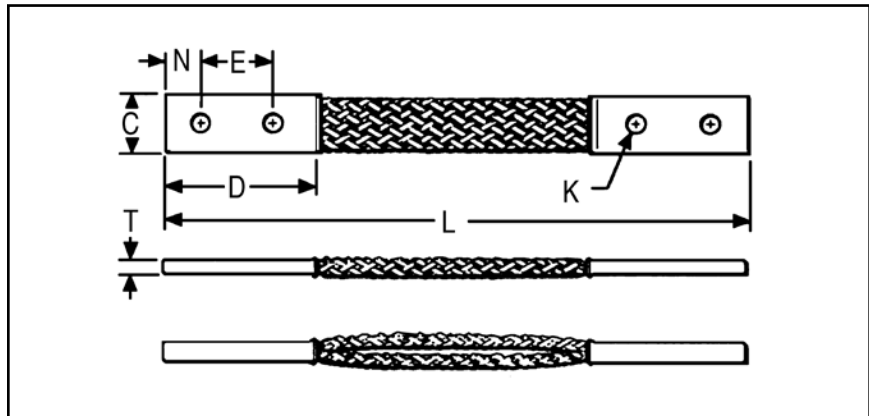

E-55

Catalog Number	Number of Braids in Ferrules	C	D	E	K	L	N	T	Approximate Ampere Rating	
									Indoor	Outdoor
<b>BD12</b> ②	1	0.94	2.50	1.25	0.44	12	0.62	0.13	190	225
<b>BD12N</b> ②	1	0.94	3.00	1.75	0.56	12	0.62	0.13	190	225
<b>BD18</b> ②	1	0.94	2.50	1.25	0.44	18	0.62	0.13	190	225
<b>BD18N</b> ②	1	0.94	3.00	1.75	0.56	18	0.62	0.13	190	225
<b>BD24</b> ②	1	0.94	2.50	1.25	0.44	24	0.62	0.13	190	225
<b>BD24N</b> ②	1	0.94	3.00	1.75	0.56	24	0.62	0.13	190	225
<b>BE12</b> ②	1	1.50	3.00	1.50	0.44	12	0.75	0.17	340	405
<b>BE12N</b> ②	1	1.50	3.00	1.75	0.56	12	0.62	0.17	340	405
<b>BE18</b> ②	1	1.50	3.00	1.50	0.44	18	0.75	0.17	340	405
<b>BE18N</b> ②	1	1.50	3.00	1.75	0.56	18	0.62	0.17	340	405
<b>BE24</b> ②	1	1.50	3.00	1.50	0.44	24	0.75	0.25	340	405
<b>BE24N</b> ②	1	1.50	3.00	1.75	0.56	24	0.62	0.17	340	405
<b>BF12</b> ②	1	1.19	3.00	1.50	0.44	12	0.75	0.25	360	430
<b>BF12N</b> ②	1	1.19	3.00	1.75	0.55	12	0.62	0.25	360	430
<b>BF18</b> ②	1	1.19	3.00	1.50	0.44	18	0.75	0.25	360	430
<b>BF18N</b> ②	1	1.19	3.00	1.50	0.44	18	0.75	0.25	360	430
<b>BF24</b> ②	1	1.19	3.00	1.50	0.44	24	0.75	0.25	360	430
<b>BF24N</b> ②	1	1.19	3.00	1.75	0.56	24	0.62	0.25	360	430
<b>BG12</b>	1	1.50	3.00	1.50	0.44	12	0.75	0.25	415	495
<b>BG12N</b> ①	1	1.50	3.00	1.75	0.56	12	0.62	0.25	415	495
<b>BG18</b>	1	1.50	3.00	1.50	0.44	18	0.75	0.25	415	495
<b>BG18N</b> ①	1	1.50	3.00	1.75	0.56	18	0.62	0.25	415	495
<b>BG24</b>	1	1.50	3.00	1.50	0.44	24	0.75	0.25	415	495
<b>BG24N</b> ①	1	1.50	3.00	1.75	0.56	24	0.62	0.25	415	495

① Tongue drilled per (2) hole NEMA Standard

② Certified to CSA C22.2, No. 41 Grounding and Bonding Equipment Standards in addition to the UL467 Listing which all items above are Listed to.

NOTE: Equivalent sizes may be designated by suffix letters representing variations in length, mounting configurations, pad size and finish. Contact factory for details. For Tin plated ferrules add suffix -TN to the catalog number.

Blue highlighted items are industry standard and most frequently ordered.

## TYPE B

### Flexible Copper Braid (Continued)



E-56

Catalog Number	Number of Braids in Ferrules	C	D	E	K	L	N	T	Approximate Ampere Rating	
									Indoor	Outdoor
B2D12 ②	2	0.94	2.5	1.25	0.44	12	0.62	0.25	380	455
B2D12N ②	2	0.94	3.00	1.75	0.56	12	0.62	0.25	380	455
B2E12	2	1.62	3.00	1.50	0.44	12	0.75	0.25	530	635
B2E12N ①	2	1.62	3.00	1.75	0.56	12	0.62	0.25	530	635
B2F12	2	1.38	3.00	1.50	0.44	12	0.75	0.38	600	720
B2F12N ①	2	1.38	3.00	1.75	0.56	12	0.62	0.38	600	720
B2G12N ①	2	1.50	3.00	1.75	0.56	12	0.62	0.50	700	840
B3D12	3	1.19	2.50	1.25	0.44	12	0.62	0.25	470	560
B3D12N ②	3	1.19	3.00	1.75	0.56	12	0.62	0.25	470	560
B3E12	3	1.64	3.00	1.50	0.44	12	0.75	0.31	700	840
B3E12N ①	3	1.64	3.00	1.75	0.56	12	0.62	0.31	700	840
B3F12	3	1.44	3.00	1.50	0.44	12	0.75	0.56	820	980
B3F12N ①	3	1.44	3.00	1.75	0.56	12	0.62	0.56	820	980
B3G12	3	1.69	3.00	1.50	0.44	12	0.75	0.69	960	1150
B3G12N ①	3	1.69	3.00	1.75	0.56	12	0.62	0.69	960	1150
B4D12	4	1.19	2.50	1.25	0.44	12	0.62	0.32	600	720
B4D12N ①	4	1.19	3.00	1.75	0.56	12	0.62	0.32	600	720
B4E12	4	1.64	3.00	1.50	0.44	12	0.75	0.38	850	1020
B4E12N ①	4	1.64	3.00	1.75	0.56	12	0.62	0.38	850	1020
B4F12	4	1.50	3.00	1.50	0.44	12	0.75	0.78	1000	1200
B4F12N ①	4	1.50	3.00	1.75	0.56	12	0.62	0.78	1000	1200
B4G12N ①	4	1.69	3.00	1.75	0.56	12	0.62	0.94	1200	1440

① Tongue drilled per (2) hole NEMA Standard

② Certified to CSA C22.2, No. 41 Grounding and Bonding Equipment Standards in addition to the UL467 Listing which all items above are Listed to.

#### NOTE:

Equivalent sizes may be designated by suffix letters representing variations in length, mounting configurations, pad size and finish. Contact factory for details. For Tin plated ferrules add suffix -TN to the catalog number.

Blue highlighted items are industry standard and most frequently ordered.





TYPES GB, GBM

Ground Connector

For Copper Cable to Bar

High copper alloy ground connector for joining a range of cable to 1/4" thick bar.\* Type GB separates cable from bar, GBM clamps cable directly on bar surface. One-wrench installation. UL467 Listed. The high copper alloy cast body and DURIUM™ bolts, nuts, and lockwashers make the GB and GBM suitable for direct burial in concrete or ground.

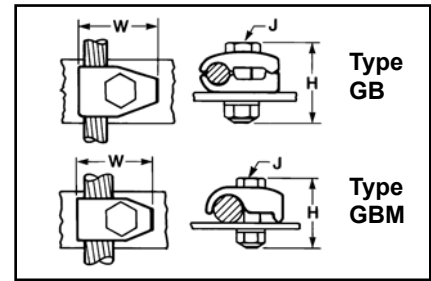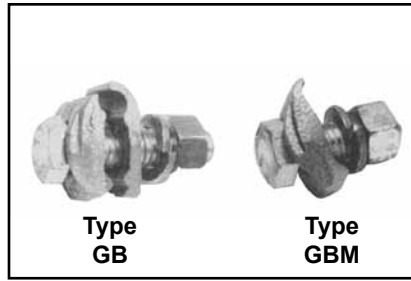

NOTE:

\* The GB, GBM, GC, GCM, GL and GZ are all used for joining a range of cable to bar. The catalog numbers in each table accommodate the indicated cable range and up to 1/4" thick bar. Optional bolt lengths are available to accommodate up to 1" thick bar. For bar thicknesses from 1/4" to 1/2", add the suffix "T4" to the catalog number in the table. For bar thicknesses from 1/2" to 1", add the suffix "T8" to the catalog number in the table.

Catalog Number		Cable	H Type GB / GBL	H Type GBM	J	W Type GB/ GBL	W Type GBM	Rec. Torque
Type GB	Type GBM							
<b>GB4C</b>	<b>GBM4C</b>	8 AWG-4 AWG	1-1/2	1-1/2	3/8	1-1/4	1-1/4	240
<b>GB26</b>	<b>GBM26</b>	4 AWG-2/0 AWG	2	1-1/2	3/8	1-1/2	1-1/2	240
<b>GBL30</b> ①	—	4 AWG-300 kcmil	2	—	1/2	1-7/8	—	480
<b>GB29</b>	<b>GBM29</b>	2/0 AWG-250 kcmil	2	2	1/2	2	2	480
<b>GB34</b>	<b>GBM34</b>	300 kcmil-500 kcmil	3	2-1/4	1/2	2-3/8	2-3/8	480



① GBL30 is not UL Listed

TYPES GC, GCM

Ground Connector

For Two Copper Cables to Bar

High copper alloy ground connector for joining a wide range of two parallel cables to 1/4" thick bar.\* Type GC separates cable from bar, GCM clamps cable to bar surface. One-wrench installation. UL467 Listed. The high copper alloy cast body and DURIUM™ bolts, nuts, and lockwashers make the GC and GCM suitable for direct burial in concrete or ground.

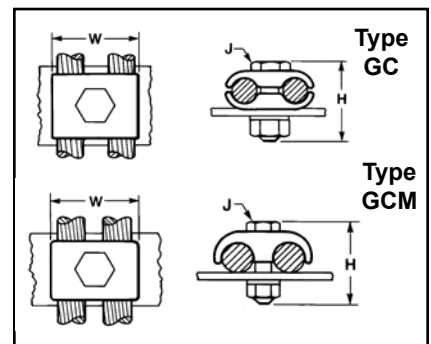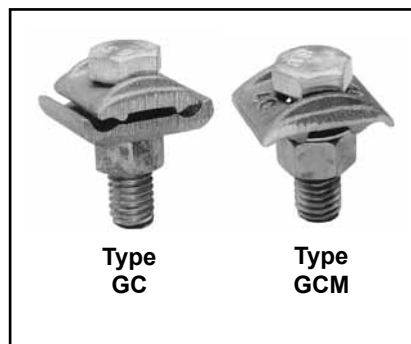

NOTE:

\* The GB, GBM, GC, GCM, GL and GZ are all used for joining a range of cable to bar. The catalog numbers in each table accommodate the indicated cable range and up to 1/4" thick bar. Optional bolt lengths are available to accommodate up to 1" thick bar. For bar thicknesses from 1/4" to 1/2", add the suffix "T4" to the catalog number in the table. For bar thicknesses from 1/2" to 1", add the suffix "T8" to the catalog number in the table.

Catalog Number		Cable	H Type GC	H Type GCM	J	W Type GC/GCL	W Type GCM	Rec. Torque
Type GC	Type GCM							
<b>GC4C4C</b>	<b>GCM4C</b>	8 AWG-4 AWG	1-1/2	1-1/2	3/8	1-3/8	1	240
<b>GC2626</b>	<b>GCM26</b>	4 AWG-2/0 AWG	2	1-1/2	3/8	1-3/4	1-3/8	240
<b>GCL30</b>	<b>GCM30</b>	5 AWG-300 kcmil	2	—	1/2	1	—	480
<b>GC2929</b>	<b>GCM29</b>	2/0 AWG-250 kcmil	2-1/4	2	1/2	2-1/4	2	480
<b>GC3434</b>	<b>GCM34</b>	300 kcmil-500 kcmil	2-7/8	2-1/4	1/2	2-7/8	2-5/8	480



Blue highlighted items are industry standard and most frequently ordered.

## TYPE GL

### Ground Connector

#### For Two Copper Cables to Bar

High copper alloy ground connector for joining a wide range of two parallel cables to 1/4" thick bar.\* Two-bolt design, separates cable from bar. One-wrench installation. UL467 Listed. The high copper alloy cast body and DURIMUM™ bolts, nuts, and lockwashers make them suitable for direct burial in concrete or ground.

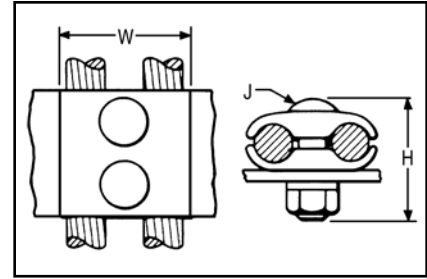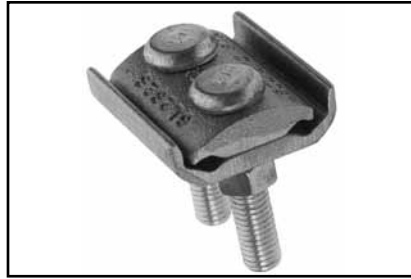

Catalog Number	Conductor	H	J	W
<b>GL4C4C</b>	8 AWG-4 AWG	1-1/2	3/8	1-3/8
<b>GL2626</b>	4 AWG-2/0 AWG	2	3/8	1-3/4
<b>GL2929</b>	2/0 AWG-250 kcmil	2-1/4	1/2	2-1/4
<b>GL3434</b>	300 kcmil-500 kcmil	2-7/8	1/2	2-7/8

**NOTE:**

\* The GB, GBM, GC, GCM, GL and GZ are all used for joining a range of cable to bar. The catalog numbers in each table accommodate the indicated cable range and up to 1/4" thick bar. Optional bolt lengths are available to accommodate up to 1" thick bar. For bar thicknesses from 1/4" to 1/2", add the suffix "T4" to the catalog number in the table. For bar thicknesses from 1/2" to 1", add the suffix "T8" to the catalog number in the table.

E-58




## TYPE GZ

### Ground Connector

#### For Copper Cable to Bar

High copper alloy ground connector for joining a wide range of cable to 1/4" thick bar\*. Cable is gripped by curving it around the clamping bolt in connector groove. UL467 Listed. The high copper alloy cast body and DURIMUM™ bolts, nuts, and lockwashers make them suitable for direct burial in concrete or ground.

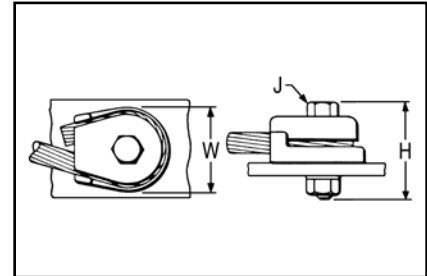

Catalog Number	Conductor	H	J	W
<b>GZ4C-38</b>	8-4	1-1/2	3/8	1-1/8
<b>GZ4C-12</b>	8-4	1-7/8	1/2	1-3/4
<b>GZ4C-58</b>	8-4	2	5/8	1-3/4
<b>GZ26-38</b>	3-2/0	2	3/8	1-5/8
<b>GZ26-12</b>	3-2/0	2-1/8	1/2	1-3/4
<b>GZ26-58</b>	3-2/0	2-1/4	5/8	1-3/4
<b>GZ29-38</b>	3/0-250	2-1/4	3/8	2-1/4
<b>GZ29-12</b>	3/0-250	2-3/8	1/2	2-1/4
<b>GZ29-58</b>	3/0-250	2-1/2	5/8	2-1/4

**NOTE:**

\* The GB, GBM, GC, GCM, GL and GZ are all used for joining a range of cable to bar. The catalog numbers in each table accommodate the indicated cable range and up to 1/4" thick bar. Optional bolt lengths are available to accommodate up to 1" thick bar. For bar thicknesses from 1/4" to 1/2", add the suffix "T4" to the catalog number in the table. For bar thicknesses from 1/2" to 1", add the suffix "T8" to the catalog number in the table.




Blue highlighted items are industry standard and most frequently ordered.

TYPE GC-CT

Cabletray Ground Clamp

This unique connector incorporates features which are unmatched. Made of tin-plated cast copper alloy, it accommodates either one or two conductors, copper or aluminum cable. In addition to a low profile head with a deep Phillips recess, the galvanized steel bolt has a ribbed neck which prevents rotation during installation when installed in a 0.44 diameter hole. When used on aluminum conductor, the cable must be scratch brushed and PENETROX™ A joint compound must be used on cable and connector. UL467 Listed for copper conductor only. Suitable for direct burial in concrete or earth.

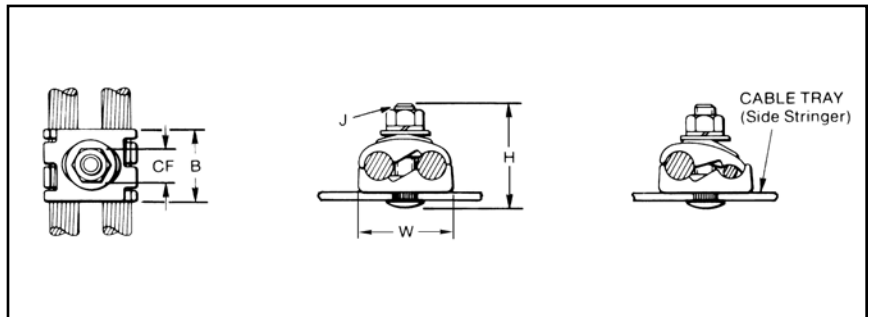

E-59

Catalog Number	Accommodates Copper or Aluminum Conductor in either groove	B	CF	H	J	W
<b>GC2525CT</b>	#6 Sol. (0.16 Dia.) - 1/0 Str. (0.37 Dia.)	1.12	0.56	1.95	3/8	1.45
<b>GC2626CT</b>	#2 Sol. (0.26 Dia.) - 2/0 Str. (0.42 Dia.)	1.12	0.56	1.95	3/8	1.70
<b>GC2929CT</b>	2/0 Str. (0.41 Dia.) - 250 kcmil (0.58 Dia.)	1.12	0.56	2.20	3/8	1.98

NOTE:

The bolt head is mounted on the inside wall of cabletray to avoid damage to the cable insulation. May be used with aluminum or galvanized steel cabletray.



Blue highlighted items are industry standard and most frequently ordered.

## TYPE GIE-G

### Ground Connector

For Vehicle Grounding Heavy Duty Construction

High-strength copper alloy ground clamps for grounding gasoline trucks, tank cars, aircraft and other vehicles where danger of explosion due to static electricity exists. Corrosion resistant and supplied with nonsparking, adjustable, replaceable contact grip screws. Automatic safety release disconnects should a vehicle unexpectedly move from the grounded area. Accommodates 4 Str. flexible copper cable.

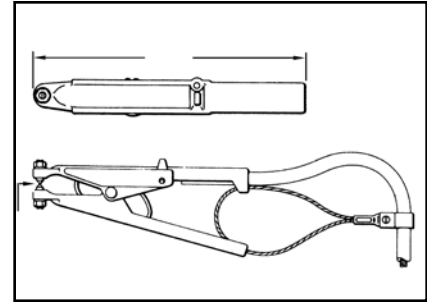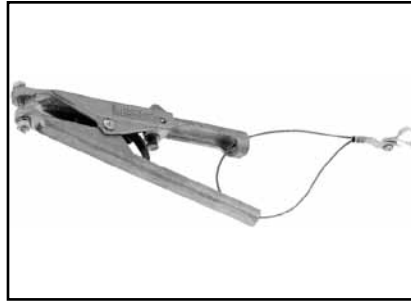

Catalog Number	Description	Material	Point Configuration
<b>GIE4CG3</b>	Assembly Beryllium Copper	Beryllium Copper	Assembly
<b>GIE4CG4</b>	Assembly Stainless Steel	Stainless Steel	Assembly

Replacement Tips Only			
Catalog Number	Description	Material	Point Configuration
<b>GIE4CG3P5</b>	Beryllium Copper CONE Point Only	Beryllium Copper	Cone Point
<b>GIE4CG3P7</b>	Beryllium Copper CUP Point Only	Beryllium Copper	Cup Point
<b>GIE4CG4P5</b>	Stainless Steel CONE Point Only	Stainless Steel	Cone Point
<b>GIE4CG4P7</b>	Stainless Steel CUP Point Only	Stainless Steel	Cup Point

E-60



## TYPE GIE-G

### Ground Connector

For Vehicle Grounding, Heavy Duty Construction

Accommodates flexible rubber sheath cable ranging from #6 to #2 conductor.

Catalog Number: **GIE2CG3**

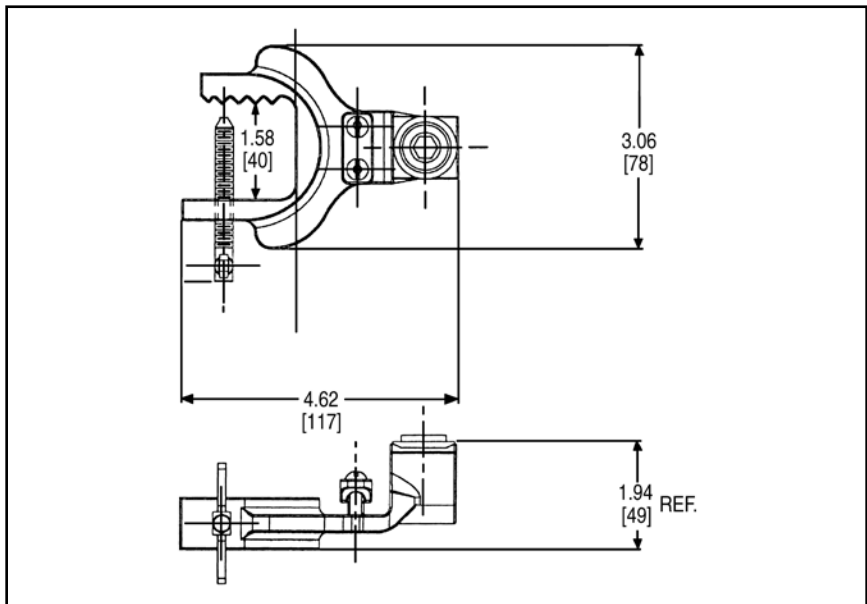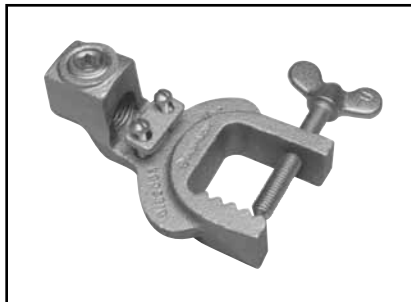


Blue highlighted items are industry standard and most frequently ordered.

**TYPE GCB63T13G1**

**STUDBUG™ for Static Grounding  
Applications**


GCB63T13G1 is a temporary grounding stud for use on rail cars, chemical trucks, hazardous waste tankers or a petroleum vehicle to allow for static grounding protection, while in operation. It provides a contact point, allowing the rail car, truck or tanker to be grounded to an equipotential grid or ground rod, by using static reel or a ground cable.

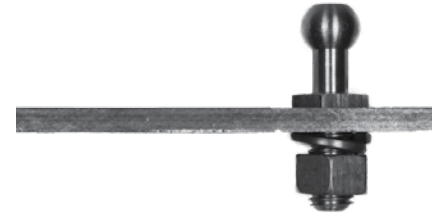

E-61

**Features & Benefits**

- Made of bronze, and supplied with silicon bronze hardware
- Secured by 1/2" hexagonal nut and split lock washer
- Can be used with universal clamps and ball stud clamps
- Can be used at various angles to reach inaccessible areas
- Add suffix "SS" for grounding stud with stainless steel hardware

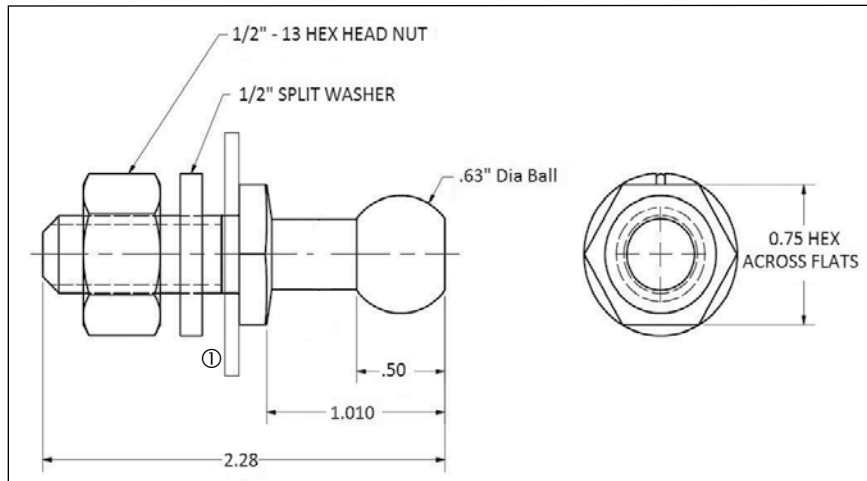

Note:  
 ① Can be used with plate, bus bar or structural steel up to 1/4" thick.

Blue highlighted items are industry standard and most frequently ordered.

## BURNDY® Static Discharge Reels

Static Discharge Reels are an excellent addition to the BURNDY® static discharge line of products. These reels are often used to dissipate static charge buildup developed while filling or dispensing fuel or other combustible liquids from fuel trucks or rail cars. Often used in the petroleum industry but applicable in any area where static discharge creates a potential hazard.



### Features & Benefits

- Automatic E-Z PULL™ Rewinding
- Rugged Steel Construction
- Compact Enclosed Design
- Positive Ratchet Lock
- Includes Ratchet On/Off Switch
- Steel Cable Installed
- 100 Amp Universal Jaw-Type Grounding Clamp
- Red Baked-on Finish
- 50' Cable Length
- Made in the USA

E-62

BURNDY® offers the three most common static discharge reels found in the market. These reels are heavy duty, with 50' lengths and are supplied with a 100 amp universal jaw-type grounding clamp. All reels come standard with spring rewind and centrifugal brake. The tension can be adjusted on these reels and installation instructions are included to ensure the most efficient mounting method.





Every reel is **Proudly Made in the USA** and meets the stringent quality expectations of the BURNDY® portfolio of grounding products.

Catalog Number	Cable Length	# of Jaw-Type Grounding Clamps	Weight (lb.)
<b>BSD2050</b>	50 Feet	1	12
<b>BSD2050N</b>	50 Feet (Nylon Covered)	1	12
<b>BSD2050Y</b>	35 Feet plus 15 Feet for 'Y'	2	13

Blue highlighted items are industry standard and most frequently ordered.

**RAIL CONNECTOR**

Mechanical clamp connectors designed for use in power, contact or running rail applications. Connectors are cast of a high conductivity copper alloy, tin-plated, and assembled with high-strength DURIMUM™ hardware. Connectors designed for extended service life.

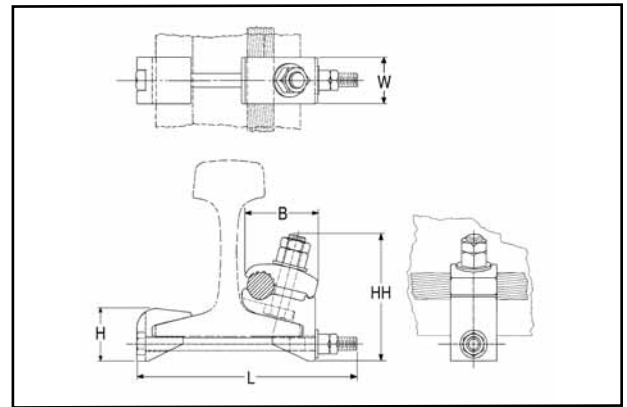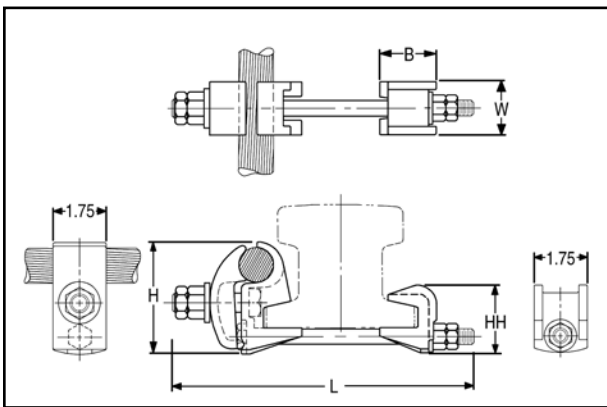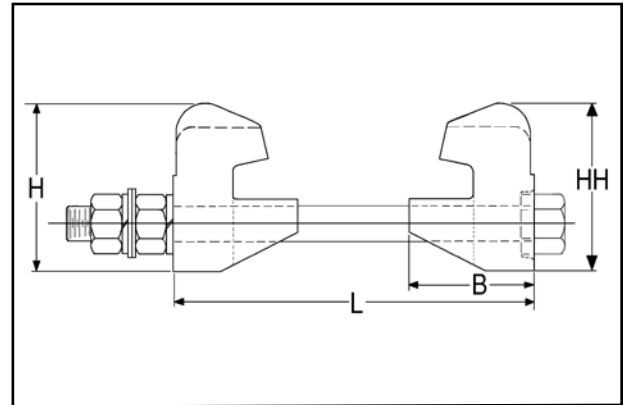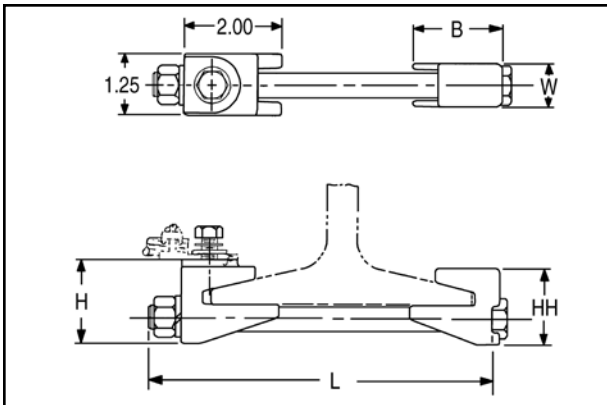

E-63

Catalog Number	Fig. No.	Accommodates	B	H	HH	L	W
J278	1	100 Lbs. A.R.E.A Running Rail	1.81	1.88	1.72	7.50	0.88
J279	1	75 or 90 Lbs. Running Rail	1.81	1.71	1.55	7.50	0.88
J280	1	150 Lbs. Contact Rail	2.12	2.08	1.92	7.00	1.25
J295	2	150 Lbs. Third Rail	2.62	3.50	3.50	7.75	3.00
RGC44G1 ①	3	150 Lbs. NMC Contact Rail and (1) 800-1000 kcmil CU Cable	1.75	2.82	2.25	10.00	1.75
RGC39G1 ①	4	115 Lbs. Contact or Running Rail and (1) 500-750 kcmil CU Cable	2.75	2.00	4.78	8.32	1.25

① Tin-plated

Blue highlighted items are industry standard and most frequently ordered.


## QGFL

### BARTAP™

For Copper Cable to  
Flat Bar or Pad



High copper alloy BARTAP™ for joining a range of cable to bar or pad. One-wrench installation. DURIMUM™ nut and lockwasher. Can be installed side by side or in line on NEMA drilled bar.

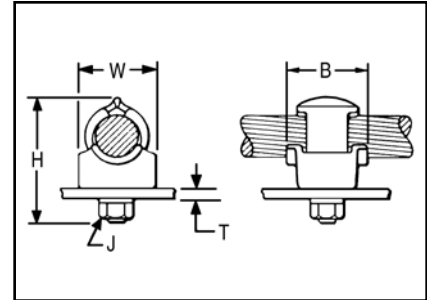

E-64

Catalog Number	Copper Conductor	B	H	J	T (Max)	W
QGFL1CB1	#10 Sol. - #1 Str.	1-1/8	1-7/8	3/8	1/4	1
QGFL1CB1T6	#10 Sol. - #1 Str.	1-1/8	2-3/8	3/8	3/4	1
QGFL26B1	#8 Sol. - #2/0 Str.	1-1/4	2-1/8	3/8	1/4	1-1/8
QGFL26B1T6	#8 Sol. - #2/0 Str.	1-1/4	2-5/8	3/8	3/4	1-1/8
QGFL26B2*	#8 Sol. - #2/0 Str.	1-1/4	2-8/25	1/2	1/4	1-1/8
QGFL26B2T6*	#8 Sol. - #2/0 Str.	1-1/2	2-40/50	1/2	3/4	1-1/8
QGFL29B1*	#6 Str. - 250 kcmil	1-2/5	2-5/8	1/2	1/4	1-3/8
QGFL29B1T6*	#6 Str. - 250 kcmil	1-5/8	3-1/8	1/2	3/4	1-3/8
QGFL31B1*	2 AWG - 350 kcmil	1-3/4	2-7/8	1/2	1/4	1-5/8
QGFL31B1T6*	2 AWG - 350 kcmil	1-3/4	3-1/4	1/2	3/4	1-5/8
QGFL34B1	1/0 -500 kcmil	2	3-1/8	1/2	1/4	1-3/4
QGFL34B1T6	1/0 -500 kcmil	2	3-5/8	1/2	3/4	1-3/4
QGFL39B1	350 kcmil - 750 kcmil	2-1/4	3-1/4	1/2	1/4	1-3/4
QGFL39B1T6	350 kcmil - 750 kcmil	2-1/4	3-5/8	1/2	3/4	1-3/4
QGFL44B1	750 kcmil - 1000 kcmil	2-1/4	3-3/8	1/2	1/4	2-1/8
QGFL44B1T6	750 kcmil - 1000 kcmil	2-1/4	4-1/8	1/2	3/4	2-1/8
QGFL46B1	1000 kcmil - 1500 kcmil	2-1/4	4	1/2	1/4	2-1/2
QGFL46B1T6	1000 kcmil - 1500 kcmil	2-1/4	4-1/2	1/2	3/4	2-1/2
QGFL48B1	1500 kcmil - 2000 kcmil	2-1/4	4-3/4	1/2	1/4	3


\* Can be installed side by side or in line on NEMA drilled bar.

## TYPE GA-H

### Ground Connector

For Copper Cable to "H" Beam

High copper alloy ground connector for joining a wide range of cable parallel to "H" beams or square tube. Hardware is made from DURIMUM™ for superior corrosion protection.

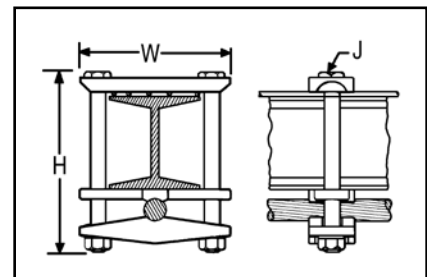

Catalog Number	Conductor		H	J	W
	"H" Beam	Cable			
GA25H26	1-7/8" - 2-1/2" X 2-1/2"	4 Sol. - 2/0 Str.	4-3/4	3/8	4

Blue highlighted items are industry standard and most frequently ordered.




**TYPE GXP1828RF**

**SUPER-CLAMP™**

**SUPER-CLAMP™ RAISED FLOOR  
GROUND CONNECTOR**


Raised Floor Pedestal Ground Connector. The GXP1828RF is a versatile, easy to install, range taking ground connector. This grounding clamp accepts a wide range of pedestals and conductors. Accepted pedestal range is 3/4" through 2" (7/8 - 2" round; 3/4" - 1-1/2" square). The wire range is #6 solid to 4/0 stranded. The wires can be arranged in parallel or in a cross grid configuration - accepts 1 or 2 wires.

UL Listed for the US and Canadian markets (cULus). A high copper alloy body ensures excellent conductivity and the hardware is made of stainless steel. The connector is also rated for Direct Burial. The versatility of the connector makes it an excellent choice for applications requiring multiple conductor sizes and/or configurations.

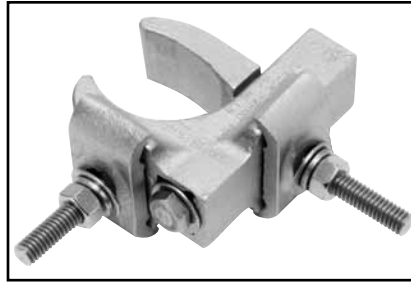

**Features & Benefits**



- Fits a wide range of raised floor pedestals, from 3/4" to 2" (7/8 - 2" round; 3/4" - 1-1/2" square)
- Accepts a wide range of wire sizes, from #6 solid to 4/0 stranded
- Accommodates parallel wires or cross grid arrangements; wires can be installed in cross grid configuration!
- Accepts one or two wires in any configuration
- Easy to install - open design eliminates need to disassemble before installing
- One socket size fits all hardware! (1/2" socket size)
- Made of high copper alloy
- Stainless steel hardware
- UL Listed for the US and Canadian markets (cULus)
- Rated for Direct Burial

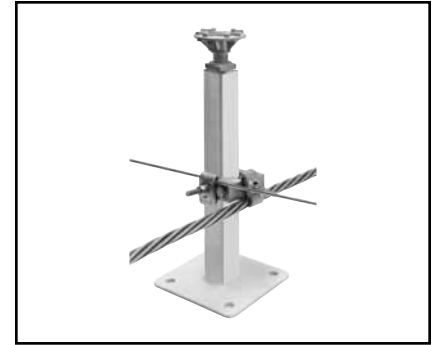

**Cross Grid Configuration**



**Parallel Configuration**

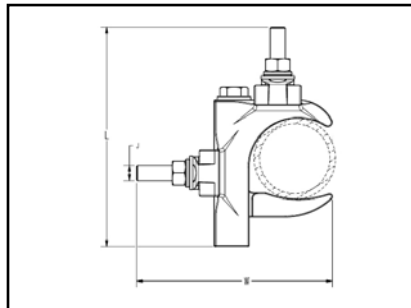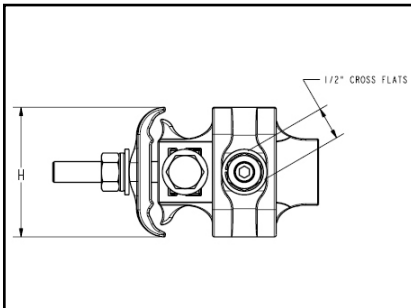

**Works on either  
Round or Square Pedestals**

Catalog Number	Copper Conductor Range (Concentric & Compact Stranded 19 Str. Max)	Pedestal Range	Reference Dimensions				Recommended Tightening Torque (in-lb.)	
			L	W	H	J	Conductor Saddle (Nut)	Pedestal Clamp (Bolt)
<b>GXP1828RF</b>	6 AWG 5 AWG 4 AWG 3AWG 2 AWG 1AWG 1/0 AWG 2/0 AWG 3/0 AWG 4/0 AWG	Round: 7/8" - 2" Square: 3/4" - 1-1/2"	4.53	3.94	1.96	5/16	120	180



Blue highlighted items are industry standard and most frequently ordered.

## TYPE GRF

### UNIGROUND™

#### UNIGROUND™ Raised Floor Grounding Connector

The BURNDY® UNIGROUND™ is a universal grounding clamp, specifically designed for all raised flooring systems. It can be installed on round or square pedestals and can accommodate one or two grounding wires to make an efficient grid. The underfloor signal reference grid provides the low impedance ground path that attenuates high frequency static and 60 Hz transient noise for cleaner data output. UL467 Listed.

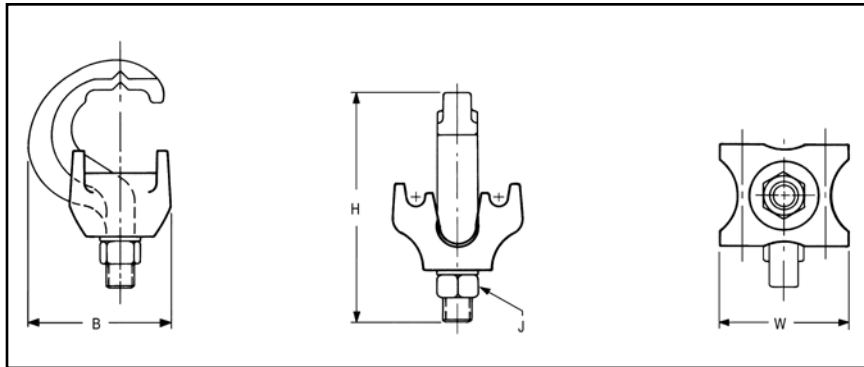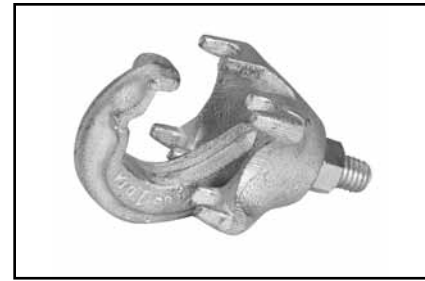

#### Features & Benefits

- One connector fits all applications
- Ease of specification and installation
- Single bolt design
  - Ease of installation:
    - No need to disassemble
    - Single wrench installation
- Accepts 1 or 2 ground conductors
- Requires less connectors to install signal reference grid
- Tin plated cast bronze construction
- Resists corrosion and provides extended life ground connection
- Grounds all pedestals (round or square). Will handle up to 7/8" square and 1" round
- Ease of installation. One connector does it all
- Serves 3 needs:
  1. Signal Reference Grid
  2. Static Ground
  3. Fault Current Ground
- UNIGROUND™ solves all possible grounding problems found in computer applications today



E-66


Catalog Number	Number of Conductors	Conductor Size Sol. & Str.	Pedestal Type		B	H	J	W
			Round	Square				
GRF4C-3	1 or 2	#8 - #2	Up to 1"	Up to 7/8"	1.96	3.14	3/8	1.76
GRF4C-4	1 or 2	#8 - #2	Up to 3/4"	Up to 5/8"	1.79	3.13	3/8	1.40

Blue highlighted items are industry standard and most frequently ordered.

**TYPES GP-G1, GP-RT**


**Raised Floor Grounding Clamps**

High copper alloy ground connector for raised floor computer grounding applications. These connectors can be installed on round and square pedestal applications and will accommodate one or two grounding wires to make an efficient grid. The underfloor signal reference grid provides the low impedance ground path that attenuates high frequency static and 60 Hz transient noise for cleaner data output. UL467 Listed. In addition we offer the GP1726RT, which is especially designed for penetrating epoxy paint on pedestals. This patented connector offers a low impedance, time saving connection between conductors and the pedestal.

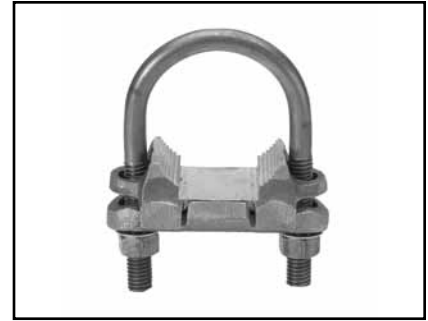

**Features & Benefits**

- Accepts 1 or 2 Ground Conductors
- Requires less connectors to install signal reference grid
- Made of copper alloy
- DURIMUM™ U-Bolts, nuts and lockwashers
- Provides a low impedance ground path for maximum performance
- Grounds all pedestals (round or square)
- Will handle from 3/4" to 1" round or square
- Ease of installation.
- Serves 3 needs
  1. Signal Reference Grid
  2. Static Ground
  3. Fault Current Ground
- Connectors solves all possible grounding problems found in computer applications today

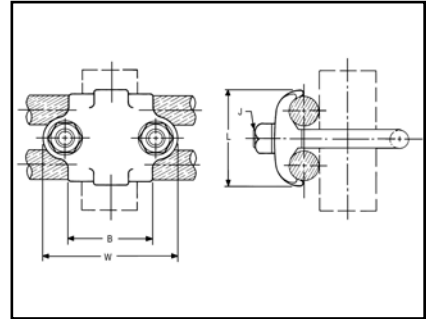

E-67

Catalog Number	Number of Conductors	Conductor Size Sol. & Str.	Pedestal Type	B	J	L	W
			Round or Square				
GP654CG1	1 or 2	#8 Sol. - 4 Str.	Round/Square	1.50	3/8	1.31	2.38
GP64526G1	1 or 2	#4 Sol. - 2/0 Str.	Round/Square	1.50	3/8	1.69	2.38
GP1526G1	1 or 2	#4 Sol. - 2/0 Str.	Round	1.75	3/8	1.69	2.62
GP1726RT	1 or 2	#6 Sol. - 2/0 Str.	Round/Square	2.12	3/8	1.50	3.22
GP1726G1	1 or 2	#6 Sol. - 2/0 Str.	Round	2.12	3/8	1.50	3.22


Blue highlighted items are industry standard and most frequently ordered.

## TYPE BBB

### BURNDY® Bus Bar

#### Copper Bus Bar

Bare copper BusBar, UL Listed for grounding. Available in many sizes and hole patterns. Brackets and insulators included with most styles. Also available in undrilled, horizontal and vertical versions. BusBar is used in a variety of applications. Can be used as a common ground point and "power" applications as well.

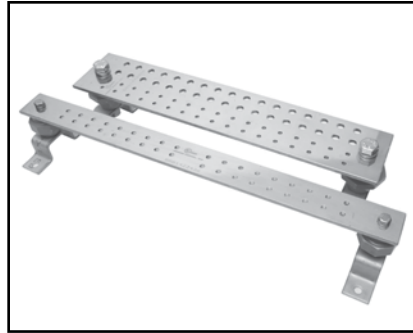

E-68

Catalog Number	Fig No.	Insulator & Bracket	T - Bar Thickness	W - Bar Width	L - Bar Length	E1	E2	E3	F1	F2	No. of Holes	K
<b>BBB-14210A</b>	1	0.63	1/4"	2 in	10"	0.63	—	—	1.00	—	16	0.28
<b>BBB-14224B</b>	2	0.62	1/4"	2 in	24"	0.62	0.75	—	1.00	1.00	36	0.28
<b>BBB-14410C</b>	3	0.75	1/4"	4 in	10"	0.75	1.00	—	1.25	—	22	0.44
<b>BBB-14410D</b>	4	1.25	1/4"	4 in	10"	1.25	1.00	—	1.13	1.13	22	0.44
<b>BBB-14412E</b>	5	0.75	1/4"	4 in	12"	0.75	1.00	—	2.00	1.25	18	0.44
<b>BBB-14412F</b>	6	1.00	1/4"	4 in	12"	1.00	0.75	—	2.00	1.25	24	0.44
<b>BBB-14416G</b>	7	0.75	1/4"	4 in	16"	0.75	1.00	—	1.69	—	24	0.44
<b>BBB-14416H</b>	8	1.00	1/4"	4 in	16"	1.00	1.00	0.75	1.69	—	32	0.44
<b>BBB-14420J</b>	9	1.00	1/4"	4 in	20"	1.00	1.00	0.75	1.00	—	68	0.44
<b>BBB412UD</b>	—	N/A	1/4"	4 in	12"	N/A	N/A	N/A	N/A	N/A	0	—
<b>BBB-424-UD</b>	—	N/A	1/4"	4 in	24"	N/A	N/A	N/A	N/A	N/A	0	—
<b>BBB-HR19</b>	12	0.38	3/16"	3/4 in	19"	0.38	—	—	—	—	8	—
<b>BBB-VR36</b>	13	0.32	1/4"	5/8 in	36"	0.32	—	—	—	—	16	—

\* Contact factory for custom sizes.

#### NOTE:

For separately ordering Insulator & Brackets use catalog number **B38723000**.

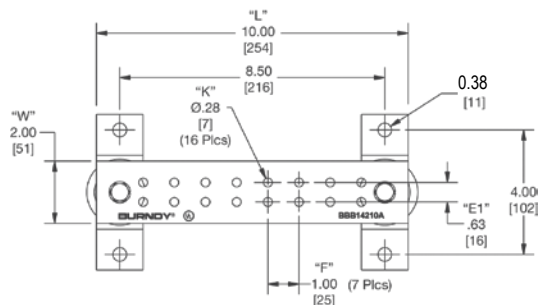


Figure 1

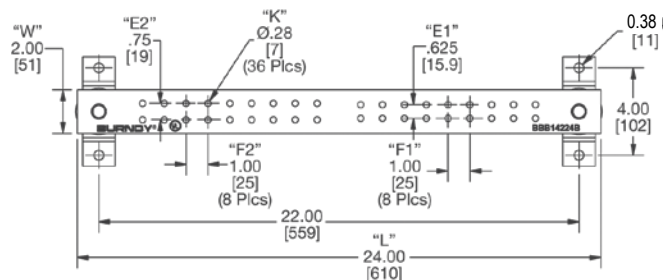


Figure 2

Blue highlighted items are industry standard and most frequently ordered.

TYPE BBB

BURNDY® Bus Bar

Copper Bus Bar (Continued)

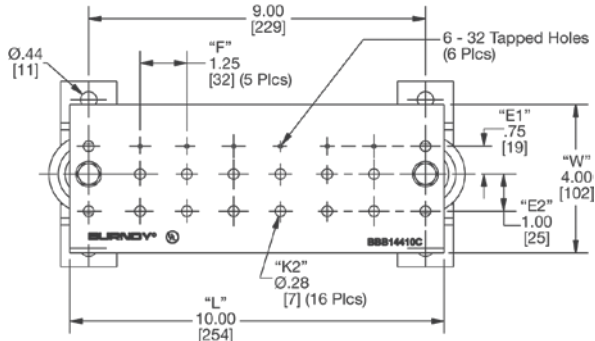


Figure 3

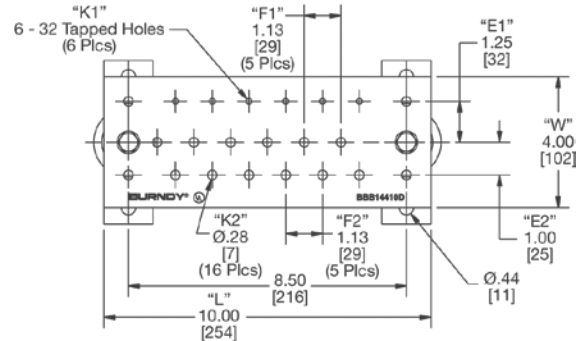


Figure 4

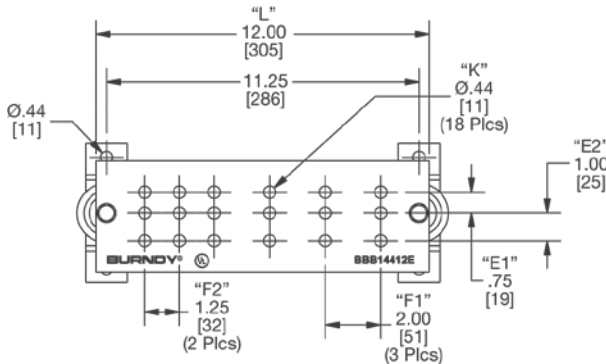


Figure 5

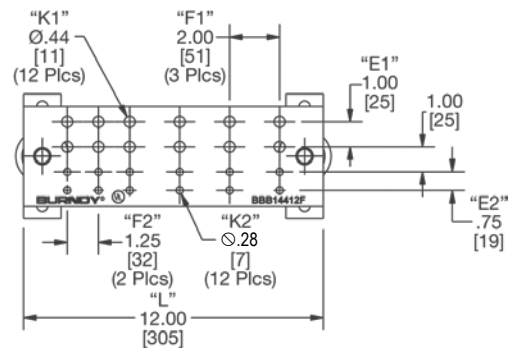


Figure 6

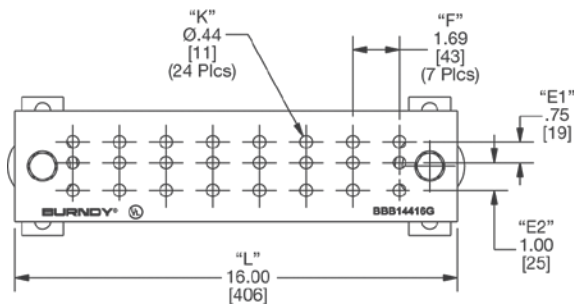


Figure 7

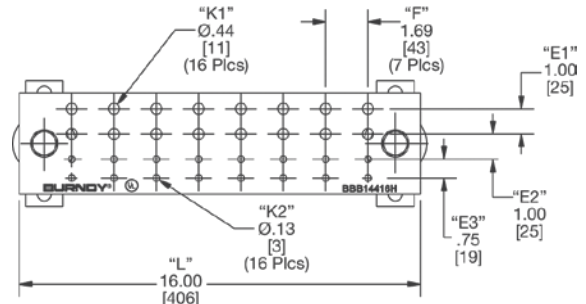


Figure 8

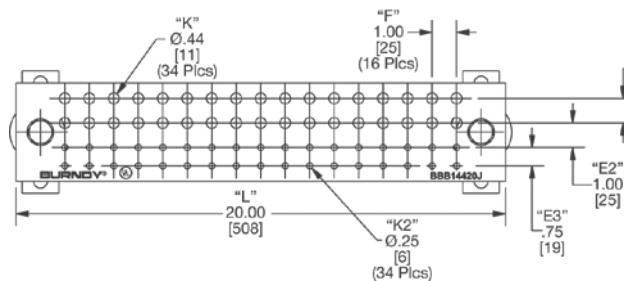


Figure 9

Blue highlighted items are industry standard and most frequently ordered.

## BWB680 Series

### BURNDY® Pool Water Bonding Kit



NEC 680.26(C) states: "An intentional bond of minimum conductive surface area of 9" shall be installed in contact with the pool water. This bond shall be permitted to consist of parts that are required to be bonded in 680.26(B)".

E-70

In order to comply with this requirement BURNDY is offering the BWB680 Series. Made of non-corrosive stainless steel, the BURNDY water bonding kit maintains constant contact with pool water to ensure that the pool is effectively bonded at all times.

BURNDY BWB680 Series is one of the few and the most user friendly, products on the market that complies with this code. Other products are placed in the plumbing, which is not always in contact with the water and therefore does not meet the code. Since the BWB680 Series is placed in the skimmer, it is always in contact with the water.


Included in the BURNDY BWB680 Series Bonding Kit: One (1) bonding plate; one (1) rubber sealing washer; two (2) flat washers; two (2) lock washers; two (2) nuts; and one (1) BURNDY CL501-TN

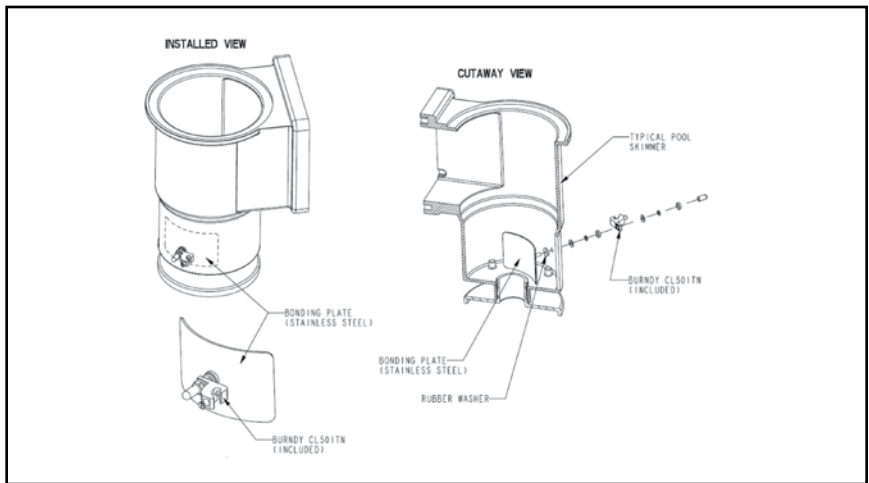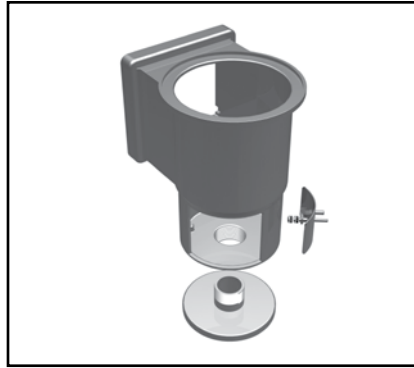

### Features & Benefits

- Easy installation
- Mounting hardware included
- UL Listed
- Placed out of the way on the side wall of the skimmer below the basket

Catalog Number	Pool Type
<b>BWB680AG</b>	Above Ground
<b>BWB680IG</b>	In-Ground

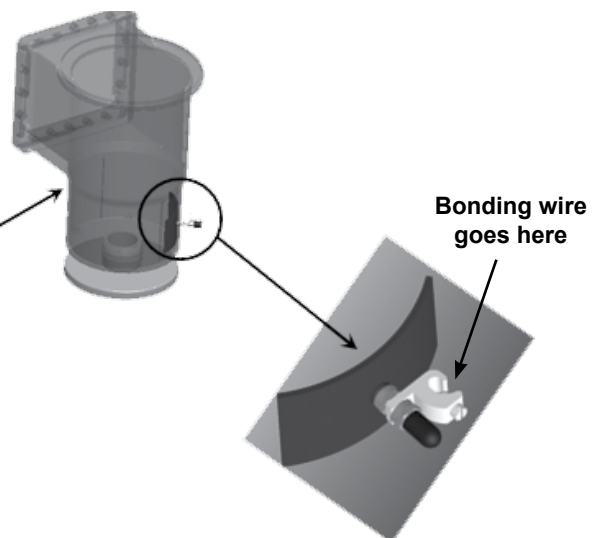

Blue highlighted items are industry standard and most frequently ordered.


**BURNDYWeld®  
QIKLITE®**

**BURNDYWeld® Weld Metal**

**Battery Ignition System**

The self-contained unit offers a built-in battery life indicator, 6' ignitor cord and separate buttons for power and ignition. Also, no starting powder is used with this system so emissions are greatly reduced. QIKLITE® works with "off-the-shelf" molds and weld metal, so contractors and installers can continue to use the same quality BURNDYWeld® products.

Since the unit operates with standard weld metal and molds, installers also have the option of using a traditional flint ignitor or the new QIKLITE® system. Another feature is the speed of ignition, with virtually no delay between depressing the "push to operate" button and ignition of the weld metal. This instant ignition feature offers quick reassurance to the installer, without the delay.

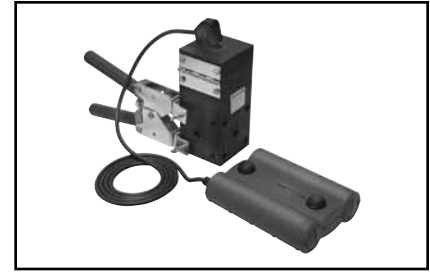

**Features & Benefits**

- The QIKLITE® system allows installers to make exothermic connections remotely
- Uses standard exothermic molds and weld metal
- Use the new BURNDYWeld® QIKLITE® system or use a flint ignitor, this versatility makes this system better than anything available in the industry
- Installers have virtually 100% confidence that the connection can be completed with no wasted material or weld metal shots
- No starting material required - which greatly reduces the amount of emissions generated
- Power is supplied by 4 standard "D" Size batteries
- Built-in battery life indicator

- There's virtually no delay in ignition after depressing the "push to operate" button
- Separate ON/OFF and Operate buttons
- Comes complete with durable 6' heat resistant cord
- Durable, long-lasting design
- QIKSTIK ignitor sticks are conveniently packaged and available separately or available packaged complete with standard weld metal

E-71

Catalog Number Standard Cartridge Size with Ignitor	Cartridges/ Ignitors Per Box
15Q	20
25Q	20
32Q	10
45Q	20
65Q	20
90Q	10
115Q	10
150Q	10
200Q	10
250Q	10
500Q	10
QIKSTIK*	10

\* Ignitor stick only.

Catalog Number	Description
QIKLITE	Battery Ignition System
QIKLITEKIT	QIKLITE® Battery Ignition System and 20 QIKSTIK Ignitor Sticks

Blue highlighted items are industry standard and most frequently ordered.

## BURNDYWeld®

The BURNDYWeld® connection process is a simple, efficient method of welding copper to copper or copper to steel. One advantage is that NO outside power is required when using the BURNDYWeld® exothermic process. The BURNDYWeld® process uses high temperature reaction of powdered copper oxide and aluminum. The reaction takes place in a semi-permanent graphite mold. These molds will last for fifty or more welds if proper care is given. The reaction takes place very rapidly, therefore the total amount of heat applied to the conductors or surfaces is considerably less than that of brazing or soldering. It is important to remember this when welding to insulated cable or thin wall pipe.

E-72



This system is very field friendly, since it is light and portable and requires no outside power source. It requires very little time or skill to obtain an efficient, maintenance free connection when using the BURNDYWeld® process.

For more information, visit our website at: [www.burndy.com](http://www.burndy.com).


The BURNDYWeld® process has been used to weld materials other than copper for electrical purposes. Materials welded include:

- Stainless Steel
- Copperweld®
- Nichrome V
- Galvanized Steel
- Silicon Bronze
- Copper Clad Steel
- Columbium
- Plain Steel
- Everdur®
- Kama
- Stell Rail
- Cor-Ten®
- Brass
- Bronze
- Niobium
- Chromax
- Cast Iron
- Monel

When welding to galvanized steel it is recommended to resurface exposed bare steel.

The BURNDYWeld® connection is a molecular weld. The weld metal has the same melting point as copper. These factors along with the increased cross section of the connection, BURNDYWeld® connections:

1. Will not be affected by a high current surge. Tests have shown that the electrical conductor will melt before the BURNDYWeld® connection when subjected to high short circuit current. Consult IEEE Standard 837-1989.
2. Will not loosen or corrode at the point of weld. There are no contact surfaces or mechanical pressures involved. A BURNDYWeld® connection becomes an integral part of the conductor.
3. Have a current-carrying capacity equal to or greater than that of the conductors.

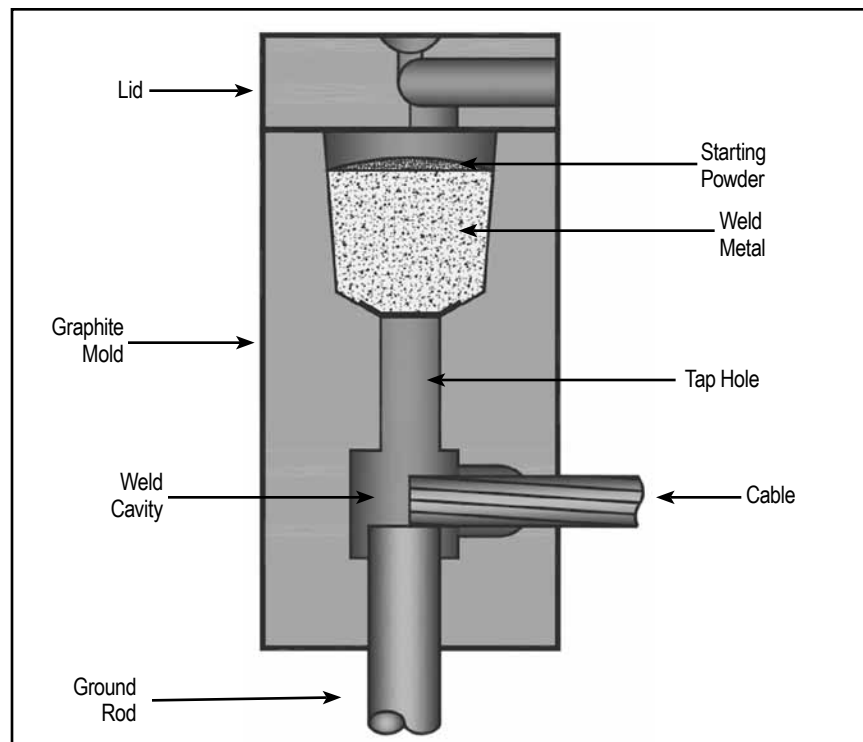

Blue highlighted items are industry standard and most frequently ordered.



Making a BURNDYWeld® Connection



**Step 1**

Position cleaned conductors in mold after make sure mold is dry, by pre-heating or making a test joint.



**Step 2**

Place metal disc in bottom of mold  
crucible.



**Step 3**

Dump powder into crucible, being careful  
not to loosen all the starting powder.

E-73




**Step 4**

Close lid and place a small amount of  
starting powder in the ignition pocket.



**Step 5**

Ignite the starting powder with the Flint  
Ignitor.

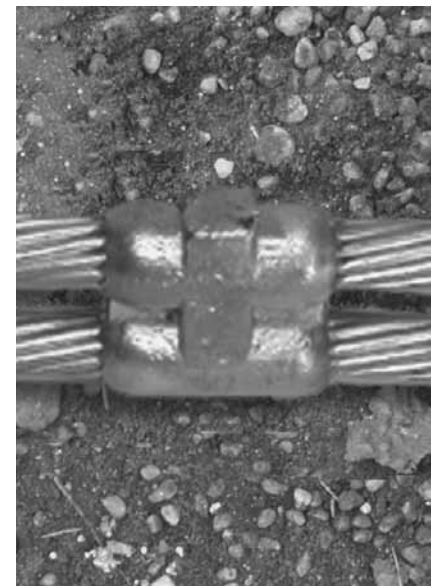

**Step 6**

Wait 15 seconds, then remove weld  
and clean mold before making next  
connection.

Blue highlighted items are industry standard and most frequently ordered.

## BURNDYWeld® Weld Metal



BURNDYWeld® Weld Metal is packed in moisture-resistant plastic cartridges that have tight fitting caps. These cartridges, along with the necessary steel discs, are then packed in boxes that are hermetically sealed. This ensures the powder arriving in good condition, always dry and ready for fast positive ignition. BURNDYWeld® Weld Metal comes in several types; one for welding copper to copper, copper to steel, copper to cast iron and one for welding copper to steel for cathodic protection. The size and weight (in grams) of the cartridge are marked on each individual cartridge.

Weld metal and steel discs are sold only in standard box quantities.

### Features & Benefits

- Packed in moisture-resistant plastic cartridges that have tight fitting caps. These cartridges, along with the necessary steel discs, are then packed in boxes that are hermetically sealed. This ensures the powder arriving in good condition, always dry and ready for fast positive ignition.

E-74

Catalog Number *	Description	Cartridges Per Box
15	Standard Cartridge	20
25	Standard Cartridge	20
32	Standard Cartridge	10
45	Standard Cartridge	20
65	Standard Cartridge	20
90	Standard Cartridge	10
115	Standard Cartridge	10
150	Standard Cartridge	10
200	Standard Cartridge	10
250	Standard Cartridge	10
500	Standard Cartridge	10

\* Add Q to suffix to include Qikstik

Catalog Number	Description	Cartridges Per Box
15CI	Cast Iron Cartridge	20
25CI	Cast Iron Cartridge	20
32CI	Cast Iron Cartridge	10
45CI	Cast Iron Cartridge	20
65CI	Cast Iron Cartridge	20
90CI	Cast Iron Cartridge	10
115CI	Cast Iron Cartridge	10

Catalog Number	Description	Cartridges Per Box
15CP	Cathodic Protection Cartridge	20
25CP	Cathodic Protection Cartridge	20
32CP	Cathodic Protection Cartridge	10
45CP	Cathodic Protection Cartridge	20
65CP	Cathodic Protection Cartridge	20

Weld Metal Size	Catalog Number Steel Discs Only	Package Quantity
15 to 65	B370320-01	20
90 to 115	B370320-02	10
150 to 500	B370320-03	10

Blue highlighted items are industry standard and most frequently ordered.


**BCC-1 TYPE MOLDS**

**Horizontal End to End**

BCC-1 Type Molds are used for horizontal end to end cable connections.

Size range is #6 through 1000 kcmil solid or concentric stranded copper conductors.

Contact BURNDY® for information on molds for conductors not listed below.

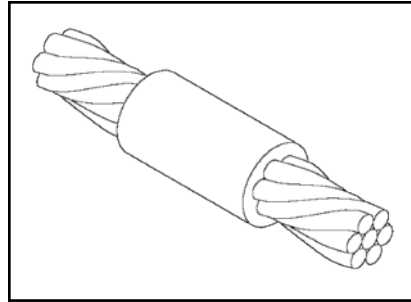

E-75

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
#4	#4	<b>B-5623</b>	18 ①	25	Incl.
#3	#3	<b>B-5624</b>	18 ①	32	Incl.
#2	#2	<b>B-5625</b>	18 ①	32	Incl.
#1	#1	<b>B-5626</b>	18 ①	32	Incl.
1/0	1/0	<b>B-205</b>	4	45	B-106
2/0	2/0	<b>B-206</b>	4	65	B-106
3/0	3/0	<b>B-207</b>	4	90	B-106
4/0	4/0	<b>B-208</b>	4	90	B-106
250 kcmil	250 kcmil	<b>B-209</b>	4	115	B-106
300 kcmil	300 kcmil	<b>B-210</b>	4	115	B-106
350 kcmil	350 kcmil	<b>B-211</b>	4	150	B-106
500 kcmil	500 kcmil	<b>B-213</b>	4	200	B-107
750 kcmil	750 kcmil	<b>B-214</b>	5	2-150	B-107
1000 kcmil	1000 kcmil	<b>B-215</b>	5	2-200	B-107

① B38-0309-00 Flint ignitor included

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number


**Recommended Accessories:**

- B38-0309-00 Flint Ignitor
- B38-3922-00 Mold Cleaning Brush
- B38-0135-00 Cable Cleaning Brush
- B38-0330-00 Cable Clamp

**Blue highlighted items are industry standard and most frequently ordered.**

## TYPE BCC-2 MOLDS

### Horizontal Cable Tap to Horizontal Cable Run

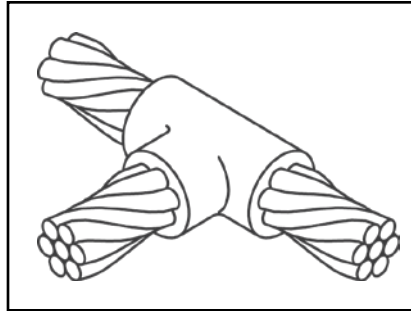

Type BCC-2 Molds are used to join horizontal cable tap to a horizontal run cable. Size range is #6 through 750 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-76


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
#4	#4	B-221	4	32	B-106
#2	#2	B-223	4	45	B-106
	#4	B-224	4	45	B-106
#1	#1	B-225	4	45	B-106
	#2	B-226	4	45	B-106
	#4	B-227	4	45	B-106
1/0	1/0	B-228	4	90	B-106
	#1	B-229	4	45	B-106
	#2	B-230	4	45	B-106
	#4	B-231	4	45	B-106
2/0	2/0	B-232	4	90	B-106
	1/0	B-333	4	90	B-106
	#1	B-234	4	45	B-106
	#2	B-235	4	45	B-106
	#4	B-5475	4	45	B-106
3/0	3/0	B-236	4	115	B-106
	2/0	B-237	4	90	B-106
	1/0	B-238	4	90	B-106
	#1	B-239	4	45	B-106
	#2	B-240	4	45	B-106
4/0	#4	B-5574	4	45	B-106
	4/0	B-241	4	150	B-106
	3/0	B-242	4	115	B-106
	2/0	B-243	4	90	B-106
	1/0	B-244	4	90	B-106
	#1	B-245	4	90	B-106
	#2	B-246	4	90	B-106
	#4	B-5021	4	90	B-106
250 kcmil	250 kcmil	B-247	4	150	B-106
	4/0	B-248	4	150	B-106
	3/0	B-249	4	150	B-106
	2/0	B-250	4	90	B-106
	1/0	B-251	4	90	B-106
	#1	B-252	4	90	B-106
	#2	B-253	4	90	B-106

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
300 kcmil	300 kcmil	B-254	4	200	B-106
	250 kcmil	B-255	4	150	B-106
	4/0	B-256	4	150	B-106
	3/0	B-257	4	150	B-106
	2/0	B-258	4	90	B-106
	1/0	B-259	4	90	B-106
	#1	B-260	4	90	B-106
	#2	B-261	4	90	B-106
350 kcmil	350 kcmil	B-262	4	200	B-106
	300 kcmil	B-263	4	200	B-106
	250 kcmil	B-264	4	200	B-106
	4/0	B-265	4	150	B-106
	3/0	B-266	4	150	B-106
	2/0	B-267	4	90	B-106
	1/0	B-268	4	90	B-106
	#1	B-269	4	90	B-106
	#2	B-270	4	90	B-106
	500 kcmil	500 kcmil	B-280	4	2-150
350 kcmil		B-282	4	200	B-106
300 kcmil		B-283	4	200	B-106
250 kcmil		B-284	4	200	B-106
4/0		B-285	4	150	B-106
2/0		B-286	4	90	B-106
1/0		B-287	4	90	B-106
#1		B-288	4	90	B-106
#2		B-289	4	90	B-106
750 kcmil		750 kcmil	B-290	5	500
	500 kcmil	B-291	5	2-200	B-107
	350 kcmil	B-293	4	250	B-106
	300 kcmil	B-294	4	200	B-106
	250 kcmil	B-295	4	200	B-106
	4/0	B-296	4	150	B-106
	2/0	B-297	4	150	B-106
	1/0	B-298	4	150	B-106

Blue highlighted items are industry standard and most frequently ordered.

**TYPE BCC-4 MOLDS**

**Horizontal to Horizontal  
Cable Cross**

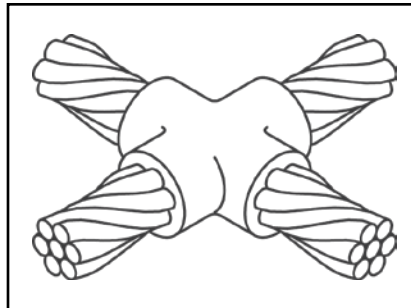

Type BCC-4 Molds are used to join two horizontal cables at right angles. One cable is cut and the other is a through run. Size range is #6 through 500 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-77


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
#4	#4	<b>B-423</b>	4	45	B-106
#3	#3	<b>B-424</b>	4	45	B-106
#2	#2	<b>B-425</b>	4	65	B-106
	#4	<b>B-426</b>	4	65	B-106
#1	#1	<b>B-427</b>	4	65	B-106
	#2	<b>B-428</b>	4	65	B-106
	#4	<b>B-429</b>	4	65	B-106
1/0	1/0	<b>B-430</b>	4	90	B-106
	#1	<b>B-431</b>	4	90	B-106
	#2	<b>B-432</b>	4	90	B-106
2/0	#4	<b>B-433</b>	4	90	B-106
	2/0	<b>B-434</b>	4	115	B-106
	1/0	<b>B-435</b>	4	115	B-106
3/0	#1	<b>B-436</b>	4	115	B-106
	#2	<b>B-437</b>	4	115	B-106
	3/0	<b>B-438</b>	4	150	B-106
4/0	2/0	<b>B-439</b>	4	150	B-106
	1/0	<b>B-440</b>	4	115	B-106
	#1	<b>B-441</b>	4	115	B-106
	#2	<b>B-442</b>	4	115	B-106
	4/0	<b>B-443</b>	4	200	B-106
250 kcmil	3/0	<b>B-444</b>	4	200	B-106
	2/0	<b>B-445</b>	4	150	B-106
	1/0	<b>B-446</b>	4	150	B-106
	#1	<b>B-447</b>	4	115	B-106
250 kcmil	#2	<b>B-448</b>	4	115	B-106
	250 kcmil	<b>B-449</b>	4	200	B-106
	4/0	<b>B-450</b>	4	200	B-106
	3/0	<b>B-451</b>	4	200	B-106
250 kcmil	2/0	<b>B-452</b>	4	150	B-106
	1/0	<b>B-453</b>	4	150	B-106
	#1	<b>B-454</b>	4	115	B-106
250 kcmil	#2	<b>B-455</b>	4	115	B-106

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
300 kcmil	300 kcmil	<b>B-456</b>	4	250	B-106
	250 kcmil	<b>B-457</b>	4	250	B-106
	4/0	<b>B-458</b>	4	200	B-106
	3/0	<b>B-459</b>	4	200	B-106
	2/0	<b>B-460</b>	4	150	B-106
	1/0	<b>B-461</b>	4	150	B-106
	#1	<b>B-462</b>	4	115	B-106
	#2	<b>B-463</b>	4	115	B-106
350 kcmil	350 kcmil	<b>B-464</b>	4	250	B-106
	300 kcmil	<b>B-465</b>	4	250	B-106
	250 kcmil	<b>B-466</b>	4	250	B-106
	4/0	<b>B-467</b>	4	200	B-106
	3/0	<b>B-468</b>	4	200	B-106
	2/0	<b>B-469</b>	4	200	B-106
	1/0	<b>B-470</b>	4	200	B-106
	#1	<b>B-471</b>	4	150	B-106
500 kcmil	#2	<b>B-472</b>	4	150	B-106
	500 kcmil	<b>B-483</b>	5	500	B-107
	350 kcmil	<b>B-485</b>	5	2-200	B-107
	300 kcmil	<b>B-486</b>	5	2-200	B-107
	250 kcmil	<b>B-487</b>	5	2-150	B-107
	4/0	<b>B-488</b>	5	2-150	B-107
	3/0	<b>B-489</b>	5	2-150	B-107
	2/0	<b>B-490</b>	4	250	B-106
1/0	<b>B-491</b>	4	250	B-106	
250 kcmil	#1	<b>B-492</b>	4	200	B-106
	#2	<b>B-493</b>	4	200	B-106

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCC-11 MOLDS

### Horizontal to Horizontal Cable Cross

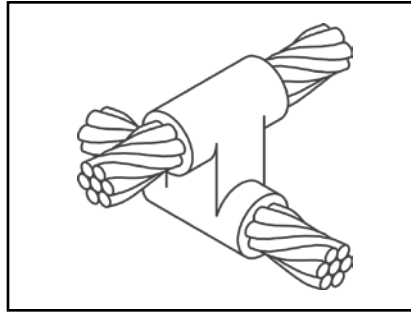

Type BCC-11 Molds are used to join uncut horizontal cables at right angles to each other. Size range is #6 through 500 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-78


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
#6	#6	<b>B-5432</b>	19	45	Incl.
#4	#4	<b>B-2687</b>	4	65	B-106
#2	#2	<b>B-2689</b>	4	90	B-106
	#4	<b>B-2690</b>	4	65	B-106
#1	#1	<b>B-2691</b>	4	115	B-106
	#2	<b>B-2692</b>	4	90	B-106
	#4	<b>B-2693</b>	4	90	B-106
1/0	1/0	<b>B-2694</b>	22	150	B-106
	#1	<b>B-2695</b>	22	150	B-106
	#2	<b>B-2696</b>	22	115	B-106
	#4	<b>B-2697</b>	22	115	B-106
2/0	2/0	<b>B-2698</b>	22	200	B-106
	1/0	<b>B-2699</b>	22	200	B-106
	#1	<b>B-2700</b>	22	150	B-106
	#2	<b>B-2701</b>	22	150	B-106
3/0	3/0	<b>B-2702</b>	22	250	B-106
	2/0	<b>B-2703</b>	22	200	B-106
	1/0	<b>B-2704</b>	22	200	B-106
	#1	<b>B-2705</b>	22	150	B-106
	#2	<b>B-2706</b>	22	150	B-106
4/0	4/0	<b>B-2707</b>	22	250	B-106
	3/0	<b>B-2708</b>	22	250	B-106
	2/0	<b>B-2709</b>	22	200	B-106
	1/0	<b>B-2710</b>	22	200	B-106
	#1	<b>B-2711</b>	22	150	B-106
	#2	<b>B-2712</b>	22	150	B-106

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
250 kcmil	250 kcmil	<b>B-2713</b>	22	2-150	B-106
	4/0	<b>B-2714</b>	22	2-150	B-106
	3/0	<b>B-2715</b>	22	2-150	B-106
	2/0	<b>B-2716</b>	22	250	B-106
	1/0	<b>B-2717</b>	22	150	B-106
	#1	<b>B-2718</b>	22	200	B-106
500 kcmil	#2	<b>B-2719</b>	22	150	B-106
	500 kcmil	<b>B-2747</b>	23	3-250	B-107
	250 kcmil	<b>B-2751</b>	23	500	B-107
	4/0	<b>B-2752</b>	23	500	B-107
	3/0	<b>B-2753</b>	23	500	B-107
	2/0	<b>B-2754</b>	23	2-200	B-107
	1/0	<b>B-2755</b>	22	2-150	B-106
	#1	<b>B-2756</b>	22	250	B-106
	#2	<b>B-2757</b>	22	250	B-106

Blue highlighted items are industry standard and most frequently ordered.

**BCC-6 TYPE MOLDS**

**Horizontal Parallel Tap**

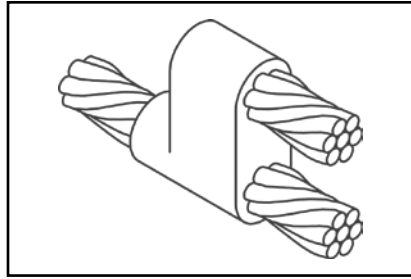

BCC-6 Type Molds are used to join horizontal parallel tap to run connections. The tap cable is over the run cable. Size range is #6 through 4/0 solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
#6 Sol	#6 Sol	<b>B-1270</b>	4	25	B-106
#6	#6	<b>B-1271</b>	4	25	B-106
#4	#4	<b>B-1272</b>	4	32	B-106
	#6	<b>B-1273</b>	4	32	B-106
	#6 Sol	<b>B-1274</b>	4	32	B-106
	#8 Sol	<b>B-1275</b>	4	32	B-106
#2	#2	<b>B-1276</b>	4	65	B-106
	#4	<b>B-1277</b>	4	45	B-106
	#6	<b>B-1278</b>	4	32	B-106
	#6 Sol	<b>B-1279</b>	4	32	B-106
#1	#8 Sol	<b>B-1280</b>	4	32	B-106
	#1	<b>B-1281</b>	4	65	B-106
	#2	<b>B-1282</b>	4	65	B-106
	#4	<b>B-1283</b>	4	45	B-106
#1	#6	<b>B-1284</b>	4	45	B-106
	#6 Sol	<b>B-1285</b>	4	45	B-106
	#8 Sol	<b>B-1286</b>	4	45	B-106
	1/0	1/0	<b>B-1287</b>	4	90
#1		<b>B-1288</b>	4	90	B-106
#2		<b>B-1289</b>	4	65	B-106
#4		<b>B-1290</b>	4	65	B-106
#6		<b>B-1291</b>	4	45	B-106
#6 Sol		<b>B-1292</b>	4	45	B-106
#8 Sol		<b>B-1293</b>	4	45	B-106

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
2/0	2/0	<b>B-1294</b>	4	115	B-106
	1/0	<b>B-1295</b>	4	115	B-106
	#1	<b>B-1296</b>	4	90	B-106
	#2	<b>B-1297</b>	4	90	B-106
	#4	<b>B-1298</b>	4	65	B-106
	#6	<b>B-1299</b>	4	65	B-106
	#6 Sol	<b>B-1300</b>	4	65	B-106
4/0	#8 Sol	<b>B-1301</b>	4	65	B-106
	4/0	<b>B-1302</b>	4	150	B-106
	2/0	<b>B-1303</b>	4	115	B-106
	1/0	<b>B-1304</b>	4	115	B-106
	#1	<b>B-1305</b>	4	115	B-106
	#2	<b>B-1306</b>	4	115	B-106
	#4	<b>B-1307</b>	4	90	B-106
	#6	<b>B-1308</b>	4	90	B-106
	#6 Sol	<b>B-1309</b>	4	90	B-106
	#8 Sol	<b>B-1310</b>	4	90	B-106

E-79

**BCC-14 TYPE MOLDS**

**Horizontal Parallel through Cables**

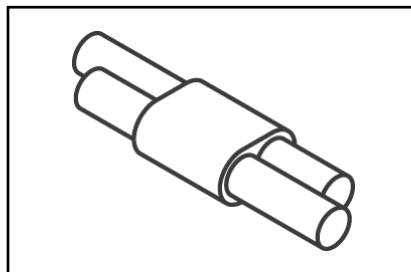

BCC-14 Type Molds are used to join horizontal parallel through run cables. Cables run side by side in the mold. Size range is #8 through #6 solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed.

Cable		Mold Number	Price Key	Weld Metal
Run	Tap			
#8	#8	<b>B-5709</b>	18	15
#6	#6	<b>B-5618</b>	18	25


**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®
- Sold complete with handles

Blue highlighted items are industry standard and most frequently ordered.

## BCC-7 TYPE MOLDS

### Horizontal Parallel through Cables

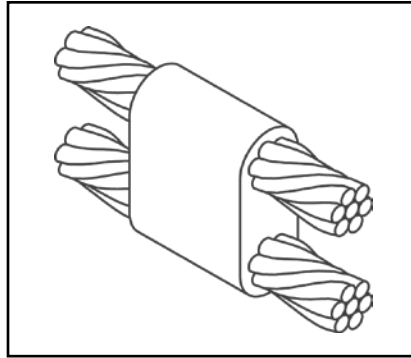

BCC-7 Type Molds are used to join horizontal parallel through run cables. One cable runs above the other cable in the mold. Size range is #6 through 4/0 solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-80

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
#4	#4	<b>B-1311</b>	4	32	B-106
	#6	<b>B-5627</b>	4	32	B-106
	#6 Sol	<b>B-8882</b>	4	32	B-106
	#8	<b>B-5629</b>	4	32	B-106
	#8 Sol	<b>B-5630</b>	4	32	B-106
#2	#2	<b>B-1313</b>	4	65	B-106
	#4	<b>B-1314</b>	4	65	B-106
	#6	<b>B-5631</b>	4	45	B-106
	#6 Sol	<b>B-5632</b>	4	45	B-106
	#8	<b>B-5634</b>	4	45	B-106
	#8 Sol	<b>B-5635</b>	4	45	B-106
#1	#1	<b>B-1315</b>	4	65	B-106
	#2	<b>B-1316</b>	4	65	B-106
	#4	<b>B-1317</b>	4	65	B-106
	#6	<b>B-5636</b>	4	65	B-106
	#6 Sol	<b>B-5637</b>	4	65	B-106
	#8	<b>B-5638</b>	4	45	B-106
	#8 Sol	<b>B-5639</b>	4	45	B-106
1/0	1/0	<b>B-1318</b>	4	90	B-106
	#1	<b>B-1319</b>	4	65	B-106
	#2	<b>B-1320</b>	4	65	B-106
	#4	<b>B-1321</b>	4	65	B-106
	#6	<b>B-5642</b>	4	65	B-106
	#6 Sol	<b>B-1208</b>	4	65	B-106
	#8	<b>B-5644</b>	4	65	B-106
	#8 Sol	<b>B-5645</b>	4	65	B-106


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Run	Tap				
2/0	2/0	<b>B-1322</b>	4	115	B-106
	1/0	<b>B-1323</b>	4	115	B-106
	#1	<b>B-1324</b>	4	90	B-106
	#2	<b>B-1325</b>	4	90	B-106
	#4	<b>B-5659</b>	4	90	B-106
	#6	<b>B-5342</b>	4	90	B-106
	#6 Sol	<b>B-5652</b>	4	90	B-106
	#8	<b>B-5668</b>	4	65	B-106
3/0	#8 Sol	<b>B-5943</b>	4	65	B-106
	3/0	<b>B-1326</b>	4	150	B-106
	2/0	<b>B-1327</b>	4	150	B-106
	1/0	<b>B-1328</b>	4	115	B-106
	#1	<b>B-1329</b>	4	115	B-106
	#2	<b>B-1330</b>	4	115	B-106
	#4	<b>B-6046</b>	4	115	B-106
	#6	<b>B-5676</b>	4	90	B-106
	#6 Sol	<b>B-5679</b>	4	90	B-106
	#8	<b>B-5680</b>	4	90	B-106
4/0	#8 Sol	<b>B-5682</b>	4	90	B-106
	4/0	<b>B-1331</b>	4	200	B-106
	3/0	<b>B-1332</b>	4	200	B-106
	2/0	<b>B-1333</b>	4	150	B-106
	1/0	<b>B-1334</b>	4	150	B-106
	#1	<b>B-1335</b>	4	150	B-106
	#2	<b>B-1336</b>	4	150	B-106
	#4	<b>B-5340</b>	4	150	B-106
	#6	<b>B-5684</b>	4	90	B-106
	#6 Sol	<b>B-6552</b>	4	90	B-106
	#8	<b>B-5686</b>	4	90	B-106
	#8 Sol	<b>B-5688</b>	4	90	B-106

Blue highlighted items are industry standard and most frequently ordered.



TYPE BCR-1 MOLDS

Horizontal Cable Terminal  
to Ground Rod

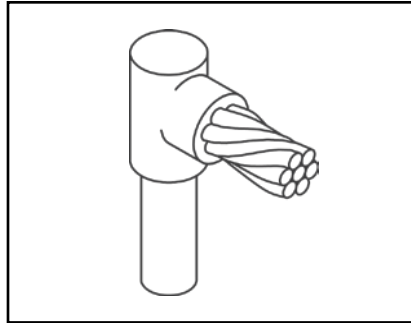

Type BCR-1 Molds are used to terminate horizontal copper cable at the top of a vertical ground rod. Size range is #6 through 1000 kcmil solid or concentric stranded copper conductors; 1/2" through 1" for the ground rod. Contact BURNDY® for information on molds for conductors not listed below.

NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

Required Tools:

Handle Clamps - see chart for correct handle catalog number

Recommended Accessories:

B38-0309-00 Flint Ignitor; B38-3922-00 Mold Cleaning Brush; B38-0135-00 Cable Cleaning Brush; B38-0330-00 Cable Clamp

E-81

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
1/2"	#6	B-8402	18 ①	25	Incl.
	#4	B-8403	18 ①	25	Incl.
	#2	B-495	4	65	B-106
	#1	B-496	4	65	B-106
	1/0	B-497	4	90	B-106
	2/0	B-498	4	90	B-106
	3/0	B-499	4	90	B-106
	4/0	B-500	4	90	B-106
	250 kcmil	B-501	4	90	B-106
	300 kcmil	B-502	4	90	B-106
5/8"	#6	B-8414	18 ①	32	Incl.
	#4	B-8415	18 ①	32	Incl.
	#2	B-503	4	65	B-106
	#1	B-504	4	65	B-106
	1/0	B-505	4	90	B-106
	2/0	B-506	4	90	B-106
	3/0	B-507	4	90	B-106
	4/0	B-508	4	90	B-106
	250 kcmil	B-509	4	90	B-106
	300 kcmil	B-510	4	115	B-106
	350 kcmil	B-511	4	115	B-106
	500 kcmil	B-513	4	150	B-106


① B38-0309-00 Flint ignitor included

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
3/4"	#6	B-8422	18 ①	32	Incl.
	#4	B-8426	19 ①	45	Incl.
	#2	B-5781	4	90	B-106
	#1	B-514	4	90	B-106
	1/0	B-515	4	90	B-106
	2/0	B-516	4	90	B-106
	3/0	B-517	4	90	B-106
	4/0	B-518	4	90	B-106
	250 kcmil	B-519	4	90	B-106
	300 kcmil	B-520	4	115	B-106
	350 kcmil	B-521	4	115	B-106
	500 kcmil	B-523	4	150	B-106
	750 kcmil	B-524	4	250	B-106
	1"	1/0	B-525	4	150
2/0		B-526	4	150	B-106
3/0		B-527	4	150	B-106
4/0		B-528	4	150	B-106
250 kcmil		B-529	4	150	B-106
300 kcmil		B-530	4	200	B-106
350 kcmil		B-531	4	200	B-106
500 kcmil		B-533	4	200	B-106
750 kcmil		B-534	4	250	B-106
1000 kcmil		B-535	5	2-150	B-106

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCR-2 MOLDS

### Horizontal Cable to Ground Rod

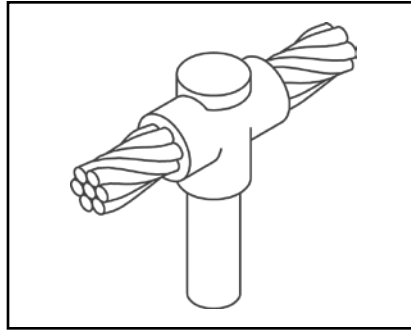

Type BCR-2 Molds are used to join horizontal through copper cable to the top of a vertical ground rod. Size range is #6 through 1000 kcmil solid or concentric stranded copper conductors; 1/2" through 1" for the ground rod. Contact BURNDY® for information on molds for conductors not listed below.

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-82

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
1/2"	#6	<b>B-8434</b>	18 ①	32	Incl.
	#4	<b>B-8435</b>	18 ①	32	Incl.
	#2	<b>B-537</b>	4	90	B-106
	#1	<b>B-538</b>	4	90	B-106
	1/0	<b>B-539</b>	4	90	B-106
	2/0	<b>B-540</b>	4	90	B-106
	3/0	<b>B-541</b>	4	115	B-106
	4/0	<b>B-542</b>	4	115	B-106
	250 kcmil	<b>B-543</b>	4	150	B-106
	300 kcmil	<b>B-544</b>	4	200	B-106
5/8"	#6	<b>B-8441</b>	18 ①	32	Incl.
	#4	<b>B-8442</b>	18 ①	32	Incl.
	#2	<b>B-545</b>	4	90	B-106
	#1	<b>B-546</b>	4	90	B-106
	1/0	<b>B-547</b>	4	90	B-106
	2/0	<b>B-548</b>	4	115	B-106
	3/0	<b>B-549</b>	4	115	B-106
	4/0	<b>B-550</b>	4	115	B-106
	250 kcmil	<b>B-551</b>	4	150	B-106
	300 kcmil	<b>B-552</b>	4	200	B-106
	350 kcmil	<b>B-553</b>	4	200	B-106
	500 kcmil	<b>B-555</b>	4	250	B-106


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
3/4"	#6	<b>B-8452</b>	19 ①	45	Incl.
	#4	<b>B-8454</b>	19 ①	65	Incl.
	#2	<b>B-556</b>	4	90	B-106
	#1	<b>B-557</b>	4	90	B-106
	1/0	<b>B-558</b>	4	115	B-106
	2/0	<b>B-559</b>	4	115	B-106
	3/0	<b>B-560</b>	4	115	B-106
	4/0	<b>B-561</b>	4	115	B-106
	250 kcmil	<b>B-562</b>	4	150	B-106
	300 kcmil	<b>B-563</b>	4	200	B-106
	350 kcmil	<b>B-564</b>	4	200	B-106
	500 kcmil	<b>B-566</b>	4	250	B-106
	750 kcmil	<b>B-567</b>	5	2-200	B-107
	1"	1/0	<b>B-569</b>	4	150
2/0		<b>B-570</b>	4	150	B-106
3/0		<b>B-571</b>	4	150	B-106
4/0		<b>B-572</b>	4	150	B-106
250 kcmil		<b>B-573</b>	4	200	B-106
300 kcmil		<b>B-574</b>	4	200	B-106
350 kcmil		<b>B-575</b>	4	200	B-106
500 kcmil		<b>B-577</b>	4	250	B-106
750 kcmil		<b>B-578</b>	5	2-200	B-107
1000 kcmil		<b>B-579</b>	5	500	B-107

① B38-0309-00 Flint ignitor included

Blue highlighted items are industry standard and most frequently ordered.

**TYPE BCR-3 MOLDS**

**Horizontal Through Cable to Ground Rod**

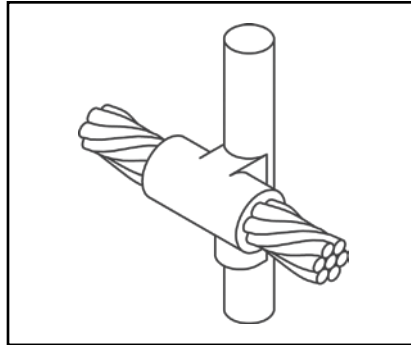

Type BCR-3 Molds are used to join horizontal through run cable to the side of a vertical ground rod. Size range is #6 through 1000 kcmil solid or concentric stranded copper conductors; 1/2" through 1" for the ground rod. Contact BURNDY® for information on molds for conductors not listed below.

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-83

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
1/2"	#6	B-5321	24	65	B-106
	#4	B2154	24	90	B-106
	#2	B-2155	24	90	B-106
	#1	B-2156	24	115	B-106
	1/0	B-1581	24	115	B-106
	2/0	B-1582	24	115	B-106
	4/0	B-1583	24	150	B-106
	250 kcmil	B-1584	24	150	B-106
5/8"	#6	B-5660	24	65	B-106
	#4	B-2157	24	90	B-106
	#2	B-2158	24	90	B-106
	#1	B-2159	24	115	B-106
	1/0	B-1586	24	115	B-106
	2/0	B-1587	24	115	B-106
	4/0	B-1588	24	150	B-106
	250 kcmil	B-1589	24	150	B-106
	500 kcmil	B-1593	13	2-200	B-107


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
3/4"	#6	B-6630	24	65	B-106
	#4	B-2160	24	90	B-106
	#2	B-2161	24	90	B-106
	#1	B-2162	24	115	B-106
	1/0	B-1594	24	115	B-106
	2/0	B-1595	24	115	B-106
	4/0	B-1596	24	150	B-106
	250 kcmil	B-1597	24	200	B-106
	500 kcmil	B-1601	13	500	B-107
	750 kcmil	B-1602	13	3-250	B-107
1"	#6	B-6906	24	90	B-106
	#4	B-2163	24	90	B-106
	#2	B-2164	24	90	B-106
	#1	B-2165	24	115	B-106
	1/0	B-1603	24	115	B-106
	2/0	B-1604	24	115	B-106
	4/0	B-1605	24	150	B-106
	250 kcmil	B-1606	24	200	B-106
	500 kcmil	B-1610	13	500	B-107
	750 kcmil	B-1611	13	3-250	B-107

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCR-17 MOLDS

### Horizontal Run and Tap Cables to Ground Rod

Type BCR-17 Molds are used to join horizontal run and tap cables to the top of a vertical ground rod. Size range is #4 through 750 kcmil solid or concentric stranded copper conductors; 1/2" through 1" for the ground rod. Contact BURNDY® for information on molds for conductors not listed below.

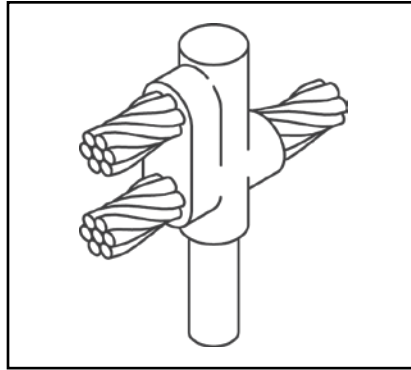

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-84

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
1/2"	#4	<b>B-5416</b>	4	90	B-106
	#2	<b>B-6165</b>	4	90	B-106
	#1	<b>B-5830</b>	4	90	B-106
	1/0	<b>B-5940</b>	4	115	B-106
	2/0	<b>B-5850</b>	4	150	B-106
	3/0	<b>B-5833</b>	4	200	B-106
	4/0	<b>B-5380</b>	4	200	B-106
	5/8"	#4	<b>B-5972</b>	4	90
#2		<b>B-5935</b>	4	115	B-106
#1		<b>B-5699</b>	4	115	B-106
1/0		<b>B-5746</b>	4	150	B-106
2/0		<b>B-5963</b>	4	200	B-106
3/0		<b>B-5734</b>	4	250	B-106
4/0		<b>B-5732</b>	4	250	B-106
250 kcmil		<b>B-5722</b>	5	2-150	B-107
3/4"	#4	<b>B-5698</b>	4	90	B-106
	#2	<b>B-5294</b>	4	115	B-106
	#1	<b>B-5390</b>	4	115	B-106
	1/0	<b>B-6025</b>	4	150	B-106
	2/0	<b>B-5738</b>	4	200	B-106
	3/0	<b>B-6003</b>	4	250	B-106
	4/0	<b>B-2566</b>	4	250	B-106
	250 kcmil	<b>B-5904</b>	5	2-150	B-107
	300 kcmil	<b>B-5857</b>	5	2-200	B-107
	350 kcmil	<b>B-5777</b>	5	2-200	B-107
500 kcmil	<b>B-5961</b>	5	3-200	B-107	


Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod	Tap				
1"	#4	<b>B-5556</b>	4	115	B-106
	#2	<b>B-5555</b>	4	150	B-106
	#1	<b>B-6048</b>	4	150	B-106
	1/0	<b>B-5992</b>	4	200	B-106
	2/0	<b>B-5877</b>	4	250	B-106
	3/0	<b>B-5821</b>	5	2-150	B-107
	4/0	<b>B-5820</b>	5	2-150	B-107
	250 kcmil	<b>B-5807</b>	5	2-200	B-107
	300 kcmil	<b>B-5803</b>	5	500	B-107
	350 kcmil	<b>B-5561</b>	5	500	B-107
	500 kcmil	<b>B-5515</b>	6	3-250	B-107
	750 kcmil	<b>B-5513</b>	6	2-500	B-107

Blue highlighted items are industry standard and most frequently ordered.

**TYPE BCR-24 MOLDS**

**Horizontal Parallel Run Cables to Ground Rod**

Type BCR-24 Molds are used to join horizontal parallel cables to the top of a vertical ground rod. Size range is #4 through 750 kcmil solid or concentric stranded copper conductors; 1/2" through 1" for the ground rod. Contact BURNDY® for information on molds for conductors not listed below.

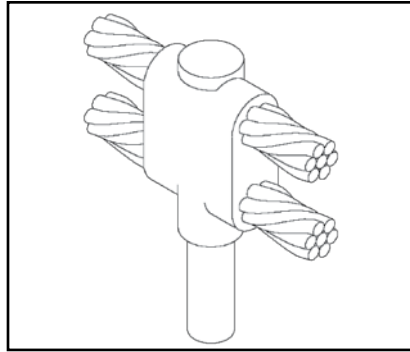

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-85

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod Size	Tap				
1/2"	#4	<b>B-5640</b>	4	115	B-106
	#2	<b>B-5667</b>	4	115	B-106
	#1	<b>B-6002</b>	4	115	B-106
	1/0	<b>B-5767</b>	4	150	B-106
	2/0	<b>B-5604</b>	4	200	B-106
	3/0	<b>B-5560</b>	4	250	B-106
	4/0	<b>B-6766</b>	4	250	B-106
	5/8"	#4	<b>B-6208</b>	4	115
#2		<b>B-5702</b>	4	150	B-106
#1		<b>B-5517</b>	4	150	B-106
1/0		<b>B-5573</b>	4	200	B-106
2/0		<b>B-8451</b>	4	250	B-106
3/0		<b>B-2510</b>	5	2-150	B-107
4/0		<b>B-5428</b>	5	2-150	B-107
250 kcmil		<b>B-1212</b>	5	2-200	B-107
300 kcmil		<b>B-2084</b>	5	500	B-107
350 kcmil		<b>B-2558</b>	5	500	B-107
500 kcmil	<b>B-2450</b>	5	3-250	B-107	
3/4"	#4	<b>B-8011</b>	4	115	B-106
	#2	<b>B-2320</b>	4	150	B-106
	#1	<b>B-2235</b>	4	150	B-106
	1/0	<b>B-6051</b>	4	200	B-106
	2/0	<b>B-8802</b>	4	250	B-106
	3/0	<b>B-8726</b>	5	2-150	B-107
	4/0	<b>B-5677</b>	5	2-150	B-107
	250 kcmil	<b>B-8461</b>	5	2-200	B-107
	300 kcmil	<b>B-8428</b>	5	500	B-107
	350 kcmil	<b>B-8294</b>	5	500	B-107
	500 kcmil	<b>B-8214</b>	5	3-250	B-107
	750 kcmil	<b>B-8027</b>	6	2-500	B-107

Cable		Mold Number	Price Key	Weld Metal	Handle Clamps
Grd Rod Size	Tap				
1"	#4	<b>B-5330</b>	4	150	B-106
	#2	<b>B-5332</b>	4	200	B-106
	#1	<b>B-5333</b>	4	200	B-106
	1/0	<b>B-5334</b>	4	250	B-106
	2/0	<b>B-5335</b>	5	2-150	B-107
	3/0	<b>B-5336</b>	5	2-200	B-107
	4/0	<b>B-5337</b>	5	2-200	B-107
	250 kcmil	<b>B-5338</b>	5	500	B-107
	300 kcmil	<b>B-5341</b>	5	3-200	B-107
	350 kcmil	<b>B-5351</b>	5	3-200	B-107
	500 kcmil	<b>B-5352</b>	6	2-500	B-107
	750 kcmil	<b>B-5353</b>	64	5-250	B-107

Blue highlighted items are industry standard and most frequently ordered.

## SINGLE SHOT MOLDS





RUS Accepted

BURNDYWeld® Single Shot Molds are an economical way to make cable connections onto the top of a ground rod. The Single Shot is a disposable single use ceramic mold that comes complete with everything required except the Flint Ignitor.

\* UL Listed

E-86


Ground Rod Size	Cable Size		Mold Number	Type
	Solid	Stranded		
1/2"	#6, #8	#8	BS-2009	BCR-1*
	#3, #4	#4, #6	BS-2010	BCR-1*
	#1, #2	#2, #3	BS-2011	BCR-1*
	#6, #8	#8	BS-2024	BCR-2*
	#3, #4	#4, #6	BS-2025	BCR-2*
	#1, #2	#2, #3	BS-2026	BCR-1*
5/8"	#6, #8	#8	BS-2012	BCR-1*
	#3, #4	#4, #6	BS-2013	BCR-1*
	#1, #2	#2, #3	BS-2014	BCR-1*
	2/0, 1/0	1/0, #1	BS-2015	BCR-1*
	—	2/0	BS-2016	BCR-1*
	#6, #8	#8	BS-2027	BCR-2*
	#3, #4	#4, #6	BS-2028	BCR-2*
	#1, #2	#2, #3	BS-2029	BCR-2*
	2/0, 1/0	1/0, #1	BS-2030	BCR-2*
	#6, #8	#8	BS-2105	BCR-24
	#3, #4	#4, #6	BS-2106	BCR-14
	#1, #2	#2, #3	BS-2107	BCR-24
	#6, #8	#8	BS-2006	BCR-25
	#3, #4	#4, #6	BS-2007	BCR-25
#1, #2	#2, #3	BS-2008	BCR-25	
3/4"	#6, #8	#8	BS-2017	BCR-1
	#3, #4	#4, #6	BS-2018	BCR-1*
	#1, #2	#2, #3	BS-2019	BCR-1*
	2/0, 1/0	1/0, #1	BS-2020	BCR-1*
	—	2/0	BS-2021	BCR-1*
	#6, #8	#8	BS-2031	BCR-2*
	#3, #4	#4, #6	BS-2032	BCR-2*
	#1, #2	#2, #3	BS-2033	BCR-2*
	2/0, 1/0	1/0, #1	BS-2034	BCR-2*
	#6, #8	#8	BS-2108	BCR-24
	#3, #4	#4, #6	BS-2109	BCR-24
	#1, #2	#2, #3	BS-2110	BCR-24
	#6, #8	#8	BS-2068	BCR-25*
	#3, #4	#4, #6	BS-2069	BCR-25*
	#1, #2	#2, #3	BS-2070	BCR-25*

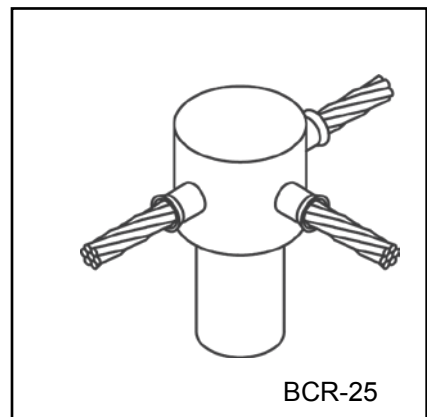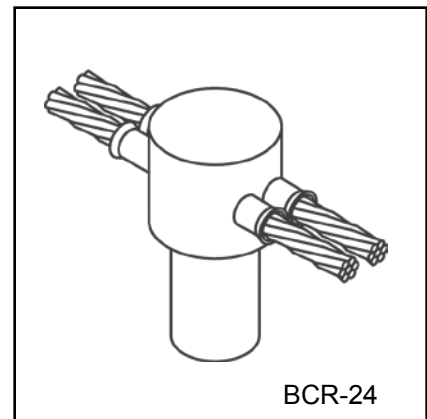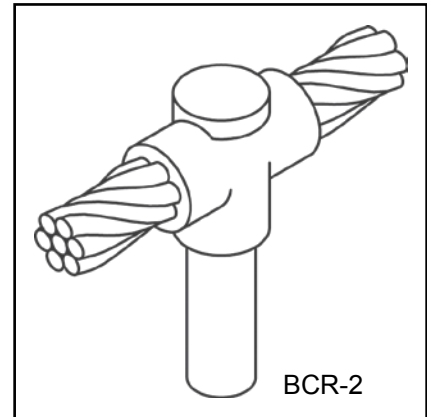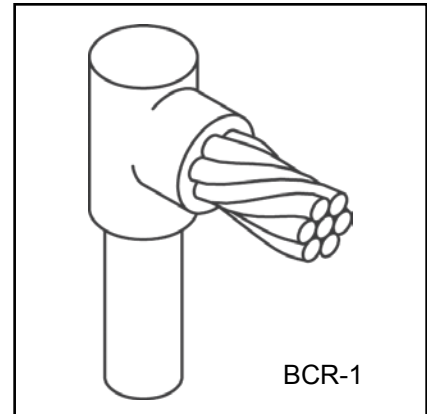

Blue highlighted items are industry standard and most frequently ordered.

**TYPE BCS-1 MOLDS**

**Horizontal Cable to  
Horizontal Steel Surface**

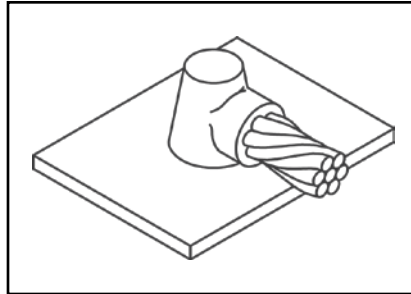

Type BCS-1 Molds are used to terminate a horizontal copper cable to any horizontal steel surface. Note that the cable is OFF the surface. Size range is 1/0 through 1000 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number


**Recommended Accessories:**

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
1/0	<b>B-644</b>	4	90	B-106
2/0	<b>B-645</b>	4	90	B-106
3/0	<b>B-646</b>	4	115	B-106
4/0	<b>B-647</b>	4	115	B-106
250 kcmil	<b>B-648</b>	4	115	B-106
300 kcmil	<b>B-649</b>	4	150	B-106
350 kcmil	<b>B-650</b>	4	200	B-106
500 kcmil	<b>B-652</b>	4	200	B-106
750 kcmil	<b>B-653</b>	5	2-150	B-106
1000 kcmil	<b>B-654</b>	5	2-200	B-107

**TYPE BCS-8 MOLDS**

**Horizontal Cable to  
Horizontal Steel Surface**

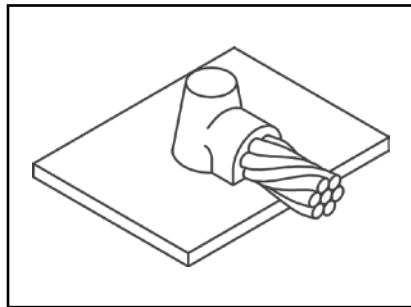

Type BCS-8 Molds are used to terminate a horizontal copper cable to any horizontal steel surface. Note that the cable is ON the surface. Size range is #6 through 1000 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

① **B38-0309-00** Flint ignitor included


Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	<b>B-628</b>	3 ①	45	Incl.
#4	<b>B-629</b>	3 ①	45	Incl.
#2	<b>B-630</b>	3 ①	45	Incl.
#1	<b>B-631</b>	3 ①	65	Incl.
1/0	<b>B-7146</b>	4	90	B-106
2/0	<b>B-7075</b>	4	90	B-106
3/0	<b>B-2199</b>	4	115	B-106
4/0	<b>B-6114</b>	4	115	B-106
250 kcmil	<b>B-2200</b>	4	115	B-106
300 kcmil	<b>B-2506</b>	4	150	B-106
350 kcmil	<b>B-2507</b>	4	200	B-106
500 kcmil	<b>B-2509</b>	4	200	B-106
750 kcmil	<b>B-2542</b>	5	2-150	B-107
1000 kcmil	<b>B-2511</b>	5	2-200	B-107

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCS-2 MOLDS

### Horizontal Through Cable to Horizontal Steel Surface

Type BCS-2 Molds are used to join horizontal through copper cable to any horizontal steel surface. Note the cable is OFF the surface. Size range is 1/0 through 1000 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

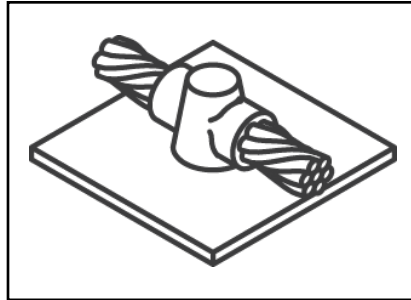

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp


Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
1/0	<b>B-616</b>	4	90	B-106
2/0	<b>B-617</b>	4	115	B-106
3/0	<b>B-618</b>	4	115	B-106
4/0	<b>B-619</b>	4	150	B-106
250 kcmil	<b>B-620</b>	4	150	B-106
300 kcmil	<b>B-621</b>	4	200	B-106
350 kcmil	<b>B-622</b>	4	250	B-106
500 kcmil	<b>B-624</b>	5	2-150	B-107
750 kcmil	<b>B-625-H</b>	5	3-250	B-107
1000 kcmil	<b>B-626-H</b>	5	2-500	B-107

E-88

## TYPE BCS-9 MOLDS

### Horizontal Through Cable to Horizontal Steel Surface

Type BCS-9 Molds are used to join horizontal through copper cable to any horizontal steel surface. Note the cable is ON the surface. Size range is #6 through 500 kcmil solid or concentric stranded copper conductors. Contact BURNDY® Products for information on molds for conductors not listed below.

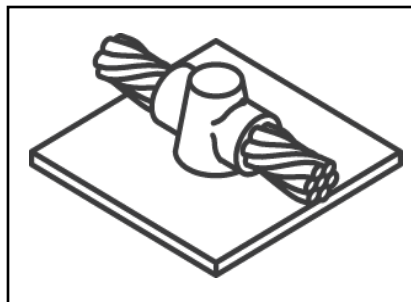

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

① **B38-0309-00** Flint ignitor included

Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	<b>B-602</b>	3 ①	45	Incl.
#4	<b>B-603</b>	3 ①	45	Incl.
#2	<b>B-604</b>	3 ①	45	Incl.
#1	<b>B-605</b>	3 ①	65	Incl.
1/0	<b>B-8379</b>	4	90	B-106
2/0	<b>B-5331</b>	4	115	B-106
3/0	<b>B-8381</b>	4	115	B-106
4/0	<b>B-7192</b>	4	150	B-106
250 kcmil	<b>B-8413</b>	4	150	B-106
300 kcmil	<b>B-8423</b>	4	200	B-106
350 kcmil	<b>B-8410</b>	4	250	B-106
500 kcmil	<b>B-5065</b>	5	2-150	B-107



Blue highlighted items are industry standard and most frequently ordered.



**TYPE BCS-3 MOLDS**

**Angular Cable Drop to Vertical  
Steel Surface**

Type BCS-3 Molds are used to join the end of a copper cable at a 45° angle to a vertical steel surface. Size range is #6 through 1000 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

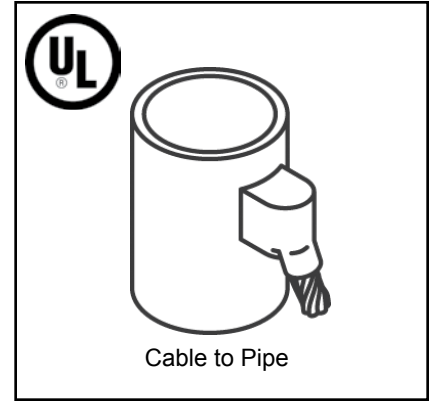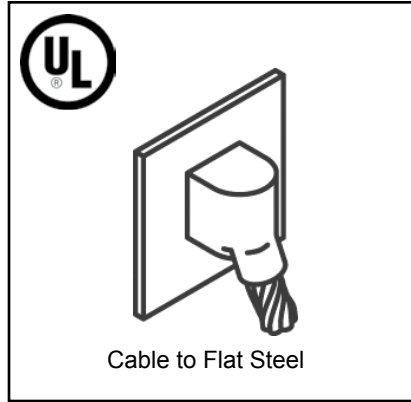

E-89

Cable Size	Pipe Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	Flat Steel Only	<b>B-585</b>	4	45	B-106
#4	12" & up	<b>B-586</b> ①	4	45	B-106
#3	Flat Steel Only	<b>B-587</b>	4	45	B-106
#2	12" & up	<b>B-588</b> ①	4	45	B-106
#1	12" & up	<b>B-589</b> ①	4	65	B-106
1/0	12" & up	<b>B-590</b> ①	4	90	B-106
2/0	12" & up	<b>B-591</b> ①	4	90	B-106
3/0	12" & up	<b>B-592</b> ①	4	115	B-106
4/0	12" & up	<b>B-593</b> ①	4	115	B-106
250 kcmil	Flat Steel Only	<b>B-594</b>	4	115	B-106
300 kcmil	Flat Steel Only	<b>B-595</b>	4	150	B-106
350 kcmil	Flat Steel Only	<b>B-596</b>	4	200	B-106
500 kcmil	Flat Steel Only	<b>B-598</b>	4	200	B-106
750 kcmil	Flat Steel Only	<b>B-599</b>	5	2-150	B-106
1000 kcmil	Flat Steel Only	<b>B-600</b>	5	2-200	B-106
#4	1-1/4" to 4"	<b>B-2476</b>	4	45	B-106
#4	4" to 6"	<b>B-2477</b>	4	45	B-106
#4	6" to 10"	<b>B-2478</b>	4	45	B-106
#2 Sol	1-1/4" to 4"	<b>B-9233-S</b>	4	45	B-106
#2 Sol	4" to 6"	<b>B-2480-S</b>	4	45	B-106
#2 Sol	6" to 10"	<b>B-2583-S</b>	4	45	B-106
#2 Sol	12" & up	<b>B-588-S</b> ①	4	45	B-106
#2	1-1/4" to 4"	<b>B-9233</b>	4	45	B-106
#2	4" to 6"	<b>B-2480</b>	4	45	B-106
#2	6" to 10"	<b>B-2583</b>	4	45	B-106
#1	1-1/4" to 4"	<b>B-2482</b>	4	65	B-106
#1	4" to 6"	<b>B-2483</b>	4	65	B-106
#1	6" to 10"	<b>B-2484</b>	4	65	B-106
1/0	1-1/4" to 4"	<b>B-2486</b>	4	90	B-106
1/0	4" to 6"	<b>B-2487</b>	4	90	B-106
1/0	6" to 10"	<b>B-2488</b>	4	90	B-106

Cable Size	Pipe Size	Mold Number	Price Key	Weld Metal	Handle Clamps
2/0	1-1/4" to 4"	<b>B-8833</b>	4	90	B-106
2/0	4" to 6"	<b>B-2490</b>	4	90	B-106
2/0	6" to 10"	<b>B-2491</b>	4	90	B-106
3/0	1-1/4" to 4"	<b>B-2493</b>	4	115	B-106
3/0	4" to 6"	<b>B-2494</b>	4	115	B-106
3/0	6" to 10"	<b>B-2495</b>	4	115	B-106
4/0	1-1/4" to 4"	<b>B-9021</b>	4	115	B-106
4/0	4" to 6"	<b>B-2497</b>	4	115	B-106
4/0	6" to 10"	<b>B-2498</b>	4	115	B-106

① Flat Surface Mold; These items can be used to Flat Steel or to Pipe

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**


- B38-0309-00 Flint Ignitor
- B38-3922-00 Mold Cleaning Brush
- B38-0135-00 Cable Cleaning Brush
- B38-0330-00 Cable Clamp

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCS-23 MOLDS

### Vertical Cable Drop to Vertical Steel Surface

Type BCS-23 Molds are used to join vertical cable down to a vertical steel surface. Note that the cable is OFF the surface. Size range is #6 through 500 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

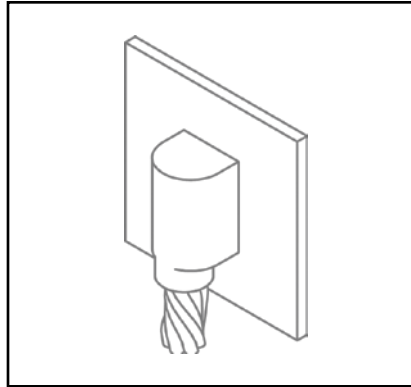

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp


E-90

Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	<b>B-5389</b>	4	45	B-106
#4	<b>B-5359</b>	4	65	B-106
#2	<b>B-2781</b>	4	65	B-106
#1	<b>B-5361</b>	4	90	B-106
1/0	<b>B-2189</b>	4	115	B-106
2/0	<b>B-2540</b>	4	115	B-106
3/0	<b>B-5362</b>	4	150	B-106
4/0	<b>B-8718</b>	4	150	B-106
250 kcmil	<b>B-8165</b>	4	200	B-106
300 kcmil	<b>B-5363</b>	4	200	B-106
350 kcmil	<b>B-9029</b>	4	250	B-106
500 kcmil	<b>B-8512</b>	17	2-150	B-106

## TYPE BCS-4 MOLDS

### Vertical Through Cable to Vertical Steel Surface

Type BCS-4 Molds are used to join a vertical through copper cable to a vertical steel surface. Note that the cable is OFF the surface. For molds with the cable on the surface, contact BURNDY®. Size range is #6 through 500 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed.

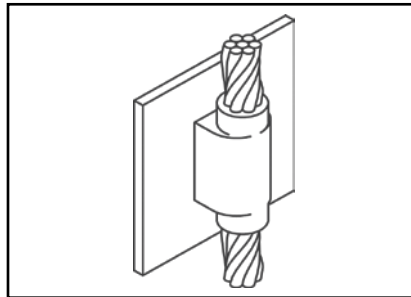

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:


**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	<b>B-1215</b>	4	90	B-106
#4	<b>B-1216</b>	4	90	B-106
#2	<b>B-1218</b>	4	115	B-106
#1	<b>B-1219</b>	4	115	B-106
1/0	<b>B-1220</b>	17	200	B-106
2/0	<b>B-1221</b>	17	200	B-106
3/0	<b>B-1222</b>	17	250	B-106
4/0	<b>B-1223</b>	17	250	B-106
250 kcmil	<b>B-1224</b>	17	250	B-106
300 kcmil	<b>B-1225-H</b>	6	500	B-107
350 kcmil	<b>B-1226-H</b>	6	3-200	B-107
500 kcmil	<b>B-1228-H</b>	6	3-250	B-107

Blue highlighted items are industry standard and most frequently ordered.

**TYPE BCS-6 MOLDS**

**Horizontal Through Cable to Vertical Steel Surface**

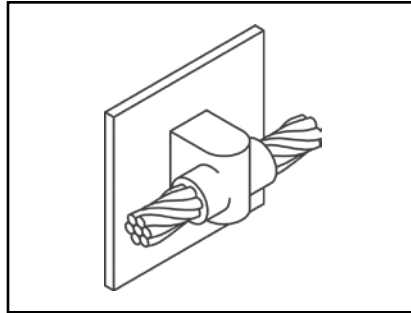

Type BCS-6 Molds are used to join horizontal through copper cable to a vertical steel surface. Note that the cable is OFF the surface. Size range is #6 through 250 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	<b>B-1626</b>	4	65	B-106
#4	<b>B-1627</b>	4	65	B-106
#2	<b>B-1628</b>	4	65	B-106
#1	<b>B-1629</b>	4	90	B-106
1/0	<b>B-1630</b>	4	115	B-106
2/0	<b>B-1631</b>	4	115	B-106
3/0	<b>B-1632</b>	4	150	B-106
4/0	<b>B-1633</b>	4	150	B-106
250 kcmil	<b>B-1634</b>	4	150	B-106

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number


**Recommended Accessories:**

- B38-0309-00** Flint Ignitor
- B38-3922-00** Mold Cleaning Brush
- B38-0135-00** Cable Cleaning Brush
- B38-0330-00** Cable Clamp

E-91

**TYPE BCS-7 MOLDS**

**Overhead Vertical Tap Cable to Vertical Steel Surface**

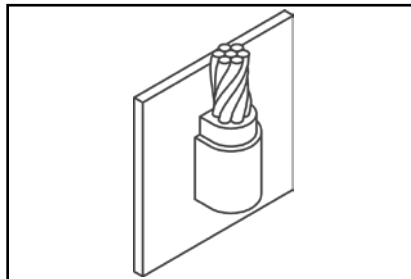

Type BCS-7 Molds are used to join an overhead vertical copper conductor drop tap to a vertical steel surface. Size range is #6 through 1000 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed.

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**

- B38-0309-00** Flint Ignitor
- B38-3922-00** Mold Cleaning Brush
- B38-0135-00** Cable Cleaning Brush
- B38-0330-00** Cable Clamp


Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	<b>B-1635</b>	4	65	B-106
#4	<b>B-1636</b>	4	65	B-106
#3	<b>B-1637</b>	4	65	B-106
#2	<b>B-1638</b>	4	65	B-106
#1	<b>B-1639</b>	4	90	B-106
1/0	<b>B-1640</b>	4	150	B-106
2/0	<b>B-1641</b>	4	150	B-106
3/0	<b>B-1642</b>	17	200	B-106
4/0	<b>B-1643</b>	17	200	B-106
250 kcmil	<b>B-1644</b>	17	200	B-106
300 kcmil	<b>B-1645</b>	17	250	B-106
350 kcmil	<b>B-1646</b>	6	2-150	B-107
500 kcmil	<b>B-1648</b>	6	2-200	B-107
750 kcmil	<b>B-1649</b>	6	500	B-107
1000 kcmil	<b>B-1650</b>	6	3-200	B-107

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCS-18 MOLDS

### Horizontal Tap Cable to Vertical Steel Surface

Type BCS-18 Molds are used to connect a horizontal conductor to a vertical steel surface. Note that the cable is ON the surface. Size range is #6 through 500 kcmil solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

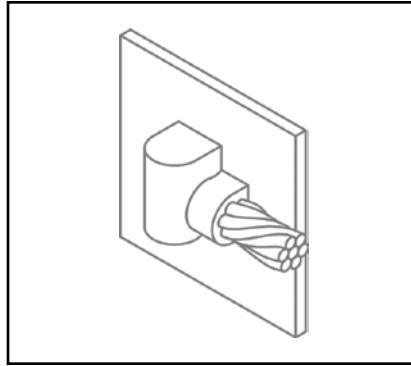

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor; **B38-3922-00** Mold Cleaning Brush; **B38-0135-00** Cable Cleaning Brush; **B38-0330-00** Cable Clamp

E-92


Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6	<b>B-5910</b>	4	45	B-106
#4	<b>B-2761</b>	4	45	B-106
#1	<b>B-6060</b>	4	65	B-106
1/0	<b>B-5419</b>	4	90	B-106
2/0	<b>B-2567</b>	4	90	B-106
3/0	<b>B-6072</b>	4	115	B-106
4/0	<b>B-9253</b>	4	115	B-106
250 kcmil	<b>B-2568</b>	4	115	B-106
300 kcmil	<b>B-6061</b>	4	150	B-106
350 kcmil	<b>B-6067</b>	4	200	B-106
500 kcmil	<b>B-8359</b>	4	200	B-106

## TYPE BCS-5 MOLDS

### Horizontal Cable Tap to Horizontal Cast Iron Surface

Type BCS-5 Molds are used to join horizontal cable taps to horizontal cast iron surfaces. Note that the cable is ON the surface. Size range is #6 through #1 solid or concentric stranded copper conductors. Contact BURNDY® for information on molds for conductors not listed below.

**DO NOT use Type BCS-5 molds on Soil Pipe (ASTM A74-82). A test weld should be made on a section of pipe being used to determine the possibility of detrimental metallurgical effects.**

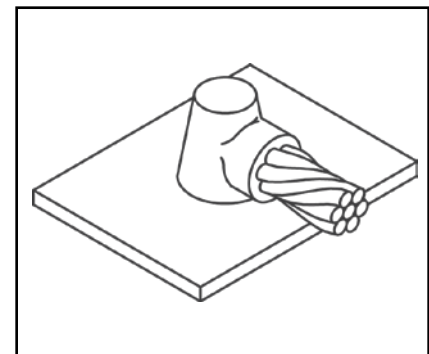

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor  
**B38-3922-00** Mold Cleaning Brush  
**B38-0135-00** Cable Cleaning Brush  
**B38-0330-00** Cable Clamp

Cable Size	Mold Number	Price Key	Weld Metal	Handle Clamps
#6 Sol	<b>B-1613</b>	3 ①	2SCI	Incl.
#6	<b>B-1614</b>	3 ①	25CI	Incl.
#4 Sol	<b>B-1615</b>	3 ①	45CI	Incl.
#4	<b>B-1616</b>	3 ①	45CI	Incl.
#2 Sol	<b>B-1617</b>	3 ①	45CI	Incl.
#2	<b>B-1618</b>	3 ①	45CI	Incl.
#1 Sol	<b>B-1619</b>	3 ①	65CI	Incl.
#1	<b>B-1620</b>	3 ①	65CI	Incl.


① B38-0309-00 Flint ignitor included

**Blue highlighted items are industry standard and most frequently ordered.**

**TYPE BCRE-1 MOLDS**

**Horizontal Parallel Tap to Rebar**

Type BCRE-1 Molds are recommended for parallel, horizontal connections for solid or concentric stranded conductors #6 through 4/0 joined to reinforcing bars #3 through #6 and larger. The high copper content joint has a higher current carrying capacity than the conductors being joined and is impervious to vibration and moisture. Contact BURNDY® for information on molds for conductors not listed below.

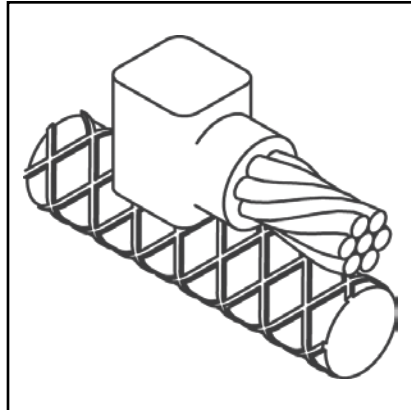

**PACKING MATERIAL NOTE**

A packing pad is necessary when making BURNDYWeld® connections to rebar. Packing material B38032900 is copper shim stock. Packing material numbers B38406100, B38406200 and B38406300 are a ceramic fiber material and can be used for one connection only. Be sure to specify packing material catalog number when ordering mold and weld metal.

E-93

Rebar Size	Cable Size	Mold Number	Packing Material	Price Key	Weld Metal	Handle Clamps
3	#6	<b>B-7500</b>	B38032900	4	25	B-106
	#4	<b>B-7501</b>	B38032900	4	32	B-106
	#2	<b>B-7502</b>	B38032900	4	45	B-106
	#1	<b>B-7503</b>	B38032900	4	65	B-106
	1/0	<b>B-7504</b>	B38032900	4	90	B-106
	2/0	<b>B-7505</b>	B38032900	4	90	B-106
	3/0	<b>B-7506</b>	B38032900	4	115	B-106
4 & Larger	4/0	<b>B-7507</b>	B38032900	4	115	B-106
	#6	<b>B-7508</b>	B38406100	3 ①	25	Incl.
	#4	<b>B-7509</b>	B38406100	3 ①	32	Incl.
	#2	<b>B-7510</b>	B38406100	3 ①	45	Incl.
4	#1	<b>B-7511</b>	B38406100	3 ①	65	Incl.
	1/0	<b>B-7512</b>	B38032900	4	90	B-106
	2/0	<b>B-7513</b>	B38032900	4	90	B-106
	3/0	<b>B-7514</b>	B38032900	4	115	B-106
	4/0	<b>B-7515</b>	B38032900	4	115	B-106
5	1/0	<b>B-7520</b>	B38032900	4	90	B-106
	2/0	<b>B-7521</b>	B38032900	4	90	B-106
	3/0	<b>B-7522</b>	B38032900	4	115	B-106
	4/0	<b>B-7523</b>	B38032900	4	115	B-106
6 & Larger	1/0	<b>B-7528</b>	B38406200	14+	90	Incl.
	2/0	<b>B-7529</b>	B38406200	14+	90	Incl.
	3/0	<b>B-7530</b>	B38406200	14+	115	Incl.
	4/0	<b>B-7531</b>	B38406200	14+	115	Incl.

① B38-0309-00 Flint ignitor included

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**


- B38-0309-00** Flint Ignitor
- B38-3922-00** Mold Cleaning Brush
- B38-0135-00** Cable Cleaning Brush
- B38-0330-00** Cable Clamp

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCRE-2 MOLDS

### Horizontal Cable Tap to Horizontal Rebar Run

Type BCRE-2 Molds are recommended for right angle, horizontal connections for solid or concentric stranded conductors #6 through 4/0 joined to reinforcing bars #3 through #6. The high copper content joint has a higher current carrying capacity than the conductors being joined and is impervious to vibration and moisture.

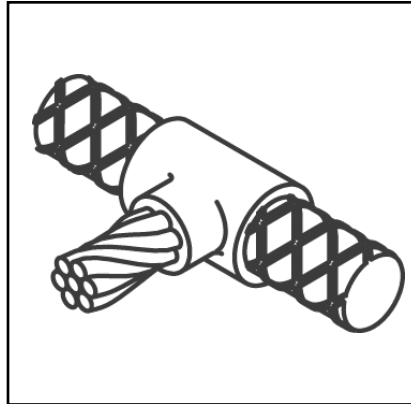

### PACKING MATERIAL NOTE

A packing pad is necessary when making BURNDYWeld® connections to rebar. Packing material B38032900 is copper shim stock. Packing material numbers B38406100, B38406200 and B38406300 are a ceramic fiber material and can be used for one connection only. Be sure to specify packing material catalog number when ordering mold and weld metal.

E-94

Rebar Size	Cable Size	Mold Number	Packing Material	Price Key	Weld Metal	Handle Clamps
3	#6	<b>B-7588</b>	B38032900	4	45	B-106
	#4	<b>B-7589</b>	B38032900	4	45	B-106
	#2	<b>B-7590</b>	B38032900	4	65	B-106
	#1	<b>B-7591</b>	B38032900	4	65	B-106
	1/0	<b>B-7592</b>	B38032900	4	90	B-106
	2/0	<b>B-7593</b>	B38032900	4	90	B-106
	3/0	<b>B-7594</b>	B38032900	4	115	B-106
	4/0	<b>B-7595</b>	B38032900	4	115	B-106
4	#6	<b>B-7596</b>	B38032900	4	45	B-106
	#4	<b>B-7597</b>	B38032900	4	45	B-106
	#2	<b>B-7598</b>	B38032900	4	65	B-106
	#1	<b>B-7599</b>	B38032900	4	65	B-106
	1/0	<b>B-7600</b>	B38032900	4	90	B-106
	2/0	<b>B-7601</b>	B38032900	4	90	B-106
	3/0	<b>B-7602</b>	B38032900	4	115	B-106
	4/0	<b>B-7603</b>	B38032900	4	115	B-106
5	#6	<b>B-7604</b>	B38032900	4	90	B-106
	#4	<b>B-7605</b>	B38032900	4	90	B-106
	#2	<b>B-7606</b>	B38032900	4	90	B-106
	#1	<b>B-7607</b>	B38032900	4	90	B-106
	1/0	<b>B-7608</b>	B38032900	4	115	B-106
	2/0	<b>B-7609</b>	B38032900	4	115	B-106
	3/0	<b>B-7610</b>	B38032900	4	150	B-106
	4/0	<b>B-7611</b>	B38032900	4	150	B-106
6	#6	<b>B-7612</b>	B38032900	4	90	B-106
	#4	<b>B-7613</b>	B38032900	4	90	B-106
	#2	<b>B-7614</b>	B38032900	4	90	B-106
	#1	<b>B-7615</b>	B38032900	4	90	B-106
	1/0	<b>B-7616</b>	B38032900	4	115	B-106
	2/0	<b>B-7617</b>	B38032900	4	115	B-106
	3/0	<b>B-7618</b>	B38032900	4	150	B-106
	4/0	<b>B-7619</b>	B38032900	4	150	B-106

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:


**B38-0309-00** Flint Ignitor  
**B38-3922-00** Mold Cleaning Brush  
**B38-0135-00** Cable Cleaning Brush  
**B38-0330-00** Cable Clamp

Blue highlighted items are industry standard and most frequently ordered.

**TYPE BCRE-3 MOLDS**

**Horizontal through Cable to  
Vertical Rebar**

Type BCRE-3 Molds are recommended for horizontal conductors to vertical rebar connections for solid or concentric stranded conductors #6 through 4/0 joined to reinforcing bars #3 through #7 & larger. The high copper content joint has a higher current carrying capacity than the conductors being joined and is impervious to vibration and moisture. Contact BURNDY® for information on molds for conductors not listed below.

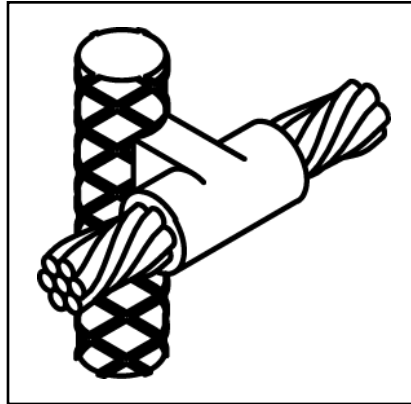

**PACKING MATERIAL NOTE**

A packing pad is necessary when making BURNDYWeld® connections to rebar. Packing material B38032900 is copper shim stock. Packing material numbers B38406100, B38406200 and B38406300 are a ceramic fiber material and can be used for one connection only. Be sure to specify packing material catalog number when ordering mold and weld metal.

E-95

Rebar Size	Cable Size	Mold Number	Packing Material	Price Key	Weld Metal	Handle Clamps
3	#6	<b>B-7620</b>	B38032900	24	90	B-106
	#4	<b>B-7621</b>	B38032900	24	90	B-106
	#2	<b>B-7622</b>	B38032900	24	90	B-106
	#1	<b>B-7623</b>	B38032900	24	115	B-106
	1/0	<b>B-7624</b>	B38032900	24	115	B-106
	2/0	<b>B-7625</b>	B38032900	24	115	B-106
	3/0	<b>B-7626</b>	B38032900	24	150	B-106
	4/0	<b>B-7627</b>	B38032900	24	150	B-106
4	#6	<b>B-7628</b>	B38032900	24	90	B-106
	#4	<b>B-7629</b>	B38032900	24	90	B-106
	#2	<b>B-7630</b>	B38032900	24	90	B-106
	#1	<b>B-7631</b>	B38032900	24	115	B-106
	1/0	<b>B-7632</b>	B38032900	24	115	B-106
	2/0	<b>B-7633</b>	B38032900	24	115	B-106
	3/0	<b>B-7634</b>	B38032900	24	150	B-106
	4/0	<b>B-7635</b>	B38032900	24	150	B-106
5	#6	<b>B-7636</b>	B38032900	24	90	B-106
	#4	<b>B-7637</b>	B38032900	24	90	B-106
	#2	<b>B-7638</b>	B38032900	24	90	B-106
	#1	<b>B-7639</b>	B38032900	24	115	B-106
	1/0	<b>B-7640</b>	B38032900	24	115	B-106
	2/0	<b>B-7641</b>	B38032900	24	115	B-106
	3/0	<b>B-7642</b>	B38032900	24	150	B-106
	4/0	<b>B-7643</b>	B38032900	24	150	B-106

Rebar Size	Cable Size	Mold Number	Packing Material	Price Key	Weld Metal	Handle Clamps
6	#6	<b>B-7644</b>	B38032900	24	90	B-106
	#4	<b>B-7645</b>	B38032900	24	90	B-106
	#2	<b>B-7646</b>	B38032900	24	90	B-106
	#1	<b>B-7647</b>	B38032900	24	115	B-106
	1/0	<b>B-7648</b>	B38032900	24	115	B-106
	2/0	<b>B-7649</b>	B38032900	24	115	B-106
	3/0	<b>B-7650</b>	B38032900	24	150	B-106
	4/0	<b>B-7651</b>	B38032900	24	150	B-106
7 & Larger	#6	<b>B-7652</b>	B38406300	4	90	B-106-41
	#4	<b>B-7653</b>	B38406300	4	90	B-106-41
	#2	<b>B-7654</b>	B38406300	4	90	B-106-41
	#1	<b>B-7655</b>	B38406300	4	115	B-106-41
	1/0	<b>B-7656</b>	B38406300	4	115	B-106-41
	2/0	<b>B-7657</b>	B38406300	4	115	B-106-41
	3/0	<b>B-7658</b>	B38406300	4	150	B-106-41
	4/0	<b>B-7659</b>	B38406300	4	150	B-106-41

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**


- B38-0309-00 Flint Ignitor
- B38-3922-00 Mold Cleaning Brush
- B38-0135-00 Cable Cleaning Brush
- B38-0330-00 Cable Clamp

Blue highlighted items are industry standard and most frequently ordered.

## TYPE BCRE-4 MOLDS

### Horizontal through Cable to Horizontal Rebar

Type BCRE-4 Molds are recommended for horizontal through conductors to horizontal rebar at right angle connections for solid or concentric stranded conductors #6 through 4/0 joined to reinforcing bars #3 through #6 & larger. The high copper content joint has a higher current carrying capacity than the conductors being joined and is impervious to vibration and moisture. Contact BURNDY® for information on molds for conductors not listed below.

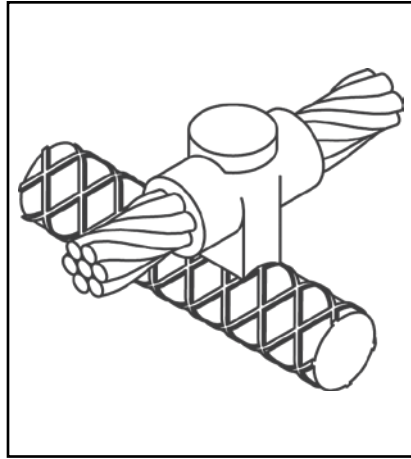

### PACKING MATERIAL NOTE

A packing pad is necessary when making BURNDYWeld® connections to rebar. Packing material B38032900 is copper shim stock. Packing material numbers B38406100, B38406200 and B38406300 are a ceramic fiber material and can be used for one connection only. Be sure to specify packing material catalog number when ordering mold and weld metal.

E-96

Rebar Size	Cable Size	Mold Number	Packing Material	Price Key	Weld Metal	Handle Clamps
3	#6	<b>B-7708</b>	B38032900	4	90	B-106
	#4	<b>B-7709</b>	B38032900	4	90	B-106
	#2	<b>B-7710</b>	B38032900	4	90	B-106
	#1	<b>B-7711</b>	B38032900	4	115	B-106
	1/0	<b>B-7712</b>	B38032900	22	115	B-106
	2/0	<b>B-7713</b>	B38032900	22	115	B-106
	3/0	<b>B-7714</b>	B38032900	22	150	B-106
	4/0	<b>B-7715</b>	B38032900	22	150	B-106
4	#6	<b>B-7716</b>	B38032900	4	90	B-106
	#4	<b>B-7717</b>	B38032900	4	90	B-106
	#2	<b>B-7718</b>	B38032900	4	90	B-106
	#1	<b>B-7719</b>	B38032900	22	115	B-106
	1/0	<b>B-7720</b>	B38032900	22	115	B-106
	2/0	<b>B-7721</b>	B38032900	22	115	B-106
	3/0	<b>B-7722</b>	B38032900	22	150	B-106
	4/0	<b>B-7723</b>	B38032900	22	150	B-106
5	#6	<b>B-7724</b>	B38032900	4	90	B-106
	#4	<b>B-7725</b>	B38032900	4	90	B-106
	#2	<b>B-7726</b>	B38032900	4	90	B-106
	#1	<b>B-7727</b>	B38032900	22	115	B-106
	1/0	<b>B-7728</b>	B38032900	22	115	B-106
	2/0	<b>B-7729</b>	B38032900	22	115	B-106
	3/0	<b>B-7730</b>	B38032900	22	150	B-106
	4/0	<b>B-7731</b>	B38032900	22	150	B-106
6 & Larger	#6	<b>B-7732</b>	B38406100	14 ①	90	Incl.
	#4	<b>B-7733</b>	B38406100	14 ①	90	Incl.
	#2	<b>B-7734</b>	B38406100	14 ①	90	Incl.
	#1	<b>B-7735</b>	B38406100	14 ①	115	Incl.
	1/0	<b>B-7736</b>	B38406200	14 ①	115	Incl.
	2/0	<b>B-7737</b>	B38406200	14 ①	115	Incl.
	3/0	<b>B-7738</b>	B38406200	14 ①	150	Incl.
	4/0	<b>B-7739</b>	B38406200	14 ①	150	Incl.

#### NOTES:

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

#### Required Tools:

Handle Clamps - see chart for correct handle catalog number

#### Recommended Accessories:

**B38-0309-00** Flint Ignitor  
**B38-3922-00** Mold Cleaning Brush  
**B38-0135-00** Cable Cleaning Brush  
**B38-0330-00** Cable Clamp

① B38-0309-00 Flint ignitor included


Blue highlighted items are industry standard and most frequently ordered.



**TYPE BCRE-6 MOLDS**

**Horizontal Cable Tap to  
Vertical Rebar**

Type BCRE-6 Molds are recommended for horizontal conductors terminating at right angles to vertical rebar connections for solid or concentric stranded conductors #6 through 4/0 joined to reinforcing bars #3 through #7 and larger. The high copper content joint has a higher current carrying capacity than the conductors being joined and is impervious to vibration and moisture.

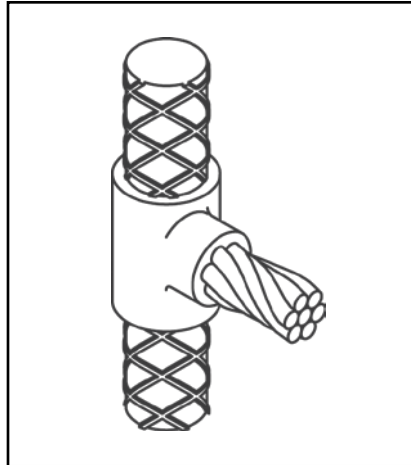

**PACKING MATERIAL NOTE**

A packing pad is necessary when making BURNDYWeld® connections to rebar. Packing material B38032900 is copper shim stock. Packing material numbers B38406100, B38406200 and B38406300 are a ceramic fiber material and can be used for one connection only. Be sure to specify packing material catalog number when ordering mold and weld metal.

E-97

Contact BURNDY® for information on molds for conductors not listed below.

Rebar Size	Cable Size	Mold Number	Packing Material	Price Key	Weld Metal	Handle Clamps
3	#6	<b>B-7884</b>	B38032900	4	90	B-106
	#4	<b>B-7885</b>	B38032900	4	90	B-106
	#2	<b>B-7886</b>	B38032900	4	90	B-106
	#1	<b>B-7887</b>	B38032900	4	115	B-106
	1/0	<b>B-7888</b>	B38032900	4	115	B-106
	2/0	<b>B-7889</b>	B38032900	4	115	B-106
	3/0	<b>B-7890</b>	B38032900	4	150	B-106
	4/0	<b>B-7891</b>	B38032900	4	150	B-106
4	#6	<b>B-7892</b>	B38032900	4	90	B-106
	#4	<b>B-7893</b>	B38032900	4	90	B-106
	#2	<b>B-7894</b>	B38032900	4	90	B-106
	#1	<b>B-7895</b>	B38032900	4	115	B-106
	1/0	<b>B-7896</b>	B38032900	4	115	B-106
	2/0	<b>B-7897</b>	B38032900	4	115	B-106
	3/0	<b>B-7898</b>	B38032900	4	150	B-106
	4/0	<b>B-7899</b>	B38032900	4	150	B-106
5	#6	<b>B-7900</b>	B38032900	4	90	B-106
	#4	<b>B-7901</b>	B38032900	4	90	B-106
	#2	<b>B-7902</b>	B38032900	4	90	B-106
	#1	<b>B-7903</b>	B38032900	4	115	B-106
	1/0	<b>B-7904</b>	B38032900	4	115	B-106
	2/0	<b>B-7905</b>	B38032900	4	115	B-106
	3/0	<b>B-7906</b>	B38032900	4	150	B-106
	4/0	<b>B-7907</b>	B38032900	4	150	B-106

Rebar Size	Cable Size	Mold Number	Packing Material	Price Key	Weld Metal	Handle Clamps
6	#6	<b>B-7908</b>	B38032900	4	90	B-106
	#4	<b>B-7909</b>	B38032900	4	90	B-106
	#2	<b>B-7910</b>	B38032900	4	90	B-106
	#1	<b>B-7911</b>	B38032900	4	115	B-106
	1/0	<b>B-7912</b>	B38032900	4	115	B-106
	2/0	<b>B-7913</b>	B38032900	4	115	B-106
	3/0	<b>B-7914</b>	B38032900	4	150	B-106
	4/0	<b>B-7915</b>	B38032900	4	150	B-106
7 & Larger	#6	<b>B-7916</b>	B38406300	4	90	B-106-32 ①
	#4	<b>B-7917</b>	B38406300	4	90	B-106-32 ①
	#2	<b>B-7918</b>	B38406300	4	90	B-106-32 ①
	#1	<b>B-7919</b>	B38406300	4	115	B-106-32 ①
	1/0	<b>B-7920</b>	B38406300	4	115	B-106-32 ①
	2/0	<b>B-7921</b>	B38406300	4	115	B-106-32 ①
	3/0	<b>B-7922</b>	B38406300	4	150	B-106-32 ①
	4/0	<b>B-7923</b>	B38406300	4	150	B-106-32 ①

① The **B106-32** comes complete with a **B-106** handle clamp and **B40-0106-76** vertical chain clamp. Although good for use on all sizes of rebar, vertical chain clamps are strongly recommended on large size rebar as they hold the mold to the rebar securely. If you already have a B-106 handle clamp, you can purchase the vertical chain clamps separately.

**NOTES:**

- For sizes not listed, contact BURNDY®
- Molds listed are for concentric stranded cable; add suffix "-S" to mold number for solid conductors
- For heavy duty molds, molds with wear plates or molds for Copperweld® cable, contact BURNDY®
- For expedited service, contact BURNDY®

**Required Tools:**

Handle Clamps - see chart for correct handle catalog number

**Recommended Accessories:**

- B38-0309-00 Flint Ignitor
- B38-3922-00 Mold Cleaning Brush
- B38-0135-00 Cable Cleaning Brush
- B38-0330-00 Cable Clamp

Blue highlighted items are industry standard and most frequently ordered.

## BURNDY® GROUNDMAX™

## BURNDY® GROUNDMAX™

BURNDY® GROUNDMAX™ is an economical solution for areas with very difficult grounding issues. BURNDY® GROUNDMAX™ is highly conductive in a wet or dry application and does not require moisture to lower the resistance of your grounding system. BURNDY® GROUNDMAX™ contains a corrosion inhibitor which forms a film on copper, creating a barrier against corrosion. BURNDY® GROUNDMAX™ can be poured in dry or pumped in slurry form. No tamping required. It is very contractor friendly. No special tools required.

### Advantages:

- Easy to install
- Electrically conductive
- Environmentally friendly
- Will not leach into the ground
- Positive low resistance, electrical connection to earth
- Does not contain any hazardous chemicals
- Compatible with all copper grounding systems
- Contains a corrosion inhibitor to protect copper
- Will not expand or shrink
- Not affected by freezing
- Excellent shelf life
- Typical resistivity <10 Ohm-cm

E-98

Material Required per Linear Foot of Trench Width of Trench (inches)												
		4	6	8	10	12	14	16	18	20	22	24
<b>Thickness of BURNDY® GROUNDMAX™ (Inches)</b>	2	4.10	6.20	8.10	10.10	12.10	14.10	16.20	18.20	20.20	22.20	24.20
	3	6.20	9.30	12.10	15.20	18.20	21.20	24.20	27.30	30.30	33.30	36.40
	4	8.20	12.30	16.20	20.20	24.20	28.30	32.30	36.40	40.40	44.50	48.50
	5	10.30	15.40	20.20	25.30	30.30	35.40	40.40	45.50	50.60	55.60	60.60
	6	12.30	18.50	24.20	30.30	36.40	42.40	48.50	54.60	60.60	66.70	72.70
	7	14.40	21.60	28.30	35.40	42.40	49.50	56.60	63.70	70.70	77.80	84.90
	8	16.40	24.70	32.30	40.40	48.50	56.00	64.70	72.70	80.80	88.90	97.00
	9	18.50	27.80	36.40	45.50	54.60	63.70	72.70	81.80	90.90	100.00	109.10
	10	20.60	30.80	40.40	50.50	60.60	70.70	80.80	90.90	101.00	111.10	121.20

### To calculate the pounds of material required to fill a trench:

- Determine desired thickness
- Move to the right on the chart above until you are under the known width of the trench - this number will be the weight of the material in lbs/linear ft
- Take this number and multiply by the length of the trench in feet; your answer will be the amount of BURNDY® GROUNDMAX™ material required to fill the trench to the desired level in pounds

#### Example:

Thickness = 6 inches  
 Width of trench = 18 inches  
 = 54.6 lbs per linear ft (see table above)  
 Answer = 54.6 lbs per linear ft x 25 ft trench = 1,365 lbs of BURNDY® GROUNDMAX™  
 = Quantity of 28 50-lb bags of BURNDY® GROUNDMAX™

Blue highlighted items are industry standard and most frequently ordered.

**BURNDY® GROUNDMAX™**

**Application Information**

**Vertical Installation**

Drill or bore a hole the desired diameter and depth. Suspend ground electrode in center of hole to be filled. Pour BURNDY® GROUNDMAX™ until desired level is obtained. No tamping is required.

Dry Volume of BURNDY® GROUNDMAX™ vs. Hole Size		Ground Resistance Comparison of Bare Rod vs.	
Hole Size	Lbs. of BURNDY® GROUNDMAX™ Per Ft.	Hole Size with 5/8" x 10' Rod in Center of 15' Hole	Percent Resistance Compared to Rod Only (100%)
4"	6.5	4"	52%
6"	14.5	6"	47%
8"	25.8	8"	44%
10"	40.4	10"	42%
12"	58.1	12"	40%

**Horizontal or Grid Construction ①**

Pour into horizontal trench until level of ground wire is reached. Place ground wire. Pour additional BURNDY® GROUNDMAX™ until wire is covered to desired height. Cover with fill. No tamping required.


For grid construction, pour BURNDY® GROUNDMAX™ and spread over ground grid until desired thickness is achieved. Cover with fill.

Steady State Leakage Resistance ② Using 4/0 Copper Wire vs. BURNDY® GROUNDMAX™					
Length	0.457" Diameter Wire Only	Percentage of Resistance with 0.457" Wire Plus BURNDY® GROUNDMAX™ in Various Diameters Compared to Wire Only (100%)			
		2"	3"	4"	6"
25'	100%	83%	78%	74%	69%
50'	100%	85%	81%	77%	73%
75'	100%	86%	82%	79%	75%
100'	100%	87%	83%	80%	77%
150'	100%	88%	84%	82%	78%
200'	100%	88%	85%	83%	79%
250'	100%	89%	85%	83%	80%
300'	100%	89%	86%	84%	80%


① Entire grounding system should be surrounded by BURNDY® GROUNDMAX™. Conductors should be insulated as they exit BURNDY® GROUNDMAX™ column.

② The use of BURNDY® GROUNDMAX™ around the grounding system will also reduce surge impedance by increasing the effective contact area of the electrode to soil.

**Horizontal Construction**

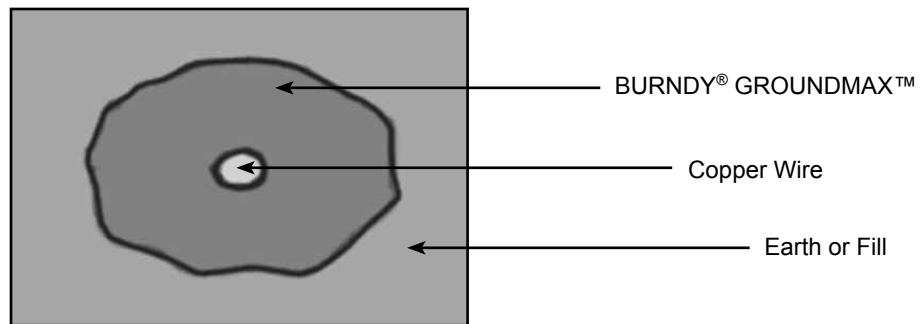

**Grid Construction**

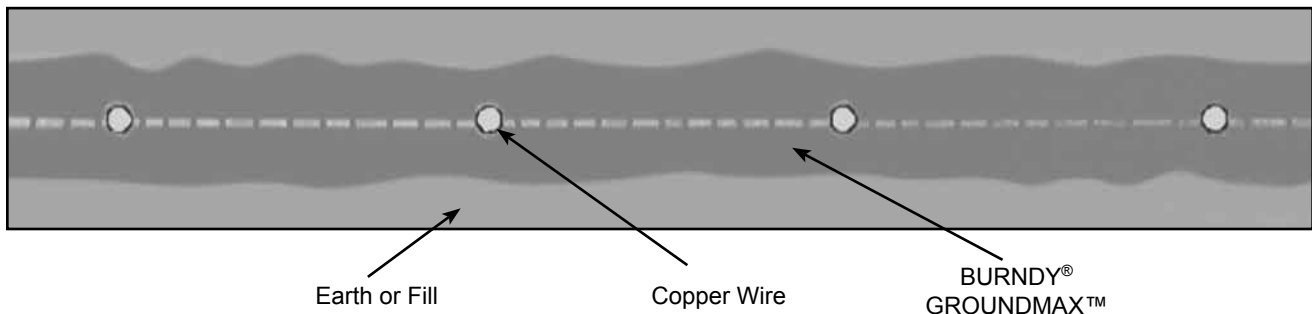

Blue highlighted items are industry standard and most frequently ordered.



# Grounding BURNDYWeld® Exothermic

**BURNDY®**

## BURNDY® GRIDMAX®

Grounding, Personnel Safety Mats, Equipotential Bonding, Pool and Spa Grounding

### Features & Benefits

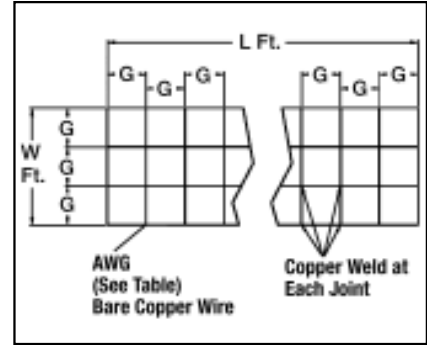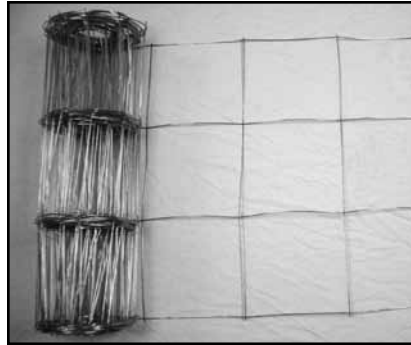

E-100


- Manufactured from bare solid copper
- Spaced on 4", 6" or 12" centers
- Copper to copper weld with 6% silver
- Furnished in sections with lengths from 4' to 100'
- Easily and economically installed using BURNDYWeld®, HYGROUND® or our Mechanical connectors
- Sizes made specifically for the Pool and Spa market 3' x 100' and 3' x 50'. But can be used where any large area grounds are required

Catalog Number	Conductor	Dimensions		
		G (spacing)	L (length)	W (width)
<b>BGM3100</b>	8 AWG	12"	100'	3'
<b>BGM3050</b>	8 AWG	12"	50'	3'
<b>BGM640044</b>	6 AWG	4"	4'	4'
<b>BGM640068</b>	6 AWG	8"	6'	4'
<b>BGM64006</b>	6 AWG	12"	6'	4'
<b>BGM640066</b>	6 AWG	6"	6'	4'

Call for custom mats



Example:  
GRIDMAX™  
3' wide in pool area

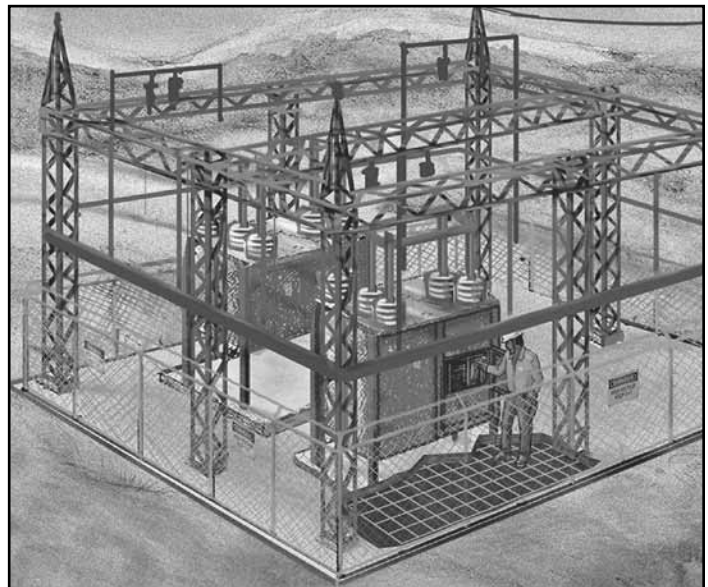

Example:  
GRIDMAX™  
Personnel Safety Mat

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175


www.burndy.com

Canada: 1-800-387-6487

**B-106 & B-107  
HANDLE CLAMPS**

BURNDYWeld® Handle Clamps make possible the use of many different sizes and types of molds with only two different clamps. The two handle clamps are catalog numbers **B-106** & **B-107**. These will fit 95% of all standard BURNDYWeld® molds.

1. Use B-106 clamps for all molds having a price key 4, 7, 17, 22 or 24. These molds are a nominal 3 1/8" x 3 1/8" square.
2. Use B-107 clamps for all molds having a price key 5, 6, 8 or 23. These molds are a nominal 4" x 4" square.
3. All molds having a price key 2, 3, 9, 10, 11, 12, 14, 15 or 16 have an attached frame; separate handles are not required.

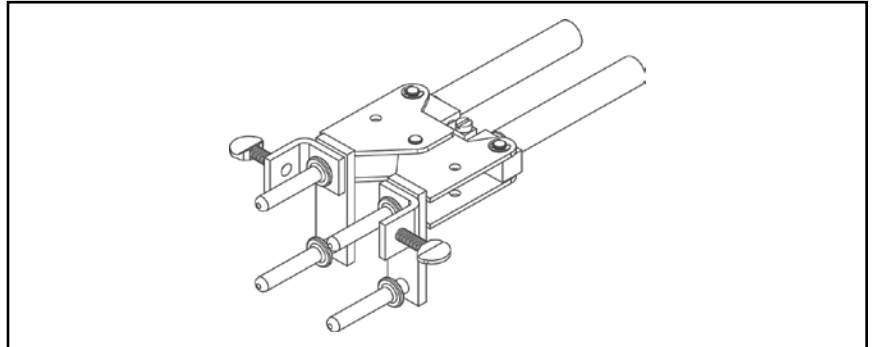


E-101

**B40-0106-75 HANDLE  
ATTACHMENT**

This Handle Attachment is used to hold Price Key 14 molds in position. It easily attaches to the B-106 Handle Clamp. This Handle Attachment can be used with weld types BCRE-1 and BCRE-4.



Catalog Number: **B40-0106-75**

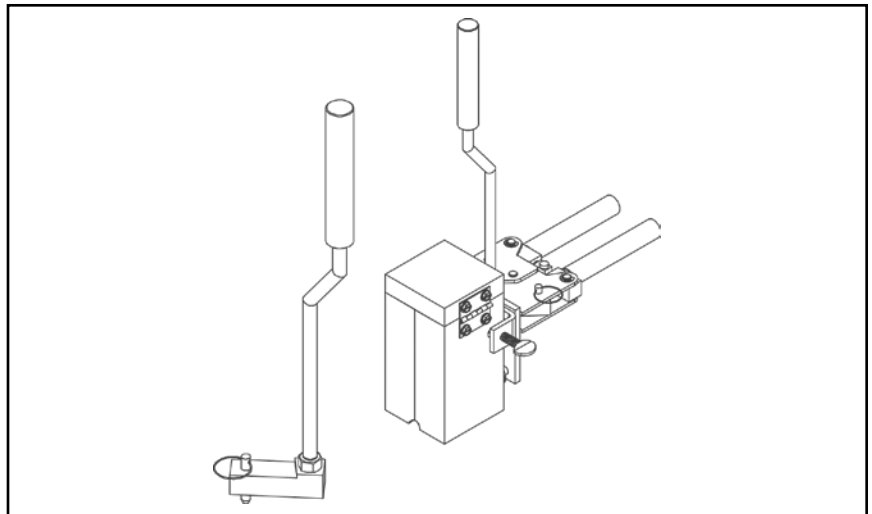

**MOLD SUPPORT CLAMP**

The Mold Support Clamp is used to hold a mold in position on a vertical steel column or angle. It is easily attached to the Handle Clamps. The Mold Support Clamp can be used with weld types BCS-3, BCS-18, BCS-23 and BCS-27.

Catalog Number: **B40-3657-00**

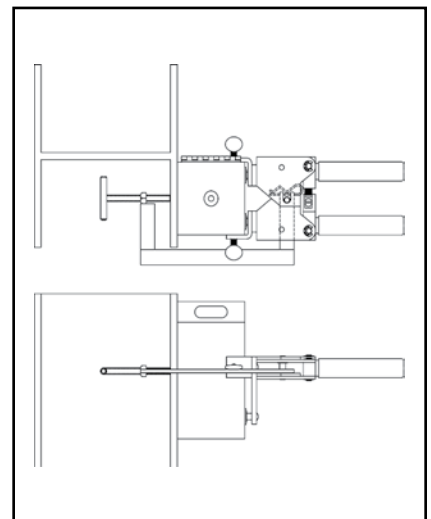
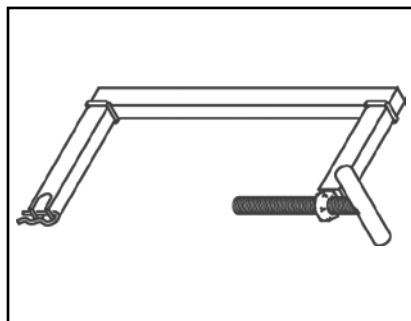


Blue highlighted items are industry standard and most frequently ordered.

## VERTICAL MAGNETIC CLAMPS

Magnetic Clamps are used to hold a mold in position on a vertical steel surface. The magnetic clamp can be purchased complete with B-106 Handle Clamps or if you already have a set of handle clamps, you can order just the magnetic mounting assembly. The mounting assembly can easily be mounted on the prongs of your existing B-106 handle clamps. A minimum of 10" is required.

E-102

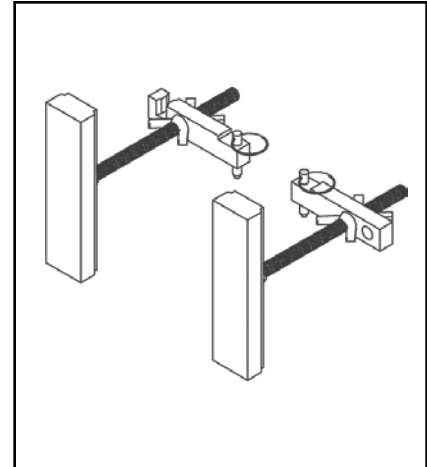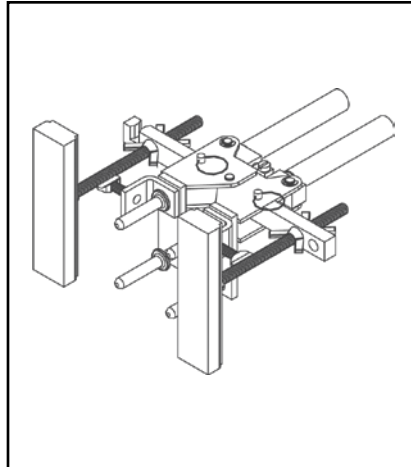





Magnetic Clamps with B106 Handle		
Catalog Number	Fits Molds w/ Price Key	For Use with Weld Types
<b>B40-4431-00</b>	4 & 17	BCS-3, 4, 7 & 23

Magnetic Clamp Only		
Catalog Number	Fits Handle Clamps	For Use with Weld Types
<b>B40-4431-00</b>	B-106 & B-107	BCS-3, 4, 7 & 23


## HORIZONTAL & VERTICAL CHAIN CLAMPS

### BURNDYWeld®

Chain Clamps are used to hold a mold in position on horizontal or vertical pipe up to 4" in diameter. For larger pipe a 20" chain extension is available to allow the chain clamps to be used on pipe up to 10" in diameter. The chain clamp can be purchased complete with B-106 or B-107 Handle Clamps or if you already have a set of handle clamps, you can order just the chain clamp and mounting assembly. The mounting assembly can easily be attached to your existing handle clamps. 20" Chain Extension catalog number: **B40-0106-27**.

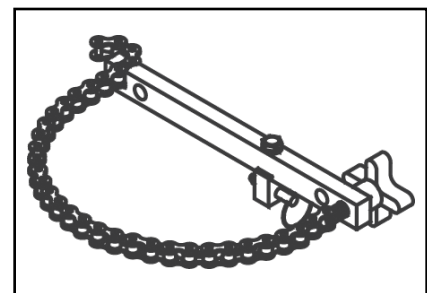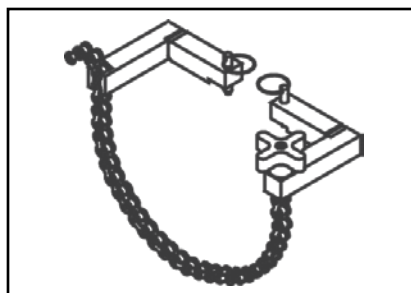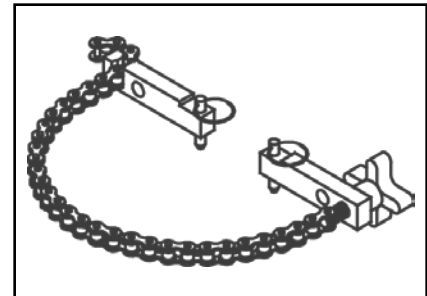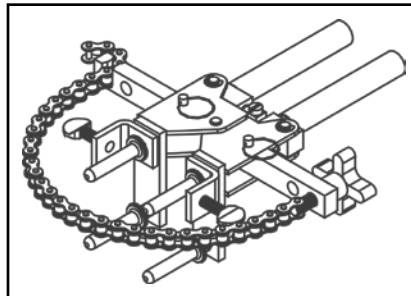

Chain Clamps			
Catalog Number	Fits Molds W/Price Key	For Use With Weld Types	Pipe Position
<b>B106-32</b>	4, 17, 22 & 24	BCS-3, 4, 7, 23 & BCRE-6	Vertical
<b>B107-32</b>	5, 6 & 23	BCS-3, 4, 7 & 23	Vertical
<b>B106-37</b>	4, 17, 22 & 24	BCS-1, 2, 5, 8 & 9	Horizontal
<b>B106-41</b>	4, 17	BCS-6, 18 & BCRE-3	Vertical

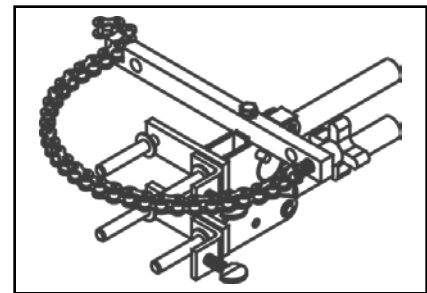


Chain Clamp Only (Handle Clamps Not Included)			
Catalog Number	Fits Handle Clamp	For Use With Weld Types	Pipe Position
<b>B40-0106-76</b>	B-106 & B-107	BCS-3, 4, 7, 23 & BCRE-6	Vertical
<b>B40-0106-78</b>	B-106 & B-107	BCS-1, 2, 5, 8 & 9	Horizontal
<b>B40-0106-77</b>	B-106 & B-107	BCS-6, 18 & BCRE-3	Vertical

Blue highlighted items are industry standard and most frequently ordered.

**BURNDYWeld®  
ACCESSORIES**


**B38-0330-00 Cable Clamp**

The BURNDYWeld® Cable Clamp is recommended for holding a wide range of cables properly in place in molds when welding cables that are under tension. This prevents the cables from pulling out of the mold when the weld is made.

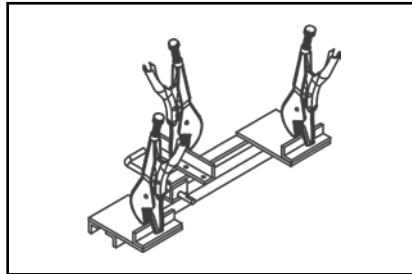

**Cable Cleaning and  
Card Cloth Brush**

The Cable Cleaning Brush is recommended for cleaning heavily oxidized cables. The V-shape brushes permit their use over a wide range of cable sizes. Brush assembly consists of a handle with two stiff wire bristle brushes that are rotatable, for longer life and are replaceable.

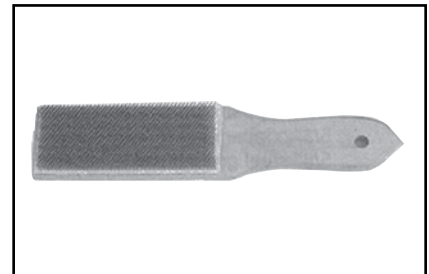

The Card Cloth Brush is used for cleaning large conductors and bus bar. It has short stiff bristles. These brushes are for cleaning cable only, not molds.

Description	Catalog Number
Cable Cleaning Brush	<b>B38-0315-00</b>
Replacement Brush	<b>B38-0135-01</b>
Card Cloth Brush	<b>B38-0306-00</b>
Mold Cleaning Brush	<b>B38-3922-00</b>



The Mold Cleaning Brush **B38-3922-00** is used to clean the graphite mold without scratching the mold.

**Mold Cleaners**

Mold Cleaners are used to clean the slag from molds that are not split through the crucible.

**B40-0319-01** for cartridge sizes #15 through #65


**B40-0319-03** for cartridge sizes #90 through #500



**Packing Material**

Packing material is used to prevent the molten weld metal from leaking out of the mold. When the cable opening becomes worn from heavy use, the packing material may be used to prolong mold use. It is also used around 7 strand cable to prevent leaking. Packing material comes in a 1 lb. or 5 lb. package.

Description	Catalog Number
1 lb. package	<b>B38412900</b>
5 lb. package	<b>B38412905</b>

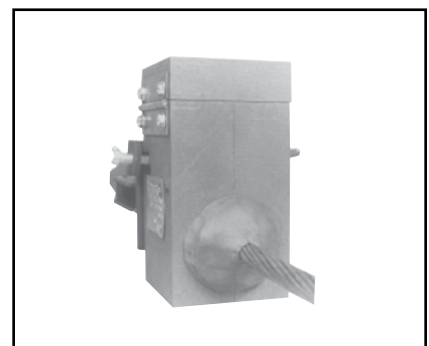

E-103

Blue highlighted items are industry standard and most frequently ordered.


## BURNDYWeld® ACCESSORIES

E-104



### BURNDYWeld® Tool Kit


- B38-0302-00** Tool Kit with Tools Shown except Rasp
- B38-0302-02** Tool Kit with Tools Shown and Rasp
- B38-0303-00** Tool Box only

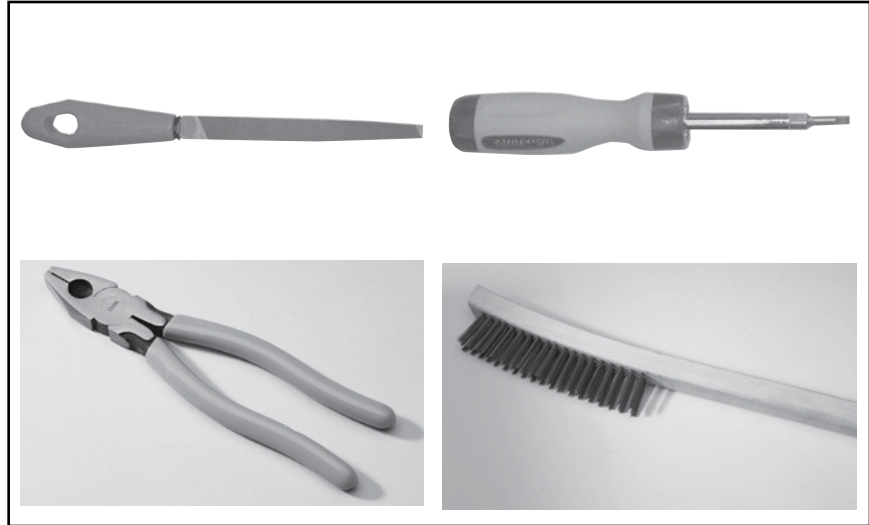

### BURNDYWeld® Tools

The **B38-0309-00** Flint Ignitor is used to ignite the starting powder. Each mold that is sold with a frame has a Flint Ignitor included. For added safety a Flint Ignitor extension is available, catalog number **B38-0904-00**, that attaches to the **B38-0309-00** Flint Ignitor. This allows installers to stay approximately 36" away from the mold. To order replacement flints, specify part number **B38-0309-01**.

- B38-0309-00** Flint Ignitor
- B38-0304-00** 8" File
- B38-0307-00** Crimping Tool
- B38-3922-00** Mold Cleaning Brush
- B38-0308-00** 6" Screwdriver
- B38-0305-00** Wire Brush
- B38-0101-00** Rasp
- B38-0306-00** Card Cloth Brush

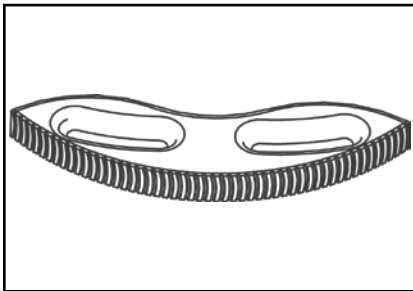

### B38-0101-00 Rasp

This tempered steel, curved rasp is recommended for removing rust and mill scale from steel and cast iron surfaces. The blade is replaceable. To order replacement rasp blade, specify catalog number **B38-0101-01**.

Not recommended for use on galvanized surfaces.



### B38-0309-00 Flint Ignitor

The **B38-0309-00** Flint Ignitor is used to ignite the starting powder. Each mold that is sold with a frame has a Flint Ignitor included. For added safety a Flint Ignitor extension is available, catalog number **B38-0904-00**, that attaches to the **B38-0309-00** Flint Ignitor. This allows installers to stay approximately 36" away from the mold.

To order replacement flints, specify part number **B38-0309-01**.


Blue highlighted items are industry standard and most frequently ordered.



**Ground Rod  
Driving Sleeves**

Ground Rod Driving Sleeves are placed over the top of a ground rod while driving it into the ground. This prevents the top from mushrooming or flaring out. Ground rod driving sleeves are available in sizes to fit all standard unthreaded ground rods.


Catalog Number	For Use On
<b>B38-3662-01</b>	1/2" Copper Clad or Steel Ground Rod
<b>B38-3662-02</b>	5/8" Copper Clad Ground Rod
<b>B38-3662-05</b>	5/8" Steel Ground Rod
<b>B38-3662-03</b>	3/4" Copper Clad Ground Rod
<b>B38-3662-06</b>	3/4" Steel Ground Rod
<b>B38-3662-04</b>	1" Copper Clad Ground Rod

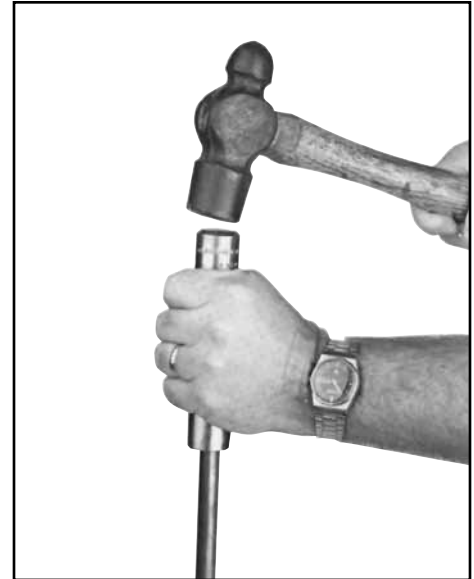

E-105

**SHIM STOCK AND ADAPTER SLEEVES**

BURNDYWeld® molds designed for larger cable sizes can be used on smaller diameter cables if copper adapter sleeves or shim stock are utilized. The copper shim stock, .0108" x 1-1/2" x 3", is normally wrapped around cable until the diameter is about equal to the cable opening. A tight fit is not necessary as the shim stock will unwrap slightly and prevent leakage of weld metal. To order shim stock use part number **B38-0329-00**. Shim stock comes 100 pieces per box.

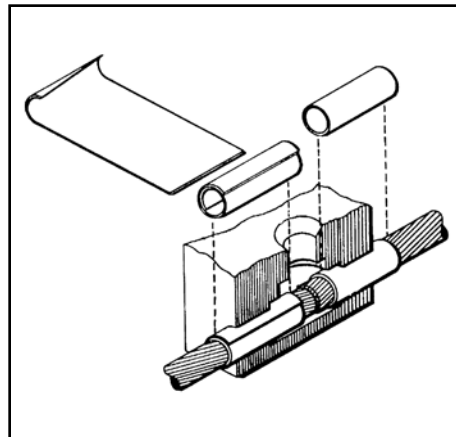

For Use on Cable Size		Part Number	Use in Mold Size	Sleeve Dimensions		
Stranded	Solid			O.D. Size	I.D.	Length
#12, #14	#10, #12, #14	<b>BA-200</b>	#6 Str. & Sol.	0.15	0.11	1.00
#9, #10	#8, #9, #10	<b>BA-208</b>	#4 Sol.	0.20	0.14	1.00
#7, #8, #10	#6, #8	<b>BA-201</b>	#4	0.22	0.17	1.00
#6	#5	<b>BA-202</b>	#2	0.29	0.19	1.00
#4, #5	#3, #4	<b>BA-207</b>	#2	0.30	0.24	1.00
#4	#2	<b>BA-204</b>	#1	0.34	0.24	1.00
#2	#1	<b>BA-203</b>	1/0	0.37	0.30	1.00
#1	1/0	<b>BA-209</b>	2/0	0.42	0.35	1.00
1/0, #1	2/0	<b>BA-205</b>	3/0 & 4/0 Sol.	0.46	0.38	1.00
2/0, 1/0	3/0	<b>BA-240</b>	4/0	0.52	0.43	1.50
4/0	—	<b>BA-211</b>	300 kcmil	0.62	0.54	1.25
250 kcmil	—	<b>BA-212</b>	350 kcmil	0.67	0.59	1.25
350, 400 kcmil	—	<b>BA-213</b>	500 kcmil	0.81	0.76	1.50
250, 300, 350 kcmil	—	<b>BA-214</b>	500 kcmil	0.81	0.70	1.50
750, 800 kcmil	—	<b>BA-215</b>	1000 kcmil	1.15	1.05	1.50

Blue highlighted items are industry standard and most frequently ordered.