


BURNDY® Products FCI

Cable Ties

UNIRAP™

STANDARD CABLE TIES (Continued)

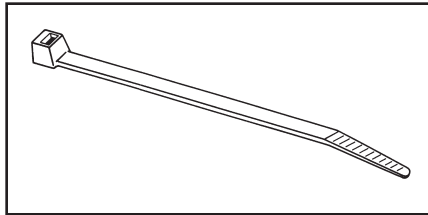

120 Lb. Minimum Tensile Strength

| STANDARD PACKAGE CATALOG NUMBER | MATERIAL | MAXIMUM BUNDLE DIAMETER In. [mm] | MINIMUM TENSILE STRENGTH Lbs. (N) | LENGTH In. [mm] | WIDTH In. [mm] | INSTALLATION TOOL | TOOL SETTING | BULK PACKAGE CATALOG NUMBER |
|---------------------------------|--------------------|----------------------------------|-----------------------------------|-----------------|----------------|-------------------|--------------|-----------------------------|
| CT120200L | Natural Nylon 6/6 | 2.00 [51] | 120 (534) | 8.87 [226] | .30 [7.6] | TWT2, MK9 | Standard | CT120200D |
| CT120200L0 | Black Nylon 6/6 UV | | | | | | | CT120200D0 |
| CT120300L | Natural Nylon 6/6 | 3.00 [76] | | 11.87 [302] | | | | CT120300D |
| CT120300L0 | Black Nylon 6/6 UV | | | | | | | CT120300D0 |
| CT120400L | Natural Nylon 6/6 | 4.00 [102] | | 15.25 [387] | | | | CT120400D |
| CT120400L0 | Black Nylon 6/6 UV | | | | | | | CT120400D0 |
| CT120900L | Natural Nylon 6/6 | 9.00 [229] | | 29.75 [776] | | | | CT120900D |
| CT120900L0 | Black Nylon 6/6 UV | | | | | | | CT120900D0 |

175 Lb. Minimum Tensile Strength



| STANDARD PACKAGE CATALOG NUMBER | MATERIAL | MAXIMUM BUNDLE DIAMETER In. [mm] | MINIMUM TENSILE STRENGTH Lbs. (N) | LENGTH In. [mm] | WIDTH In. [mm] | INSTALLATION TOOL | TOOL SETTING | BULK PACKAGE CATALOG NUMBER |
|---------------------------------|--------------------|----------------------------------|-----------------------------------|-----------------|----------------|-------------------|--------------|-----------------------------|
| CT175400Q | Natural Nylon 6/6 | 4.00 [102] | 175 (778) | 15.00 [381] | .35 [8.9] | TWT2, MK9 | Heavy | |
| CT175400Q0 | Black Nylon 6/6 UV | | | | | | | |
| CT175600Q | Natural Nylon 6/6 | 6.00 [152] | | 21.00 [533] | | | | |
| CT175600Q0 | Black Nylon 6/6 UV | | | | | | | |
| CT175900Q | Natural Nylon 6/6 | 9.00 [229] | | 32.00 [813] | | | | |
| CT175900Q0 | Black Nylon 6/6 UV | | | | | | | |
| CT1751100Q | Natural Nylon 6/6 | 11.00 [279] | | 36.00 [914] | | | | |
| CT1751100Q0 | Black Nylon 6/6 UV | | | | | | | |
| CT1751400Q | Natural Nylon 6/6 | 14.00 [356] | 52.00 [1321] | | | | | |
| CT1751400Q0 | Black Nylon 6/6 UV | | | | | | | |

K-7

250 Lb. Minimum Tensile Strength



| STANDARD PACKAGE CATALOG NUMBER | MATERIAL | MAXIMUM BUNDLE DIAMETER In. [mm] | MINIMUM TENSILE STRENGTH Lbs. (N) | LENGTH In. [mm] | WIDTH In. [mm] | INSTALLATION TOOL | TOOL SETTING | BULK PACKAGE CATALOG NUMBER |
|---------------------------------|--------------------|----------------------------------|-----------------------------------|-----------------|----------------|-------------------|--------------|-----------------------------|
| CT250600Q | Natural Nylon 6/6 | 6.00 [152] | 250 (1112) | 23.00 [584] | .50 [12.7] | TWT2, MK9 | Heavy | |
| CT250600Q0 | Black Nylon 6/6 UV | | | | | | | |
| CT250800Q | Natural Nylon 6/6 | 8.00 [203] | | 29.00 [737] | | | | |
| CT250800Q0 | Black Nylon 6/6 UV | | | | | | | |
| CT2501000Q | Natural Nylon 6/6 | 10.00 [254] | | 35.00 [889] | | | | |
| CT2501000Q0 | Black Nylon 6/6 UV | | | | | | | |
| CT2501200Q | Natural Nylon 6/6 | 12.00 [305] | 40.00 [1016] | | | | | |
| CT2501200Q0 | Black Nylon 6/6 UV | | | | | | | |