


## ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

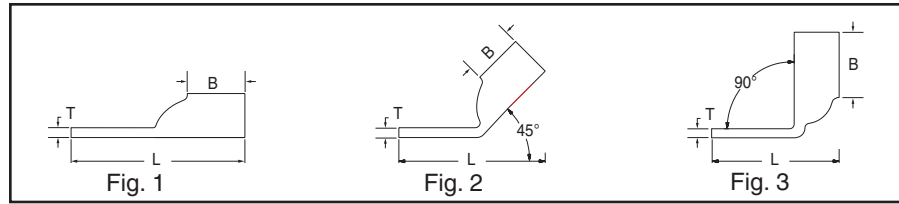

C-10

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions		▲ Installation Tooling						Wire Strip Length		
		AWG	MM <sup>2</sup>			(B)	(T)	(L)	Dieless (# of crimps)	Mechanical		Hydraulic			Color Code	Die Index
										MD6, OUR840 MD7-34R	BCT500HS Y500CTHS	Y35, Y39, Y750 Y46, BAT35, BAT750				
YA25L2-BOX	1	1/0 AWG		1/4"	.75"	.88"	.12"	1.84"	W25VT (2) W25RT (2) X25RT (2)	W25VT (2) W25RT (2) X25RT (2)	U25RT (1) U2CABT (1)	Pink	12	15/16"		
YA25L2-45	2							1.76"								
YA25L2-90	3							.94"								
YA25L4-BOX	1			3/8"	.75"	.88"	.12"	2.09"								
YA25L4-45	2							2.01"								
YA25L4-90	3							1.19"								
YA25L6-BOX	1			1/2"	.75"	.88"	.12"	2.34"								
YA25L6-45	2							2.26"								
YA25L6-90	3							1.44"								
YA25L-BOX	1			5/16"	.88"	.88"	.12"	1.96"								
YA25L-45	2							1.88"								
YA25L-90	3							1.07"								
YA26L2-BOX	1	2/0 AWG	70	1/4"	.83"	.94"	.12"	1.94"	W26VT (2) W26RT (2) X26RT (2)	W26VT (2) W26RT (2) X26RT (2)	U26RT (1)	Black	13	1"		
YA26L2-45	2							1.78"								
YA26L2-90	3							.96"								
YA26L3-BOX	1			5/16"	.83"	.94"	.12"	2.06"								
YA26L3-45	2							1.91"								
YA26L3-90	3							1.09"								
YA26L-BOX	1			3/8"	.83"	.94"	.12"	2.19"								
YA26L-45	2							2.03"								
YA26L-90	3							1.21"								
YA26L60	1			3/4"	.96"	.94"	.12"	2.96"								
YA26L60-45	2							2.77"								
YA26L60-90	3							1.89"								
YA26L6-BOX	1	1/2"	.83"	.94"	.12"	2.44"										
YA26L6-45	2					2.28"										
YA26L6-90	3					1.46"										
YA26L7-BOX	1	5/8"	.88"	.94"	.11"	2.69"										
YA26L7-45	2					2.50"										
YA26L7-90	3					1.71"										
YA26LNT516	1	5/16"	.62"	.94"	.13"	2.62"										
YA27L2-BOX	1	3/0 AWG		1/4"	1.00"	1.00"	.13"	2.04"	W27VT (2) W27RT (2) X27RT (3)	W27VT (2) W27RT (2) X27RT (3)	U27RT (1)	Orange	14	1-1/16"		
YA27L2-45	2							1.91"								
YA27L2-90	3							.99"								
YA27L3	1			5/16"	.91"	1.00"	.13"	2.16"								
YA27L3-45	2							2.03"								
YA27L3-90	3							1.12"								
YA27L4-BOX	1			3/8"	.91"	1.00"	.13"	2.29"								
YA27L4-45	2							1.91"								
YA27L4-90	3							.99"								
YA27L-BOX	1			1/2"	.91"	1.00"	.13"	2.54"								
YA27L-45	2							2.41"								
YA27L-90	3							1.49"								
YA27LNT38	1	3/8"	.76"	1.00"	.12"	2.71"										
YA28L17-BOX	1	4/0 AWG		5/8"	1.02"	.88"	.14"	2.64"	W28VT (2) W28RT (2) X28RT (3)	W28VT (2) W28RT (2) X28RT (3)	U28RT (1)	Purple	15	1-1/8"		
YA28L17-45	2							1.79"								
YA28L17-90	3							1.96"								
YA28L2-BOX	1							1/4"							1.02"	.88"
YA28L2-45	2	1.89"														

\* Use P-UADP-1 adapter with "U" dies in Y46 HYPRESS™.  
\*\* P-RT die sets for use in Y46 HYPRESS™ only, P-UADP-1 adapter not required.

\*\*\* The MM<sup>2</sup> conductor sizes listed are the recommendations for Class 2 conductor.  
▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.