

JOB NAME \_\_\_\_\_

TYPE \_\_\_\_\_

# MOUNTING ACCESSORIES

## ORDERING MATRIX




### FAMILY


- HMR - Suspension Hook Male
- HMG - Suspension Hook Male Grommeted
- LMR - Suspension Loop Male
- LMG - Suspension Loop Male Grommeted
- EHMR - Economy Suspension Hook Male  
(Use with EHO/EHE/EHL only)

## DIMENSIONS


### HMR/HMG



### LMR/LMG



### EHMR



## ORDERING MATRIX

**SCB**




### FAMILY

- SCB - Ballast Retainer Chain

### LENGTH

- 3 - 3'
- 5 - 5'
- 7 - 7'
- 10 - 10'

## PRODUCT FEATURES



- #2/0 Bulldog chain
- Design working load - 255 lbs. max.
- Pull out test - 1000 lbs. min.

## ORDERING MATRIX

**BSC**




### FAMILY

- BSC - Ballast Safety Cable

### LENGTH

- 3 - 3'
- 6 - 6'
- 9 - 9'

## PRODUCT FEATURES

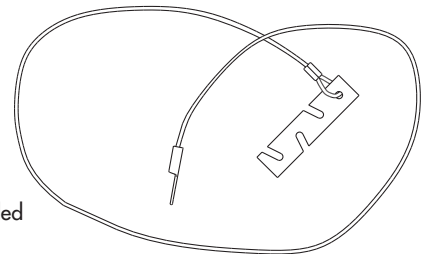

- 3/32 galvanized steel cable 7X7 stranded
- Minimum break strength - 920 lbs.
- Pull out test - 600 lbs. min.


## ORDERING MATRIX

**SCOP**

### FAMILY

- SCOP - Low Bay Optical Assembly Retainer Chain (Use with BRA/CRA and LRA only)

## PRODUCT FEATURES



- #4 double loop zinc plated steel chain
- Design working load - 70 lbs. max.
- Pull out test - 280 lbs. min.