



GE
Lighting

23075 - F60T12/CWHO 15PK

GE Cool White T12



GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Recessed Double Contact (R17d)
Rated Life	12000.0 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	-29.0 °C
LEED-EB MR Credit	1674 picograms Hg per mean lumen hour
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	5150.0
Mean Lumens	4480.0
Nominal Initial Lumens per Watt	68
Color Temperature	4100.0 K
Color Rendering Index (CRI)	60.0

ELECTRICAL CHARACTERISTICS


Wattage	75.0
Voltage	98.0
Open Circuit Voltage (rapid start) Min @ Temperature	325 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	60.0000 in(1524.0 mm)
Minimum Overall Length	57.7200 in(1466.1 mm)
Nominal Length	60.0000 in(1524.0 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)
End of Base Pin to End of Opposite Pin End (C)	57.720 in(1466.1 mm)

PRODUCT INFORMATION

Product Code	23075
Description	F60T12/CWHO 15PK
ANSI Code	1014-1
Standard Package	Case
Standard Package GTIN	10043168230756
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168230759

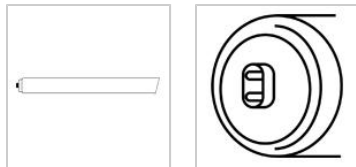

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

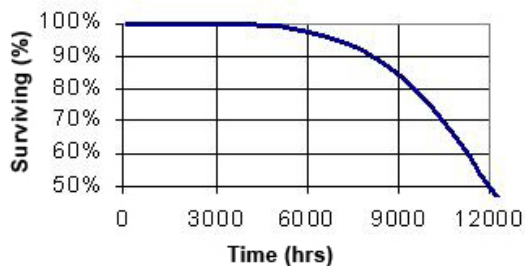

Graphs_Spectral Power Distribution

