

Flood Lighting

FLS Series

The FLS Series luminaire is ideal for parks, signs and sports fields.



Features:

- Heavy-duty construction with corrosion resistant hardware
- Dark bronze powder coat finish
- Standard stem mount. Optional slipfitter mounting available

Specifications:

Lens:	High impact and heat resistant tempered glass for greater protection
Construction:	Heavy-duty die-cast aluminum housing with dark bronze powder coat finish. One piece anodized aluminum reflector for better light efficiency.
Lampholder:	Specification grade porcelain socket
Ballasts:	Quad-Tap - 120V / 208V / 240V / 277V Tri-Tap - 120V / 277V / 347V
Certification:	UL and cUL listed suitable for wet locations

Dimensions:

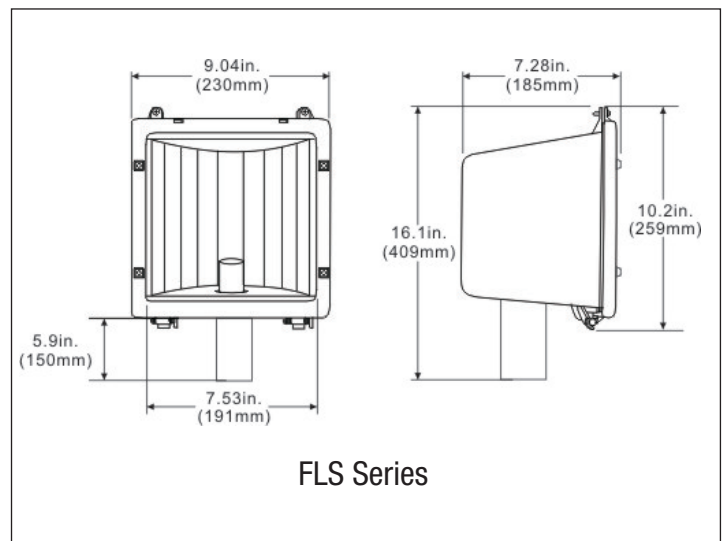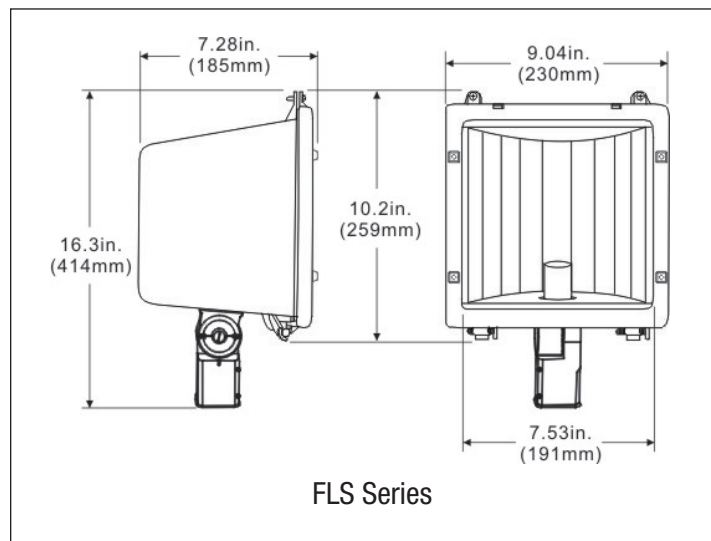

Project: _____

Location: _____

Product Type: _____

Contact/Phone: _____

Model #: _____



FLS Series



Ordering Information:

Series	Lamp/Watts	Volts	Mounting	Options	Finish
FLS	Metal Halide	Q- Quad-Tap 120 / 208 / 240 / 277 VAC	No Suffix - 1/2" Stem	No Suffix - No Lamp	No Suffix - Dark Bronze
	50M 50 Watts - only available in 120/277V	T - Tri-Tap 120 / 277 / 347 VAC	SF - Slipfitter	L - Lamp	WH - White
	70M 70 Watts	120 - 120V (only for High Pressure Sodium)			
	100M 100 Watts	D - 120/277V (Must be used for 50W Metal Halide)			
	Pulse Start Metal Halide				
	150P 150 Watts				
	High Pressure Sodium (120V Only)				
	35H 35 Watts				
	50H 50 Watts				
	70H 70 Watts				
	100H 100 Watts				
	150H 150 Watts				

Accessories (sold and shipped separately)

FLS-WG	Wire Guard
FLS-VS	Vandal Shield
FLS-VI	Visor

Photometrics:

FLS150PQL - 150W Pulse Start Metal Halide
Flood Light
13,500 Lumens

