


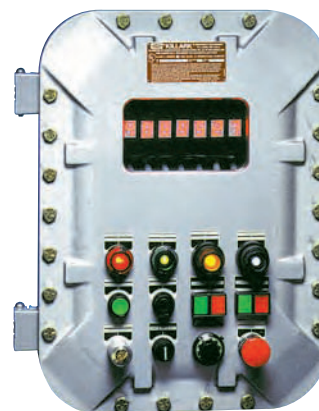

HINGE 4 & 9 Stainless Steel

HINGE-10L and HINGE-10R
HINGE-11L and HINGE-11R
Extruded Aluminum

Round and Rectangular
Lens Covers Must Be
Factory Installed

GL/GLX Series
Lens Cover

FEATURES-SPECIFICATIONS

HINGES


Applications

Hinges are installed on flanged enclosures to allow for easier and safer installation and when performing maintenance on internal components.

HINGES		
CATALOG NUMBER	SERIES USED	MATERIAL
HINGE-4	DB	Stainless steel
HINGE-9	EXB, XJB	Stainless steel
HINGE-10L	EXB, XJB;	Extruded aluminum
HINGE-10R	Larger sizes	Extruded aluminum
HINGE-11L	EXB,	Extruded aluminum
HINGE-11R	XJB, DB	Extruded aluminum

NOTE: Hinge 4 & 9 are single hinge and two required per enclosure.

- Hinge 10L-10R-11L-11R include two hinges
- Hinge 10L & 11L are for mounting on left side of enclosure
- Hinge 10R & 11R are for mounting on right side of enclosure
- All hinges supplied with stainless steel mounting screws and pins

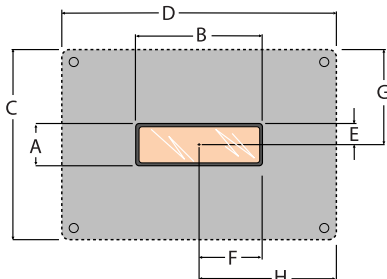

GL/GLX ROUND GLASS LENS COVERS

Applications

Use GL Series lens on:

- All EXB Boxes
- XJB 16" x 48" and XJB 24" x 24"

Use GLX Series lens on:

- All DB Boxes
- All XJB Boxes except 16" x 48" and 24" x 24"

Refer to recommended minimum spacing table. Series GL and GLX have identical viewing lens diameter and outside diameter. The difference is in the thread pitch.

GLXR RECTANGULAR GLASS LENS COVERS

Applications

Rectangular glass lens windows can be factory installed to enable viewing of digital read out meters and devices such as:

- Volt meters
- Flow meters
- Gas analyzers
- Process receivers, transmitters and controllers

Ordering Information

Rectangular lens option must be factory installed and ordered in conjunction with appropriate EXB Series enclosure. See page E19. Submit drawing or sketch to specify lens location. Consult factory for multi-lens arrangements.

GLXR RECTANGULAR LENS COVER ASSEMBLIES								
CATALOG NUMBER	VIEWING AREA		MINIMUM SPACE		OTHER DIMENSIONS			
	A	B	C	D	E	F	G	H
GLXR13	1"	3"	4.5"	6.5"	.5"	1.5"	2.25"	3.25"
GLXR24	2"	4"	5.5"	7.5"	1"	2"	2.75"	3.75"
GLXR27	2"	7"	5.5"	10.5"	1"	3.5"	2.75"	5.25"
GLXR34	3.5"	4"	7"	7.5"	1.75"	2"	3.5"	3.75"
GLXR36	3"	6"	6.5"	9.5"	1.5"	3"	3.25"	4.75"
GLXR47	4"	7"	7.5"	10.5"	2"	3.5"	3.75"	5.25"
GLXR59	5"	9"	8.5"	12.5"	2.5"	4.5"	4.25"	6.25"
GLXR99	9"	9"	12.5"	12.5"	4.5"	4.5"	6.25"	6.25"

GL/GLX RECOMMENDED MINIMUM SPACING —CENTERLINE TO CENTERLINE							VIEWING DIAMETER	OUTSIDE DIAMETER
GLASS LENS TYPE	GL/GLX-275	GL/GLX-300	GL/GLX-375	GL/GLX-537	GL/GLX-600	GL/GLX-775		
GL/GLX-275	7.0	7.5	7.75	8.75	9.0	10.0	2-3/4"	4-5/8"
GL/GLX-300	7.5	8.0	8.25	9.25	9.5	10.5	2-61/64"	5-1/4"
GL/GLX-375	7.75	8.25	8.5	9.5	9.75	10.75	3-45/64"	6-1/4"
GL/GLX-537	8.75	9.25	9.5	10.5	10.75	11.75	5-3/8"	7-7/8"
GL/GLX-600	9.0	9.5	9.75	10.75	11.0	12.0	6"	8-7/8"
GL/GLX-775	10.0	10.5	10.75	11.75	12.0	13.0	7-3/4"	10-1/4"

Note: For spacing less than minimum in table, (shown in inches) consult factory.



KILLARK®