

AC Quiet Switches

Quickwire and Side Wired Framed Toggle 15 AMP 120V AC Quiet Switches

DESCRIPTION	CAT. NO.	COLOR*
		<small>Basic Cat. No. Denotes Brown</small>
Single-Pole	1451	15A: I, W
3-Way	1453	15A: I, W
Single-Pole with grounding screw	1451-2	15A: I, W, A
3-Way with grounding screw	1453-2	15A: I, W, A
Single-Pole, less ears with grounding screw	1451-4	15A: I, W
3-Way, less ears with grounding screw	1453-4	15A: I, W

Note: Cat. Nos. 1451 and 1453 are available in Convenience Packs: Brown (-CP), Ivory (-ICP) and White (-WCP).




1451-ICP

Quickwire and Side Wired Illuminated Toggle 15 AMP 120V AC

DESCRIPTION	CAT. NO.	COLOR*
		<small>Basic Cat. No. Denotes Brown</small>
Single-Pole Illuminated	1461-LHC	Clear Toggle
3-Way Illuminated	1463-LHC	Clear Toggle

Note: Illuminated switches do not require a neutral wire.



1461-LHC

CO/ALR Side Wired Framed Toggle 15 AMP 120V AC

DESCRIPTION	CAT. NO.	COLOR*
		<small>Basic Cat. No. Denotes Brown</small>
Single-Pole with grounding screw	2651-2	15A: I, W
3-Way with grounding screw	2653-2	15A: I, W
4-Way with grounding screw	2654	15A: I, W

Note: CO/ALR devices are for connection to 12 or 10 AWG aluminum conductors. All devices are UL Listed and CSA Certified.



SPECIFICATIONS & FEATURES

- Faster installation with combination of side wiring and Quickwire push-in wiring
- Quickwire accepts conductors up to #12 AWG; #14 AWG in Canada
- Side wire accepts conductors up to #10 AWG
- Large head triple-drive combination screws (Standard, Phillips, Robertson) for fast wiring installation
- Impact-resistant, durable thermoplastic toggle and frame
- See section T for more technical information

TESTING & CODE COMPLIANCE

- UL Listed (File # E-7458)
- CSA Certified (File # LR-3413)
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

COLOR

Basic Cat. Nos. shown above denote Brown color. Other colors available as listed, add suffix to catalog number as follows: Ivory (-I), White (-W), Almond (-A), Clear Toggle & Frame (-LHC).


HORSEPOWER

15A
1/2 @ 120V
2 @ 240V


MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2
Operating Temperature: -40°C to 65°C.

For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.

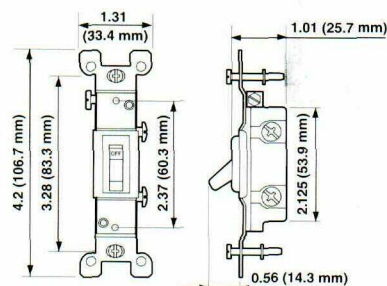

QUICKWIRE PUSH-IN & SIDE WIRED
Cat. Nos. 1451-2, 1461-LHC

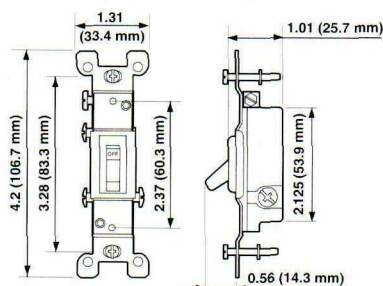

3-WAY QUICKWIRE PUSH-IN & SIDE WIRED
Cat. Nos. 1453-2, 1463-LHC