



**Color:**  Yellow-White

**UPC Code:** 07847780457

**Country Of Origin:** Mexico

**NEMA:**  
Non-NEMA



## 6361CR

### Brand Features

Leviton's Black &White 50 Amp, Non-NEMA line of industrial grade locking blade devices feature rugged construction that resists impact, sunlight, chemicals and rough use. All contacts and blades are solid one-piece construction for superior conductivity. Corrosion resistant versions feature nickel plated contacts and blades, plus stainless steel shrouds and screws. The ergonomic, fluted-body design with radial gripping edge is ideal for gripping and pulling. The unique cord clamp accepts a wide range of cord sizes, providing a secure grip without damaging the cord. And, they are backed by a limited lifetime warranty.

### Item Description

50Amp, 125V AC, Non-NEMA, 2P, 3W, Black &White Locking Plug, Industrial Grade, Grounding, Corrosion-Resistant(CR) - YELLOW/WHITE

### Technical Information

#### Electrical Specifications

**Grounding:** Grounding

**Amperage:** 50 A

**Voltage:** 125 VAC

**Pole:** 2

**Wire:** 3

**Dielectric Voltage Withstand:** 2000V minimum per UL 498

**Maximum Working Voltage:** 125V as rated

**Current Interrupting:** Certified for current interrupting at full rated current

**Temperature Rise:** Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

#### Environmental Specifications

**Flammability:** UL94V-2

**Operating Temperature:** -40°C to 75°C

**Environment:** Corrosive

#### Material Specifications

**Face Module:** Nylon

**Wiring Chamber:** Nylon

**Assembly Screws:** Nickel-Plated Brass

**Housing Material:** Nylon

**Dust Shield:** Santoprene TPE

**Terminal Block:** 0.062inch thick Nickel Plated Copper

**Terminal Set Screw:** SS 302/304

**Ground Shunt:** Nickel Plated Bronze

**Ground Post:** Nickel Plated Brass

**Plug Blade:** 0.100inch thick Nickel Plated Brass

**Plug Blade Shroud:** SS 302/304

**Standard Cable Clamp:** Nylon

**Cable Clamp Screw:** Philips Head, SS 304

**Color:** Yellow-White

#### Mechanical Specifications

**Terminal ID:** X, W, Y, Z and Green for ground

**Terminal Accom.:** #10 min to #4max AWG Solid or Stranded Wire

**Product ID:** Ratings and Catalogue No. molded into face and stamped into shroud

**Cord Range:** .680 - 1.125

#### Product Features

**NEMA:** Non-NEMA

**Color:** Yellow-White

**Brand:** Black and White

#### Standards and Certifications


**UL 498:** File E13399

**CSA C22.2 No. 42:** File 152105

**NOM:** 057

**RoHS:** Compliant

**Warranty:** Lifetime Limited

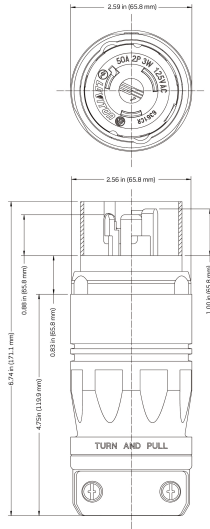

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

