

6369CR



UPC Code: 07847780462

Country Of Origin: Mexico

NEMA:
Non-NEMA



Brand Features

Leviton Black &White 50Amp Non-NEMA Locking devices are designed for faster wiring and longer life. Made from tough, impact-resistant nylon housings and metal shrouds, these plugs, connectors, receptacles and flanged inlets are designed for rugged environments like construction sites, commercial shipyards and convention centers.

Item Description

50 Amp, 125/250 Volt, Non-NEMA, 3P, 4W, Black &White Locking Flush Mount Receptacle, Industrial Grade, Grounding, Corrosion Resistant - BLACK

Technical Information

Electrical Specifications

Grounding: Grounding

Amperage: 50 A

Voltage: 125/250 VAC

Pole: 3

Wire: 4

Dielectric Voltage Withstand: 2000V minimum per UL 498

Maximum Working Voltage: 125/250V as rated

Current Interrupting: Certified for current interrupting at full rated current

Temperature Rise: Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Environmental Specifications

Flammability: Rated V-0 per UL 94

Operating Temperature: -40°C to 75°C

Environment: Corrosive

Material Specifications

Face Module: Reinforced Nylon

Body & Contract Carrier: Reinforced Nylon

Shroud: 0.062 inch thick SS 302/304

Back Cover: Reinforced Nylon

Mounting Strap: Single piece SS 302/304

Mounting Screws: SS 302/304

Assembly Rivets: SS 302/304

Connector Contact - Spring: 0.041inch thick Nickel Plated Brass

Connector Contact - Binding Plate: 0.100inch thick Nickel Plated Brass

Contact Rivet: Nickel Plated Brass

Box Terminal: 0.062inch thick Nickel Plated Copper

Terminal Set Screw: SS 302/304

Color: Black

Mechanical Specifications

Terminal ID: X, W, Y, Z and Green for ground

Terminal Accom.: #10min to #6max AWG Solid or Stranded Wire (Stranded Wire for Ground only)

Product ID: Ratings and Catalogue No. molded into face

Product Features

NEMA: Non-NEMA

Color: Black

Brand: Black and White

Standards and Certifications



UL 498: File E13399

CSA C22.2 No. 42: File 152105

NOM: 057

RoHS: Compliant

Warranty: Lifetime Limited

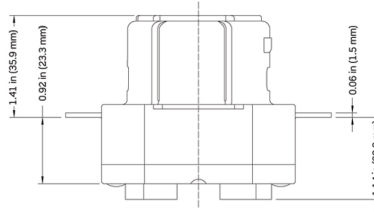

SPECIFICATION SUBMITTAL

JOB NAME:		CATALOG NUMBERS:	
<input type="text"/>		<input type="text"/>	<input type="text"/>
JOB NUMBER:		<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

