

# CS6365W

## Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

## Item Description

50Amp, 125/250V AC, Non-NEMA, 3P, 4W, Black & White Locking Plug, Industrial Grade, Grounding, California-Style(CS), Screwless Cable Clamp – BLACK/WHITE

## Technical Information

### Electrical Specifications

**Grounding:** Grounding

**Amperage:** 50 A

**Voltage:** 125/250 VAC

**Pole:** 3

**Wire:** 4

**Dielectric Voltage Withstand:** 2000V minimum per UL 498

**Maximum Working Voltage:** 125/250V as rated

**Current Interrupting:** Certified for current interrupting at full rated current

**Temperature Rise:** Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

### Environmental Specifications

**Flammability:** Rated HB or better UL94

**Operating Temperature:** -40°C to 75°C

**Environment:** Dry

### Material Specifications

**Face Module:** Nylon

**Wiring Chamber:** Nylon

**Assembly Screws:** Brass

**Housing Material:** Nylon

**Dust Shield:** Santoprene TPE

**Terminal Block:** 0.062inch thick Copper

**Terminal Set Screw:** SS 302/304

**Ground Shunt:** Bronze

**Ground Post:** Brass

**Plug Blade:** 0.1000inch thick Brass

**Plug Blade Shroud:** SS 302/304

**Standard Cable Clamp:** Nylon

**Compression Nut, Strain Relief:** Nylon

**Grommet/Gasket:** Santoprene TPE

**Color:** Black-White

### Mechanical Specifications

**Terminal ID:** X, W, Y, Z and Green for ground

**Terminal Accom.:** #10 min to #4max AWG Solid or Stranded Wire

**Product ID:** Ratings and Catalogue No. molded into face and stamped into shroud

**Cord Range:** .680 - 1.125

### Product Features

**NEMA:** Non-NEMA

**Color:** Black-White

**Device Type:** Locking Plug

**Brand:** Black and White

### Standards and Certifications

**UL 498:** File E13399

**CSA C22.2 No. 42:** File 152105

**NOM:** 057

**RoHS:** Compliant

**Warranty:** Lifetime Limited




**Color:** Black-White

**UPC Code:** 07847732627

**Country Of Origin:** Mexico

**NEMA:**  
Non-NEMA



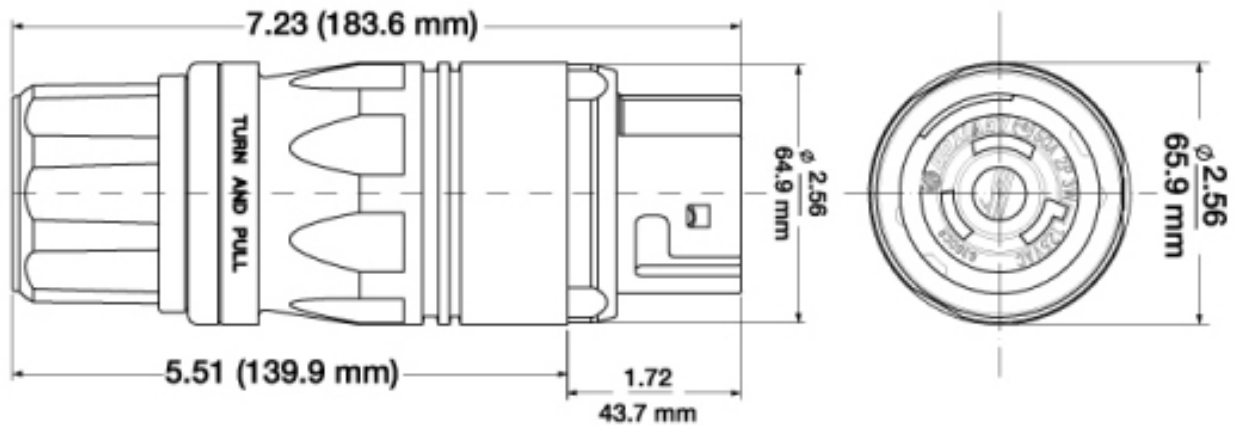

## SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

