

## Fiber Splice Holders & Sleeves

### APPLICATION

Leviton Splice Sleeves, available in standard, slim, mini, and micro styles, are designed with a stainless-steel strength member, polyolefin copolymer inner tube, and polyolefin outer tube for reliable fiber alignment during shipping, handling, and installation. Use them with Leviton Splice Holders to provide maximum protection from shock and vibration. Holders accommodate the entire range of Leviton fusion splice sleeves, plus devices from other manufacturers for complete design flexibility.



### SPECIFICATION

Fiber Splice Sleeves shall meet the requirements for Bellcore GR-1380 specifications. Outer tubing shall meet MIL-I-23053/5 Class 2 requirements. The sleeves shall feature a stainless-steel strength member, polyolefin copolymer inner tube and polyolefin outer tube with precise cut lengths and smooth ends. Sleeves shall be available in standard, slim, mini, and micro styles. Fiber Splice Holders shall accommodate the entire line of Leviton Fusion Splice Sleeves as well as devices from other manufacturers. Holders shall be available in foam or solid plastic with 6- and 12-fiber design options and adhesive backs.

### FEATURES — Splice Holders

- 6- and 12-fiber designs
- Mini, Micro, and Mechanical options available
- Adhesive back for ease of assembly
- Foam and solid plastic designs
- Sold separately for use in packaging of passive optical devices

### FEATURES — Splice Sleeves

- Precise lengths free of all burrs and sharp edges
- Heat-bonded assembly
- Choice of lengths and diameters
- Sleeves feature clear outer tube for viewing fiber color
- Slim sleeves feature reduced diameter to fit more finished product in splice trays
- Mini sleeves fit smaller width splice trays while still accommodating both 250 µm and 900 µm fibers, and require less shrink time
- Micro sleeves for splitter and coupler packages fit 250 µm fibers

### STANDARDS COMPLIANCE

Outer tube of the splice sleeves meets MIL-I-23053/5 Class 2. Standard style sleeves meet Bellcore GR-1380 specifications.

### PHYSICAL SPECIFICATIONS

Dimensions:	See page two
Outer Tube	Polyolefin
Working Temperature	-55° C to 135° C (-65° F to 275° F)
Ultimate Strength	220 kg/cm2
Elongation	650%
Specific Gravity	0.95
Water Absorption	0.05%
Minimum Shrink Temp	95° C (203° F)
Fungus Resistance	Inert
Solvent Resistance	Good
Acid Resistance	Excellent
Inner Tube	Polyolefin Copolymer (Ethylene-Vinyl Acetate)
Ultimate Strength	200 kg/cm2
Elongation	700%
Melting Point	80° C (176° F)
Specific Gravity	0.93
Strength Member	302 Stainless Steel with rounded and polished ends
Shrink Time*	Standard: 90 seconds Mini/Micro: 30-50 seconds

\*Shrink times vary with heater style and ambient temperature.

### WARRANTY INFORMATION


For a copy of Leviton product warranties, visit [www.leviton.com](http://www.leviton.com).

### ELECTRONIC FILES

For CAD files, typical specs, or dimensional line art (.DXF, .DWG,) visit [www.leviton.com](http://www.leviton.com).

Page 1 of 2

<b>Leviton Network Solutions</b> 2222 - 222nd St. SE Bothell, WA 98021-4416  tel 1-800-824-3005 tel +1-425-486-2222 appeng@leviton.com www.leviton.com	<b>Asia / Pacific</b> T +1.631.812.6228 E infoasean@leviton.com	<b>Canada</b> T +1.514.954.1840 E pcservice@leviton.com	<b>Caribbean</b> T +1.954.593.1896 E infocaribbean@leviton.com	<b>China</b> T +852.2774.9876 E infochina@leviton.com	<b>Colombia</b> T +57.1.743.6045 E infocolombia@leviton.com
	<b>Europe</b> T +33.6.8869.1380 E infoeurope@leviton.com	<b>India / SAARC</b> T +971.4.886.4722 E infoindia@leviton.com	<b>Mexico</b> T +52.55.5082.1040 E Isamarketing@leviton.com	<b>Middle East &amp; Africa</b> T +971.4.886.4722 E lmeinfo@leviton.com	<b>South Korea</b> T +82.2.3273.9963 E infokorea@leviton.com

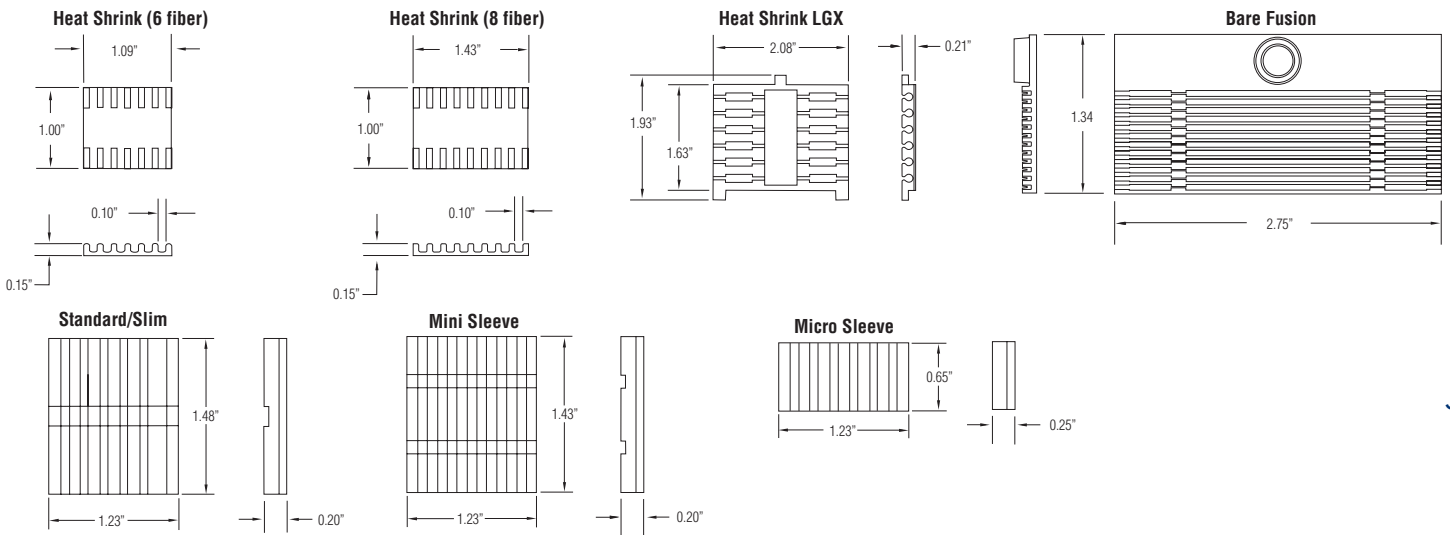

FSHxx-xxx, FSSx-xxx

**MAXIMUM SLEEVES PER SLICE HOLDER**

Sleeves	Holders					
	Heat Shrink 8 Fiber (black plastic)	Heat Shrink 6 Fiber (black plastic)	Heat Shrink 6 Fiber (black foam)	Mini Sleeve (black foam)	Micro Sleeve (black foam)	Heat Shrink (LGX footprint)
<b>Standard</b>	8	6	6	N/A	N/A	6
<b>Slim</b>	8	6	6	N/A	N/A	N/A
<b>Mini</b>	N/A	N/A	N/A	6	6	N/A
<b>Micro</b>	N/A	N/A	N/A	6	6	N/A

**SPLICE HOLDERS**

Description	Part No.
Splice Holder, heat shrink (black plastic), 6-fiber capacity	FSHHS-P06
Splice Holder, heat shrink (black plastic), 8-fiber capacity	FSHHS-P08
Splice Holder, heat shrink (black foam), 6-fiber capacity	FSHSL-F06
Splice Holder, mini sleeves (black foam), 6-fiber capacity	FSHMI-F06
Splice Holder, micro sleeves (black foam), 6-fiber capacity	FSHMR-F06
Splice Holder, bare fusion, 12-fiber capacity	FSHBF-P12
Splice Holder, heat shrink (LGX® footprint), 6-fiber capacity	FSHAT-F06
Splice Holder, ribbon, 6 position, 72-fiber capacity	FSHRB-F06

**FUSION SPLICE SLEEVES**

Description	Standard (50/pack)	(Slim 100/pack)	Mini (100/pack)	Micro (100/pack)	Ribbon (25/pack)
Fusion Splice Sleeve, 60 mm	FSSSD-060	FSSSL-060	—	—	—
Fusion Splice Sleeve, 40 mm	FSSSD-040	FSSSL-040	FSSMI-040	FSSMR-040	—
Fusion Splice Sleeve, 25 mm	—	FSSSL-025	FSSMI-025	FSSMR-025	—
Fusion Splice Sleeve, 40 mm	—	—	—	—	FSSRB-P40



<b>Leviton Network Solutions</b> 2222 - 222nd St. SE Bothell, WA 98021-4416  tel 1-800-824-3005 tel +1-425-486-2222 apeng@leviton.com www.leviton.com	<b>Asia / Pacific</b> T +1.631.812.6228 E infoasean@leviton.com	<b>Canada</b> T +1.514.954.1840 E pcservice@leviton.com	<b>Caribbean</b> T +1.954.593.1896 E infocaribbean@leviton.com	<b>China</b> T +852.2774.9876 E infochina@leviton.com	<b>Colombia</b> T +57.1.743.6045 E infocolombia@leviton.com
	<b>Europe</b> T +33.6.8869.1380 E infoeurope@leviton.com	<b>India / SAARC</b> T +971.4.886.4722 E infoindia@leviton.com	<b>Mexico</b> T +52.55.5082.1040 E lsamarketing@leviton.com	<b>Middle East &amp; Africa</b> T +971.4.886.4722 E lmeinfo@leviton.com	<b>South Korea</b> T +82.2.3273.9963 E infokorea@leviton.com