

FEATURES & SPECIFICATIONS

INTENDED USE — For landscape and facade lighting.

CONSTRUCTION — Rugged, die-cast, single piece low copper alloy aluminum housing. Die-cast doorframe has impact-resistant, tempered, glass lens. Doorframe is fully sealed with a closed-cell silicone gasket. Standard finish is textured dark bronze (DDBT) polyester powder finish, with other architectural colors available. Patent No. D552,778.

OPTICS — Anodized aluminum reflectors; segmented, specular or hammertone finish for superior uniformity and control. Reflectors are interchangeable and allow for tool-less access to electrical components.

ELECTRICAL — Quick disconnect plug easily disconnects reflector from ballast and fixture from supply wires. Compact fluorescent ballast is Class P, electronic, high power factor, multi-volt, <10% THD with starting temp of 0° F (-18° C). Ballasts are 100% factory tested. Compact fluorescent socket is high temperature thermoplastic with integral lamp retention clip; 4-pin. UL Listed.

INSTALLATION — Standard mounting is cast 3/4" threaded knuckle. Mounting mechanism features infinite locking points for aiming precision. Optional yoke mounting available, heavy-duty compact cast aluminum yoke adaptor to maintain fixture aesthetics. Provided with painted steel yoke and three feet of 16/3 SE00W cable.

LISTINGS — UL listed suitable for wet locations in all orientations. UL Listed to U.S. and Canadian safety standards (see Options). NOM Certified (see Options). IP66 rated. Canadian patent pending.

WARRANTY — 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type



AERIS™
Architectural Floodlighting

ASF1


COMPACT FLUORESCENT

Specifications

EPA: 1.20 ft²
Width: 15-1/2 (39.4)
Depth: 7-5/8 (19.4)
Height: 10 (25.4)
Overall Height: 10-7/8 (27.6)
*Max. Weight: 20 lbs (9.07 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

*Weight as configured in example below.

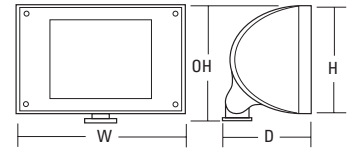

ORDERING INFORMATION

Lead times vary depending on options selected. Consult with your sales representative.

Example: ASF1 26TRT WDF MVOLT LPI

ASF1		WDF							
Series	Wattage ¹	Distribution	Voltage	Ballast	Mounting	Options	Finish ⁹	Lamp ¹⁰	
ASF1	26DTT 2/26DTT 26TRT 2/26TRT 32TRT 2/32TRT 42TRT 2/42TRT 57TRT 2/57TRT 70TRT	WDF Wide flood	120 277 347 MVOLT ¹	(blank) Electronic 0° F 2/1 Two, 1-lamp ballasts ²	<u>Shipped installed</u> (blank) Threaded knuckle (THK) YK Yoke mount <u>Shipped separately</u> ^{3,4} AFSTMTHK Stanchion mount ⁵ AFWMATHK Wall mount arm ⁵ AFTS Tenon slipfitter ⁵ AFTMBTHK Twin mounting bar ⁵ AFWMPTHK Wall mount plate ⁵ AFJB Architectural J-box ⁵ AFTM Tenon base mount ⁶	<u>Shipped installed</u> GMF Internal slow-blow fusing (n/a with MVOLT) PE Photoelectric cell-button type (n/a with MVOLT) ⁷ CSA Listed and labeled to comply with Canadian Standards NOM NOM certified ⁸ <u>Shipped separately</u> ³ ASF1GS Glare shield (upper or bottom visor) ⁴ ASF1EV Eggcrate visor (black only) ASF1FV Full visor ⁴ ASF1BD Barn door ⁴ ASF1BVG Vandal guard ASF1FV/BVG Full visor/vandal guard ⁴	DDBT Dark bronze, textured DSST Sandstone, textured DNAT Natural aluminum, textured DWHG White, textured DBLB Black, textured CRT Non-stick protective coating (black only) <u>Super Durable Finishes</u> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white	LPI Lamp included L/LP Less lamp	

Notes



- Multi-volt electronic ballast (for DTT and TRT lamps). Capable of operating any line voltage between 120V and 277V.
- Not available with PE option.
- May be ordered as an accessory.
- Must specify finish when ordered as an accessory.
- For use with 3/4" THK mounting only.

- For use with AFTS mounting option only.
- Must be ordered with fixture; cannot be field installed.
- Consult factory for availability.
- See www.lithonia.com/archcolors for additional color options.
- Must be specified. 35K lamp with LPI.

ASF1 Fluorescent Architectural Flood

ASF1 2/57TRT WDF

TEST NO. LTL 14907

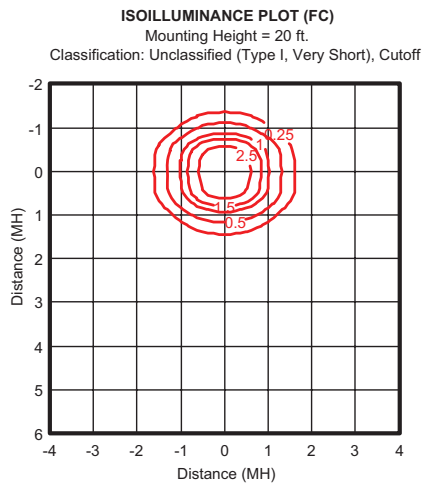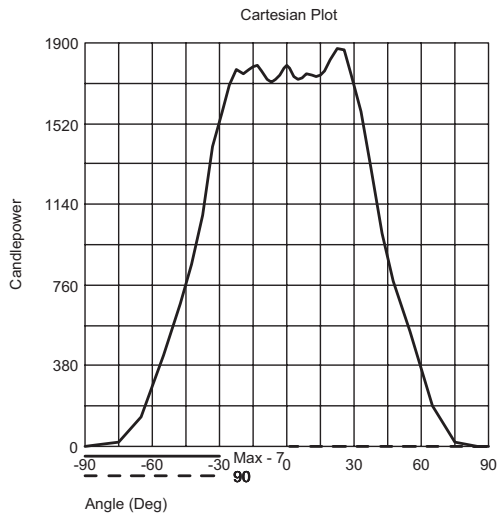

ASF1 70TRT WDF

TEST NO. LTL 14908

