

PRODUCT INFORMATION

NARROW STRIPS



Intended Use
Suitable for tight spaces like cove and/or task lighting.

Construction
Die-formed from code-gauge steel with white polyester finish.

Sturdy channel cover secured by captive quarter-

turn latch for easy access to wireway.

Electrical
FCC Part 18 for residential and commercial application (120V only).

Ballast disconnect provided standard on MV products where required to comply

with U.S. and Canadian electrical codes.

Installation
Ideal for continuous row installation applications where a narrow profile is desired.

Designed for surface or suspended mounting.

Listings
UL Listed. CUL Listed and CSA certified to Canadian Standards.




CONTRACTOR
SELECT

ORDERING INFORMATION

CATALOG NUMBER	DESCRIPTION	NUMBER OF LAMPS	LENGTH	LAMP TYPE	VOLTAGE	BALLAST	ENERGY STAR® QUALIFIED	LAMP INCLUDED
S115	T12 narrow strip	1	18"	15	120	Electronic, rapid start	N	N
S117 MV	T8 narrow strip	1	24"	17	120 - 277	NEMA Premium®, instant start	N	N
S120	T12 narrow strip	1	24"	20	120	Electronic, rapid start	N	N
S125 MV	T8 narrow strip	1	36"	25	120 - 277	NEMA Premium®, instant start	N	N
S130	T12 narrow strip	1	36"	30	120	Electronic, rapid start	N	N
S132 MV	T8 narrow strip	1	48"	32	120 - 277	NEMA Premium®, instant start	N	N
S132	T8 narrow strip	1	48"	32	120	Electronic, instant start	Y	N
S140	T12 narrow strip	1	48"	40	120	Electronic, rapid start	N	N
TS132 MV	T8 narrow strip	2	96"	32	120 - 277	NEMA Premium®, instant start	N	N
TS132	T8 narrow strip	2	96"	32	120	Electronic, instant start	N	N
S217 MV	T8 narrow strip	2	24"	17	120 - 277	NEMA Premium®, instant start	N	N
S225 MV	T8 narrow strip	2	36"	25	120 - 277	NEMA Premium®, instant start	N	N
S232 MV	T8 narrow strip	2	48"	32	120 - 277	NEMA Premium®, instant start	N	N
TS232 2MV	T8 narrow strip	4	96"	32	120 - 277	NEMA Premium®, instant start	N	N

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

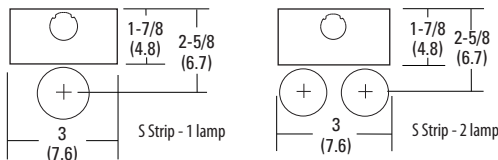

PRODUCT INFORMATION

GENERAL-PURPOSE STRIPS



Intended Use
Suitable for applications such as retail, commercial and light industrial.

Construction
Die-formed from code-gauge steel with white polyester finish.

Sturdy channel cover secured by captive quarter-turn latch for easy access to wireway.

Electrical
FCC Part 18 for residential and commercial application (120V only).

Ballast disconnect provided standard on MV products

where required to comply with U.S. and Canadian electrical codes.

Installation
Ideal for surface or suspended mounting. End plate used for continuous row installation applications.

Listings
UL Listed. CUL Listed and CSA certified to Canadian standards.



CONTRACTOR
SELECT

ORDERING INFORMATION

CATALOG NUMBER	DESCRIPTION	NUMBER OF LAMPS	LENGTH	LAMP TYPE	VOLTAGE	BALLAST	ENERGY STAR® QUALIFIED	LAMP INCLUDED
C217 MV	T8 general-purpose strip	2	24"	17	120 - 277	NEMA Premium®, instant start	N	N
C225 MV	T8 general-purpose strip	2	36"	25	120 - 277	NEMA Premium®, instant start	N	N
C232 MV	T8 general-purpose strip	2	48"	32	120 - 277	NEMA Premium®, instant start	N	N
C232	T8 general-purpose strip	2	48"	32	120	Electronic, instant start	Y	N
TC232 MV	T8 general-purpose strip	4	96"	32	120 - 277	NEMA Premium®, instant start	N	N
TC232	T8 general-purpose strip	4	96"	32	120	Electronic, instant start	Y	N
C296	T12 general-purpose strip	2	96"	75	120	Electronic, rapid start	N	N

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

