

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Ideal for mounting above entryways and loading docks.

CONSTRUCTION

Rugged, corrosion-resistant die-cast aluminum back housing and hinged door frame. Castings are sealed with a one-piece gasket to inhibit the entrance of external contaminants. Lens is thermal- and shock-resistant clear tempered glass. Finish is bronze polyester powder paint for lasting durability.

OPTICS

Anodized aluminum reflector, provides IES cutoff distribution. Optional full cutoff visor available.

Medium-base lamp included in carton.

ELECTRICAL

HID: Ballast is high-reactance, high-power-factor for 100-150W. Ballast is 100% factory-tested.

Socket: Medium-base socket, nickel-plated screw shell and center contact.

INSTALLATION

Housing is configured for mounting directly over a standard 4" outlet box or for surface wiring via any of three convenient 1/2" threaded conduit entry hubs.

LISTING

UL Listed to US and Canadian safety standards (see Options). Suitable for wet locations (25°C maximum ambient temperature).

WARRANTY

2-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.


Cutoff Wall Packs

TWR1C

METAL HALIDE: 100-175W
HIGH PRESSURE SODIUM: 150W



Consistent with LEED® goals & Green Globes® criteria for light pollution reduction.

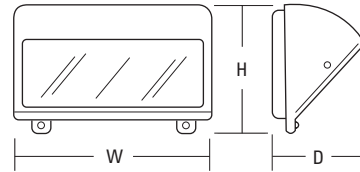

Specifications

Height: 10-1/4 (26.0)
Width: 13 (33.0)
Depth: 8-1/2 (21.5)
*Weight: 16.45lbs/ 7.46kg

All dimensions shown in inches (centimeters) unless otherwise noted.

*Weight as configured in example below.

ORDERING INFORMATION


Example: TWR1C 100M TB LPI

Catalog Number	Wattage	Voltage	Photocell included	Lamp included	Available in Canada
Metal halide					
TWR1C 100M TB LPI	100	120/208/240/277	N	Y	N
TWR1C 150M TB LPI	150	120/208/240/277	N	Y	N
High pressure sodium					
TWR1C 150S TB LPI	150	120/208/240/277	N	Y	N

Accessories: Order as separate catalog number. Shipped separately	
TWR1C FCV U	Full cutoff visor
TWR1C WG U	Wireguard


TWR1C High Pressure Sodium/Metal Halide Cutoff Wall Pack

TWR1C 150S TEST NO: LTL12138
ISOILLUMINANCE PLOT (Footcandle)

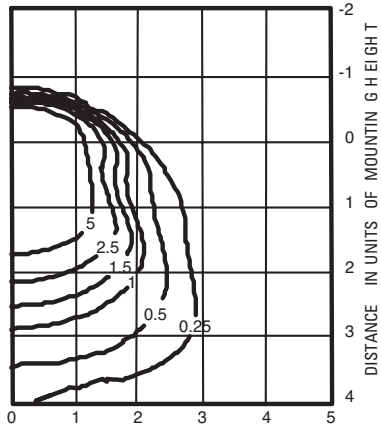

150W high pressure sodium lamp
Footcandle values based on 10'
mounting height, 15800 rated lumens.
Luminaire Efficiency: 66.9%

TWR1C 100M TEST NO: LTL12166
ISOILLUMINANCE PLOT (Footcandle)

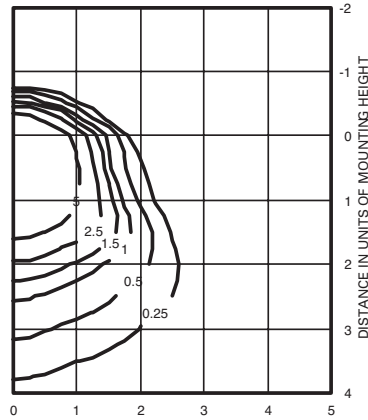

100W metal halide lamp,
Footcandle values based on 10'
mounting height, 8500 rated lumens.
Luminaire Efficiency: 69.0%