

# CONNECTORS

## Neutral Connectors


Neutral 225A 600 VAC

1024 Series



### FEATURES

- These stacked neutral assemblies offer the ultimate in compact design and performance.
- Wire holes are stacked to minimize width. One-piece construction provides superior mechanical performance.
- Made from high strength 6061T-6 aluminum alloy.
- Options include a 350 mcm main lug and a high strength, glass-filled polyester mounting base for isolated mounting.
- Available in 12 to 42 wire holes (4-14 awg).

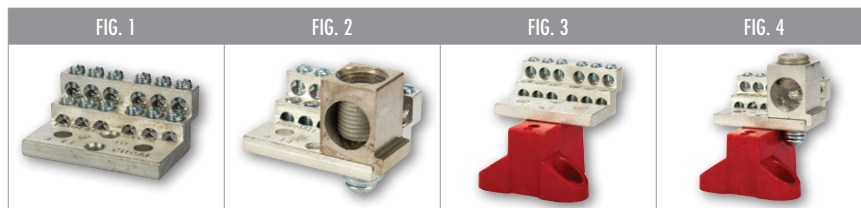

CAT. NO.	FIG. NO.	NO. OF 4-14 AWG CIRCUITS	MAIN LUG SIZE	MOUNTING BASE	LENGTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	STD. CTN. QTY.
1012	1	12	NONE	NO	2.068	0.875	1.500	1
1012M	2	12	350-6	no	2.193	1.375	1.500	1
1012B	3	12	none	yes	2.068	2.250	2.250	1
1012MB	4	12	350-6	yes	2.193	2.750	2.250	1
1018	1	18	none	no	3.132	0.875	1.500	1
1018M	2	18	350-6	no	3.257	1.375	1.500	1
1018B	3	18	none	yes	3.132	2.250	2.250	1
1018MB	4	18	350-6	yes	3.257	2.750	2.250	1
1024	1	24	none	no	4.196	0.875	1.500	1
1024M	2	24	350-6	no	4.321	1.375	1.500	1
1024B	3	24	none	yes	4.196	2.250	2.250	1
1024MB	4	24	350-6	yes	4.321	2.750	2.250	1
1030	1	30	none	no	5.260	0.875	1.500	1
1030M	2	30	350-6	no	5.385	1.375	1.500	1
1030B	3	30	none	yes	5.260	2.250	2.250	1
1030MB	4	30	350-6	yes	5.385	2.750	2.250	1
1036	1	36	none	no	6.324	0.875	1.500	1
1036M	2	36	350-6	no	6.449	1.375	1.500	1
1036B	3	36	none	yes	6.324	2.250	2.250	1
1036MB	4	36	350-6	yes	6.449	2.750	2.250	1
1042	1	42	none	no	7.388	0.875	1.500	1
1042M	2	42	350-6	no	7.513	1.375	1.500	1
1042B	3	42	none	yes	7.388	2.250	2.250	1
1042MB	4	42	350-6	yes	7.513	2.750	2.250	1