

# CABLE TIES

## Cable Tie Canister Packs


CTP Series

### SPECIFICATIONS

- cULus Listed for Positioning Devices UL62275.
- **Temperature Rating:** Min., -40°F to Max., 185°F (-40°C to 85°C).
- **Ideal Storage:** 23°C, Humidity 50%, Avoid storing cable ties next to warm objects.
- **Type 21 AH-2:** "Suitable for use in air-handling spaces (Plenums)".

### FEATURES

- Four sizes of canister packs include popular assortments of standard and colored cable ties.
- Provided in an air-tight canister to prevent drying, extending life.

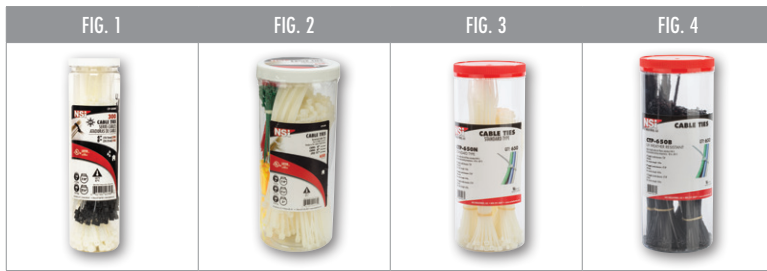

CAT. NO.	FIG. NO.	COLOR	CONTENTS	QTY.	BUNDLE DIAL	MAX BUNDLE DIAMETER	TENSILE STRENGTH	LENGTH (IN.)	WIDTH (IN.)	STD. PKG. QTY.	STD. CTN. QTY.
CTP-300	1	Natural	418	100	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	1	Red	418-2	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	1	Yellow	418-4	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	1	Green	418-5	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	1	Blue	418-6	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	1	Natural	840	50	2 1/8	2.125	40 Lbs.	8.000	0.140	1	12
	1	Red	840-2	25	2 1/8	2.125	40 Lbs.	8.000	0.140	1	12
	1	Blue	840-6	25	2 1/8	2.125	40 Lbs.	8.000	0.140	1	12
CTP-650	2	Natural	418	200	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	2	Red	418-2	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	2	Yellow	418-4	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	2	Green	418-5	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	2	Blue	418-6	25	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	2	Natural	840	300	2 1/8	2.125	40 Lbs.	8.000	0.140	1	12
	2	Natural	1150	50	3 1/8	3.125	50 Lbs.	11.000	0.187	1	12
CTP-650N	3	Natural	418	300	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	3	Natural	840	300	2 1/8	2.125	40 Lbs.	8.000	0.140	1	12
	3	Natural	1150	50	3 1/8	3.125	50 Lbs.	11.000	0.187	1	12
CTP-650B	4	UV Black	4180	300	7/8	0.875	18 Lbs.	4.000	0.100	1	12
	4	UV Black	8400	300	2 1/8	2.125	40 Lbs.	8.000	0.140	1	12
	4	UV Black	11500	50	3 1/8	3.125	50 Lbs.	11.000	0.187	1	12