

## APPLICATIONS


- Commercial

## SPECIFICATIONS

- Automatic operation with automatic LVD (low voltage disconnect) and universal transformer for 120 or 277 VAC
- Injection-molded V-0 flame retardant high-impact thermoplastic housing
- A 6 volt premium grade, pure lead, maintenance free battery - 90 min emergency operation
- Compact, low profile design in pleasing neutral finish with environmentally coated solid state charger



## DIMENSIONS

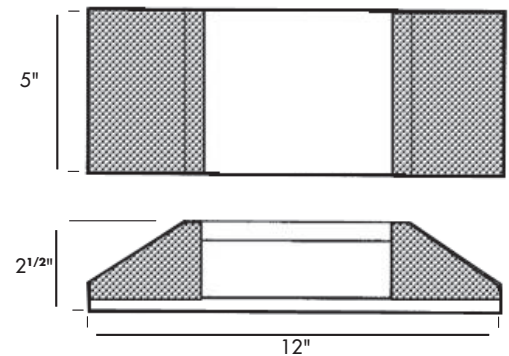

## ORDERING INFO.

CATALOG NO.	UPC NO.	BATTERY	HOUSING	LAMP	SHIPPING WEIGHT (LBS)
EMFW	05288	6 Volt	white	2 x 5.4W	3

The compliance of our products to individual project specifications and approval for their use, is not warranted by NSi Lighting Products. Specification sheets and photometric data are provided as a guideline for applications information. Final consideration of any given application must take into consideration knowledge of the specific installation environment.

Questions call NSi Lighting Products at 1-800-321-5847