

# GROUNDING CONNECTORS


## Isolated Ground Bars

### GBA, GBC SERIES



### FEATURES

- Made from either high-strength aluminum alloy 6061-T6 or high-conductivity copper as indicated below.
- The base is made from high-strength glass-filled polyester.
- Aluminum connectors are dual-rated for use with aluminum or copper cables.

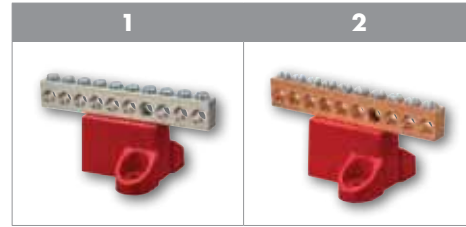

Aluminum and copper

Copper only

All dimensional data is listed in inches.

CAT. NO.	FIG. NO.	MATERIAL	WIRE RANGE	NO. OF CIRCUITS	LENGTH	HEIGHT	WIDTH	STD. CTN. QTY.
<b>GBA2-7</b>	1	Aluminum	AL/CU 2 - 14	7	2.88	2.31	1.88	3
<b>GBC2-7</b>	2	Copper	CU 2 - 14	7	2.88	2.31	1.75	3
<b>GBA2-10</b>	1	Aluminum	AL/CU 2 - 14	10	4.07	2.31	1.88	3
<b>GBC2-10</b>	2	Copper	CU 2 - 14	10	4.07	2.31	1.75	3
<b>GBA2-14</b>	1	Aluminum	AL/CU 2 - 14	14	5.56	2.31	1.88	2
<b>GBC2-14</b>	2	Copper	CU 2 - 14	14	5.56	2.31	1.75	2
<b>GBA2-20</b>	1	Aluminum	AL/CU 2 - 14	20	8.04	2.31	1.88	2
<b>GBC2-20</b>	2	Copper	CU 2 - 14	20	8.04	2.31	1.75	2
<b>GBA20-7</b>	1	Aluminum	AL/CU 2/0 - 14	7	4.61	2.31	2.13	3
<b>GBA20-10</b>	1	Aluminum	AL/CU 2/0 - 14	10	6.41	2.31	2.13	3
<b>GBA20-14</b>	1	Aluminum	CL/CU 2/0 - 14	14	8.81	2.31	2.13	2