



# MasterColor CDM-TM

## CDM20/TM/830 12PK

Introducing the smallest 20W ceramic metal halide lamp together with the unique e-Vision® electronic ballast. It's visually pleasing and financially rewarding, so the focus can be on your merchandise and not the ceiling clutter.

### Product data

General Information	
Cap-Base	PGJ5 [ PGJ5]
Operating Position	Universal [ Universal]
Life to 5% Failures (Nom)	9000 h
Life to 10% Failures (Nom)	10000 h
Life to 20% Failures (Nom)	11000 h
Life to 50% Failures (Nom)	12000 h
Light Technical	
Color Code	830 [ CCT of 3000K]
Luminous Flux (Rated) (Nom)	1650 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	80 %
Lumen Maintenance 10000 h (Nom)	60 %
Lumen Maintenance 2000 h (Nom)	75 %
Lumen Maintenance 5000 h (Nom)	65 %
Chromaticity Coordinate X (Nom)	0.433
Chromaticity Coordinate Y (Nom)	0.392
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	75 lm/W
Color Rendering Index (Min)	84
Color Rendering Index (Nom)	87

Operating and Electrical	
Power (Rated) (Nom)	22.0 W
Lamp Current Run-Up (Max)	.5 A
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	108 V
Voltage (Min)	95 V
Voltage (Nom)	100 V
Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min
Mechanical and Housing	
Bulb Finish	Clear (CL)
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.4 mg
Energy Consumption kWh/1000 h	24 kWh
UV	
Pet (Niosh) (Min)	8 h/500lx

# MasterColor CDM-TM


Damage Factor D/fc (Max)	0.5
<b>Luminaire Design Requirements</b>	
Bulb Temperature (Max)	380 °C
Cap-Base Temperature (Max)	250 °C
<b>Product Data</b>	
Order product name	CDM20/TM/830 12PK
EAN/UPC - Product	046677140403

Order code	140400
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928087905115
Net Weight (Piece)	0.005 kg
ILCOS Code	MT/UB-20/830-H/L-PGJ5-13.3/52

## Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050



## Dimensional drawing




CDM-Tm 20W/830 PGJ5

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
CDM20/TM/830 12PK	13.3 mm	0.44 in	3 mm	22.3 mm	22.9 mm	22.6 mm	52 mm

## Photometric data





CDM-Tm 20W /830 PGJ5

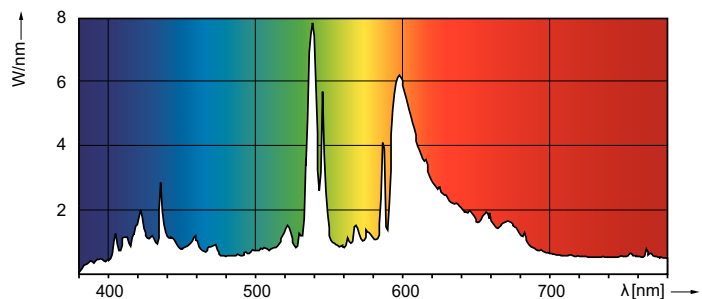

MASTERColour CDM-Tm Mini /830 & /930

# MasterColor CDM-TM

## Lifetime

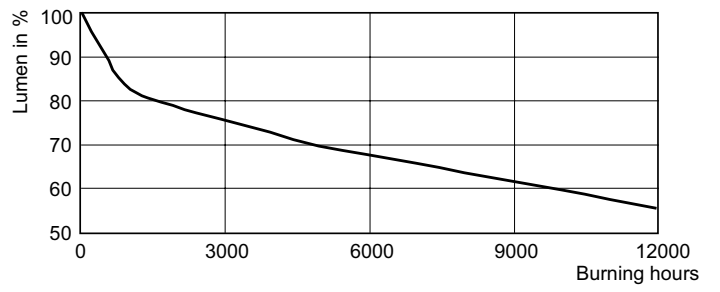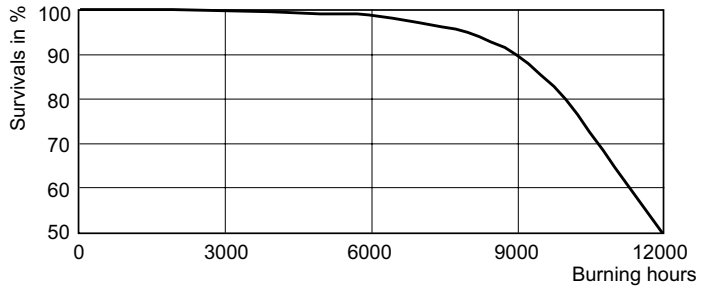

CDM-Tm Elite 20W Life Expectancy /830 PGJ5

CDM-Tm Elite 20W Lumen Maintenance /830 PGJ5

