



2' x 2' LED panel lights provide smooth and uniform light edge-to-edge for a clean, modern look. For use in drop ceilings or drywall using the optional recessed mounting kit.

Color: White

Weight: 20.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.33A
208V	0.202A
240V	0.175A
277V	0.152A
Input Watts	38.1W

LED Info

Watts	41W
Color Temp	4000K (Neutral)
Color Accuracy	83 CRI
L70 Lifespan	100,000 Hours
Lumens	4,823
Efficacy	126.6 lm/W

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations. Recommended for indoor use only.

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Construction

IC Rated:

Suitable for insulated ceilings

Lens:

High-transmission acrylic lens with excellent distribution and uniformity

Housing:

Lightweight housing is constructed of extruded aluminum

Finish:

Formulated for high durability and long-lasting color

Quick and Easy Installation:

Modular splice box/driver compartment available for quick installation. Integral Tee grid clips make installation easy and secure.

Green Technology:

Mercury and UV free. RoHS-compliant components.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color

Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Electrical

THD:

6.6% at 120V, 10.0% at 277V

Technical Specifications (continued)

Electrical

Power Factor:


99.6% at 120V, 91.7% at 277V

Listings

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: P0000178J

Dimensions

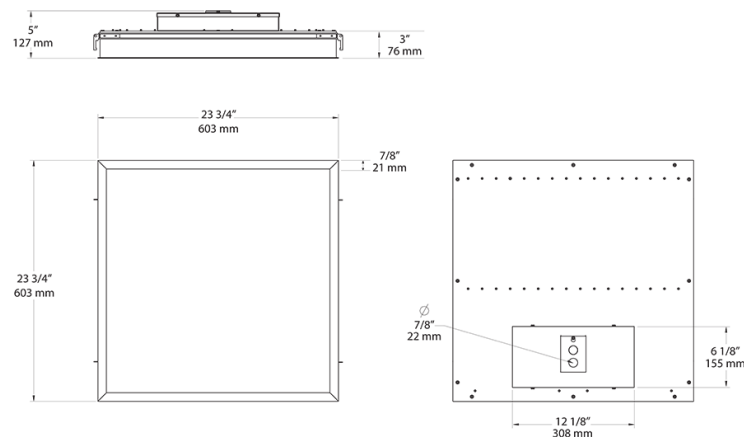

Features

High-transmission acrylic lens provides excellent distribution and uniformity

UL Listed for damp locations

5-Year, No-Compromise Warranty

Ordering Matrix

Family	Size		Wattage	Color Temp	Driver Options
PANEL	2X2	-	41	N	
	2X4 = 2' x 4'		34 = 34W (1x4 or 2x2)	N = 4000K (Neutral)	Blank = 120-277V On/Off
	2X2 = 2' x 2'		41 = 41W (1x4 or 2x2)	YN = 3500K (Warm Neutral)	/D10 = 120-277V w/ 0-10V Dimming
	1X4 = 1' x 4'		44 = 44W (2x4)	Y = 3000K (Warm)	/LC = Lightcloud® Controller
			52 = 52W (1x4 or 2x2)		/D10/LC = 0-10V Dimming w/ Lightcloud® Controller
			59 = 59W (2x4)		