



Compact ceiling mount fixture: 7, 9, 13, or 14 Watt fluorescent. Reflector is dieformed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. Lamp supplied.

Color: N/A

Weight: 2.6 lbs

| Project: | Туре: |
|--------------|-------|
| Prepared By: | Date: |

| Lamp Info | | Ballast Info | |
|--------------|---------|--------------|----------|
| Type: | 7W Twin | Type: | NPF 120V |
| Watts: | 7W | 120V: | 0.17A |
| Shape/Size: | N/A | 208V: | N/A |
| Base: | N/A | 240V: | N/A |
| ANSI: | N/A | 277V: | N/A |
| Hours: | 10,000 | Input Watts: | 9W |
| Lamp Lumens: | 400 | Efficiency: | 78% |
| Efficacy: | 44 LPW | | |
| | | | |

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Electrical

Sockets:

Plug-in type, thermoplastic.

Photocell:

Button Photocell requires mounting back box. Product number VAN1BB.

Optical

Refractor:

Injection molded polycarbonate, designed for maximum structural strength.

Construction

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver .

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel.

Lens:

Clear.

Ballast Minimum Starting Temperature:

0°F.

Othe

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Recovery Act (ARRA) Compliant:


This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

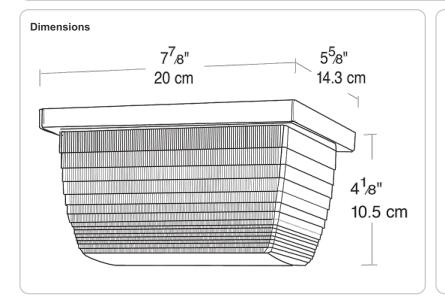

Features

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractors

Back boxes available for conduit entry