


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)

4732-8 -- 1/2" Non Metallic Liquidtight 90 Degree Connector - Swivel Lok®

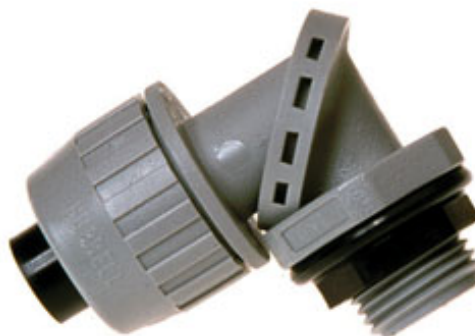

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Nonmetallic Connectors
Sub Class	Nylon for Type B conduit
Trade Size	1/2"
Standard Packaging	Polybag
Ship Carton Length	10.00
Ship Carton Width	5.25
Ship Carton Height	4.3125
WT. PER HU.	4.4
Dimension F	3.27"
Dimension G	.57"
Dimension H A/C	1.41"
Dimension H A/F	1.30"
Dimension I	1.30"
Dimension J	1.43"
Dimension K	2.00"
Pallet Qty	5760
Minimum Pack Qty.	20
Unit Carton Quantity	1
Ship Carton Quantity	20
UPC Number	050169473283

Applications

- For use in dry or wet locations when the conduit and fittings are not subject to physical damage

- Use Type B conduit and fittings whenever flexibility is required for installation, operation, or maintenance

Compliances

UL Standard 514B CSA - C22.2 #18 NEMA Type 4x, 12 and 13

Swivel Lok Connectors

- Swivel Lok®, multi-position connector (trade sizes 3/8" to 1") twists from 0° to 90°, easing installation in difficult locations and eliminating need to stock other angle connectors
- UPC bar coded fittings are individually polybagged with a preprinted UPC-A bar code and packaged in pre-scored tear top cartons for an attractive presentation
- All gray nonmetallic construction provides superior corrosion resistance
- Each connector is supplied with a Neoprene O-ring and nylon gasket

