


Products

- > [Index](#)
- > [Featured Products](#)
- > [Cross Reference](#)
- > [UPC Search](#)

Product Datasheet

[Catalog Home](#) [Home Page](#)

4733 -- 3/4" Non Metallic Liquidtight 90 Degree Connector - Swivel Lok®

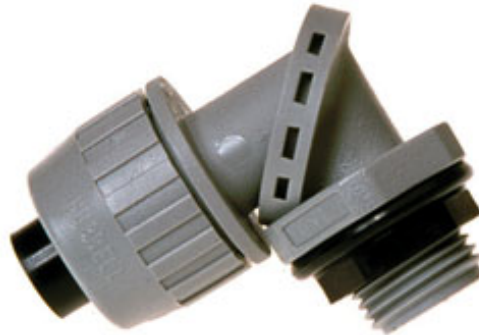

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Nonmetallic Connectors
Sub Class	Nylon for Type B conduit
Trade Size	3/4"
Standard Packaging	Carton
Ship Carton Length	11.5
Ship Carton Width	6.625
Ship Carton Height	5.0625
WT. PER HU.	9
Dimension F	3.66"
Dimension G	.58"
Dimension H A/C	1.65"
Dimension H A/F	1.53"
Dimension I	1.53"
Dimension J	1.59"
Dimension K	2.23"
Unit Carton Quantity	25
Ship Carton Quantity	25
UPC Number	050169947333

Applications

- For use in dry or wet locations when the conduit and fittings are not subject to physical damage
- Use Type B conduit and fittings whenever flexibility is required for installation, operation, or maintenance

Compliances

UL Standard 514B CSA - C22.2 #18 NEMA Type 4x, 12 and 13

Swivel Lok Connectors

- Swivel Lok®, multi-position connector (trade sizes 3/8" to 1") twists from 0° to 90°, easing installation in difficult locations and eliminating need to stock other angle connectors
- All gray nonmetallic construction provides superior corrosion resistance
- Each connector is supplied with a Neoprene O-ring and nylon gasket

