




# KWIKFLEX Specification Sheets

## Kwikflex® NMLT Flexible Conduit

### FEATURES & BENEFITS

- 3/8" thru 2" trade size
- Reels are UL Listed in any length
- Use with Kwikflex® straight or right angle connectors
- May also be used with metallic connectors for liquid-tight conduit
- Resists corrosion, abrasion, oil, water, acid, metal shavings, & rough environments
- Resists abuse, pull & crushing
- UL Rating: 80°C dry, 60°C wet, 80°C oil resistant
- Outdoor, sunlight resistant, direct burial
- CSA rating - 18°C to 75°C
- Smooth inside for easier wire pulling, no hazardous sharp edges or burrs, will not damage conductors
- Light weight & lower installed cost
- Quick installation, cuts with utility knife or PVC cutter

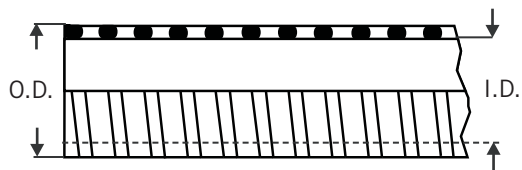

### APPLICATIONS

- HVAC equipment
- Machine tools
- Marine equipment
- Motors & controls
- Printing equipment
- Pumps
- Refrigeration equipment
- Transformer connections
- Outdoor lighting



### SPECIFICATIONS

Product Code	Trade Size	Std. Pkg.	Weight / Pkg.	Part Dimensions (inches)	
				O.D. Min.-Max.	I.D. Min.-Max
165005	3/8"	100	9	.690 - .710	.484 - .504
165007	1/2"	100	10	.820 - .840	.622 - .642
165009	3/4"	100	14	1.030 - 1.050	.820 - .840
165011	1"	100	19	1.290 - 1.315	1.041 - 1.066
165014	1-1/4"	100	22	1.630 - 1.660	1.380 - 1.410
165017	1-1/2"	50	14	1.865 - 1.900	1.575 - 1.600
165021	1-1/2"	100	41	1.865 - 1.900	1.575 - 1.600
165020	2"	50	21	2.340 - 2.375	2.020 - 2.045
165082	1/2"	1000	101	1.030 - 1.050	.820 - .840
165085	3/4"	700	136	1.290 - 1.315	1.041 - 1.066
165090	1"	500	51	1.290 - 1.315	1.041 - 1.066

Standard Color Gray

\* Also available in 1,000 ft. & 800 ft. reels, respectively.



We build tough products for tough environments®

Toll Free: 1-800-463-9572