


**PRODUCT SPECIFICATIONS**

14 AWG / 4 Conductor Oxygen Free Copper Speaker Wire Stranded

COMPLIANCE			
RoHS	c(UL)us Listed		
SPECIFICATIONS			
NEC/(UL) Specification CL3			
C(UL) Specification CM			
EU Directive 2002/95/EC (RoHS)			
CERTIFICATIONS			
UL Listed Type CL3			
C(UL) Type CM			
PHYSICAL SPECIFICATIONS	ELECTRICAL CHARACTERISTICS		
Color Code	Black, Red, White, Green	Capacitance (Pf/m)	67.2605
Conductor Material	Stranded OFC	Nominal Velocity of Propagation VP	66%
AWG	14	Nominal Conductor DC Resistance DCR@20°C (ohm/km)	8.2025
Conductor Diameter (mm)	0.16	Maximum Operating Voltage-UL (Voltage)	300 V
Conductor Stranding	105	Max Recommended Current (per conductor @ 25°C)	13 Amps
Insulating Material Type	PVC	MECHANICAL CHARACTERISTICS	
Insulation Average Thickness (mm)	0.35	Operating Temperature Range	-20°C to 60°C
Insulation Diameter (±0.05 mm)	2.6	Max. Recommended Pulling Tension	925.226 N
Jacket Color	White	Minimum Bending Radius / Minor Axis (mm)	79.20
Jacket Average Thickness (mm)	0.6	PART NUMBER	LENGTH
Jacket Material Type	PVC	AW144-03681	500 ft Spool
Out Diameter (±0.05 mm)	7.2		
Ripcord	Nylon		
Total Cable Weight (lbs / 500 ft)	42		

Cross Section:

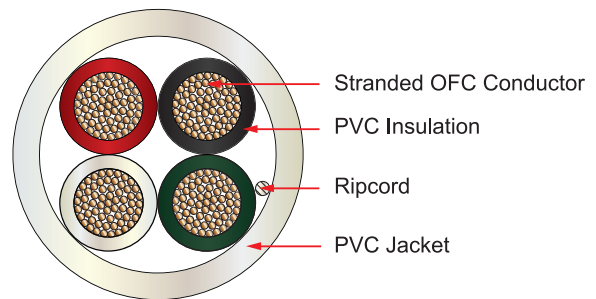

CABLE MARKING
VERICOM OFC SPEAKER CABLE 14 AWG 4C (UL) E364604-T CL3 75C RoHS 000FT USED / 500 FT REMAINING

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20170804.2