

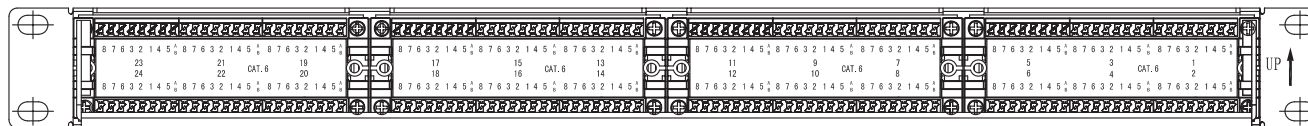





PRODUCT SPECIFICATIONS
CAT6 Unshielded Patch Panel 24 Port

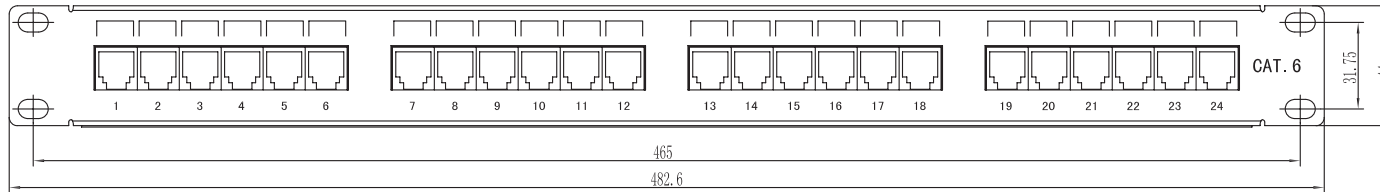

Tolerance:	SCALE:
X. ±0.5	FREE
.X ±0.3	UNIT:
.XX ±0.10	mm
Angle:	REV.:
X° ±3'	00
.X° ±1'	

Specification:

Material:

1. Metal frame: SPCC.
2. Plastic Housing :ABS
3. RJ45 contact material & finished:
 - 3-1. Phosphor Bronze with Nickel plated.
 - 3-2. Contact area : Gold plated.

4. IDC Housing: PC

5. IDC Terminal material & finished:

- 5-1. Phosphor Bronze with Tin plated.
- 5-2. Krone & 110 tool compatible.
- 5-3. Suitable for 22-26 AWG stranded and solid wire.

Performance:

- a. The sticker color codes combine two wirings of T568A & T568B.
- b. Insertion Force: 900 gms for 8 contacts.
- c. Retention Strength: 7.7 kgs between Jack and Plug.
- d. Operation Temperature: -30° to 60°.

e. Durability:

- e-1. Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
- e-2. IDC : Max. 200 punching times.
- f. The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard.

VERICOM PART NUMBER	GENERIC PART NUMBER	AVAILABLE COLOR
MPP6U-01361	MPP6U-02439	Black

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Rev.20150210.1

© 2015 VERICOM Global Solutions