



# Cast Secondary Bonding Lug – LPA555



- Cast terminal bonding lug with two bolt tension on secondary conductors
- Use to connect metal objects such as ladders and drains to lightning protection system

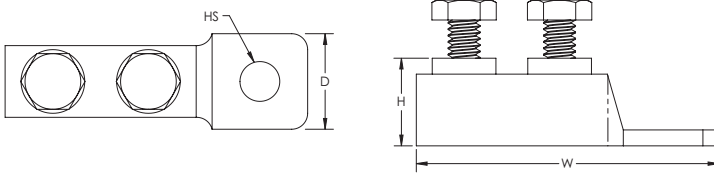

Part Number	LPA555
Conductor Size, UL	Secondary
Material	Aluminum
Finish	Bare
Hole Size (HS)	3/8"
Depth [D]	3/4"
Height (H)	0.78"
Width (W)	2 3/8"
Unit Weight	0.09 lb
Certifications	UL
Standard Packaging Quantity	1 pc
UPC	78285642472
EAN-13	8711893096866

For use with secondary bonding cables and wires up to 0.3" (7.62 mm) in diameter.

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

#### WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at [erico.pentair.com](http://erico.pentair.com) and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2017 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.