

# Type 1, 3, & 3R Enclosures

## Panel Enclosures Type 1 Large Data Sheet

Type 1, 3, & 3R Enclosures



### Application

- Houses electrical controls and instruments in an environment which does not require oil and dust tight specifications
- Protects against contact with enclosed equipment

### Standards

- UL 50 Listed, Type 1
- CSA C22.2 No. 40 certified, Type 1
- Conforms to NEMA Standard for Type 1

### Finish

- Wash and phosphate undercoat
- ANSI 61 gray polyester powder finish
- Optional panels have a white polyester powder finish

### Accessories

- Panels
- Terminal blocks
- Type 1 flush lock
- Swing panel kits
- Window kits
- Touch-up paint

### Construction

- Enclosure and door are fabricated from (14) gauge steel
- Enclosure body has mounting holes on the back which are accessible with or without the optional panel installed
- Door is secured to the body with a heavy-duty continuous hinge on one side and slotted flush latches on the opposite side
- Body has stiffener for extra rigidity
- Slotted flush latch is designed to operate with either a coin or a screwdriver
- .375-16 provisions for mounting optional panels
- No knockouts
- Ground stud provided on door

### Discount Schedule: C2


### Subclass: D80

**Notes:** We can provide special sizes, finishes and other modifications. Consult the factory for your special requirements.

## Panel Enclosures Type 1 Large Illustration Sheet and Catalog Number

Type 1, 3, &amp; 3R Enclosures

| Enclosure<br>Catalog Number | Enclosure Size<br>Height x Width x Depth<br>A x B x C |                  | Panel<br>Catalog Number | Panel Size<br>Height x Width |            |
|-----------------------------|---|------------------|-------------------------|------------------------------|------------|
|                             | in.   | mm               |                         | in.                          | mm         |
| 42309-1                     | 42.00 x 30.00 x 9.25                                  | 1067 x 762 x 235 | AW4230P                 | 38.87 x 26.87                | 987 x 682  |
| 42369-1                     | 42.00 x 36.00 x 9.25                                  | 1067 x 914 x 235 | AW4236P                 | 38.87 x 32.87                | 987 x 835  |
| 48369-1                     | 48.00 x 36.00 x 9.25                                  | 1219 x 914 x 235 | AW4836P                 | 44.87 x 32.87                | 1140 x 835 |
| 483611-1                    | 48.00 x 36.00 x 11.25                                 | 1219 x 914 x 286 | AW4836P                 | 44.87 x 32.87                | 1140 x 835 |
| 423013-1                    | 42.00 x 30.00 x 13.25                                 | 1067 x 762 x 337 | AW4230P                 | 38.87 x 26.87                | 987 x 682  |
| 423613-1                    | 42.00 x 36.00 x 13.25                                 | 1067 x 914 x 337 | AW4236P                 | 38.87 x 32.87                | 987 x 835  |
| 483613-1                    | 48.00 x 36.00 x 13.25                                 | 1219 x 914 x 337 | AW4836P                 | 44.87 x 32.87                | 1140 x 835 |
| 483617-1                    | 48.00 x 36.00 x 17.25                                 | 1219 x 914 x 438 | AW4836P                 | 44.87 x 32.87                | 1140 x 835 |

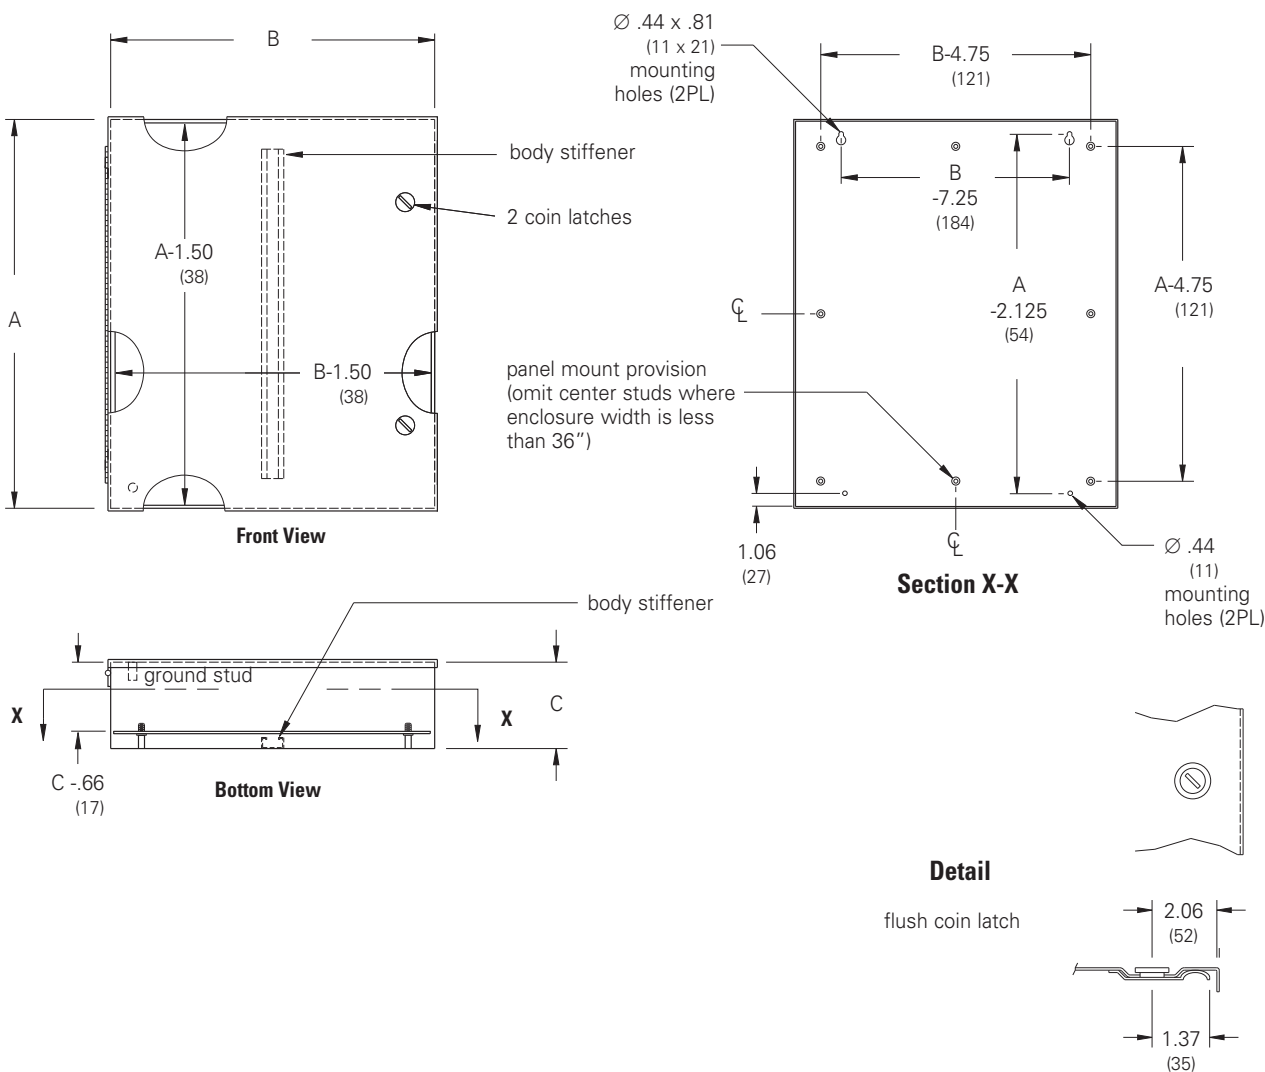

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.