



Specifier's Reference

Project
Type
Model No.
Comments

codes and standards

- UL listed to Standard 924
- NFPA 70 (National Electric Code)
- NFPA 101 (Life Safety Code)
- California Energy Commission
- UL listed for damp location

construction

- White housing only.
- Low profile, snap-together quick mount design.
- Flame rated, UV stable thermoplastic housing.

installation

- Universal wall/ceiling/end mounting.
- Canopy not required for flat wall mount. (electronics contained inside housing).
- Pop-out chevron directional indicators are easily removed when required.
- Exit sign mounts to a standard 4" square outlet box. (canopy provided)
- All exits signs are provided with an extra stencil face plate for double face sign applications.

electronics

- 120/277 VAC selectable input.
- VE Units: AC Only
Input Power: 0.026A (120VAC)
Input Power: 0.012A (277VAC)
- VE Units: Emergency
Input Power: 0.033A (120VAC)
Input Power: 0.017A (277VAC)
- Surge protection, low voltage disconnect, AC lockout installation, brown out protection, and constant current charger.

battery

- VE Exits contain 6V maintenance free nickel cadmium battery with a service life of 8 to 10 years and a operating temperature range of 20°F (-7°C) to 104°F (40°C).
- Provides 90 minutes of emergency illumination.

lamps

- Bright red or green energy efficient LED lamps. Uniform 6" letter illumination (3/4" stroke).

warranty

- Three year warranty on unit.

Green Product Choice: VERWEM

Exit Signs Catalog Number	Letter Color	Housing Color	Operation
VERW	Red	White	AC only
VEGW	Green	White	AC only
VERWEM	Red	White	Emergency (nicad battery)
VEGWEM	Green	White	Emergency (nicad battery)

Accessories

- **VEPMC** – Pendant mount canopy, white, (requires stem assembly).
- **PVS2** – Polycarbonate shield
- **WG4** – Wire guard
- **CXPA12W** – Pendant assembly, Rigid canopy, 12" white stem (requires VEPMC).
- **CXPAS12W** – Pendant assembly, Swivel white canopy, 12" white stem (requires VEPMC).

Stem lengths available: 18" 24", 30", 36", 48", and 60"


Note:

All exit signs are universal (single face with an extra stencil face plate)
Canopy provided on all exits.




dimensions

VE

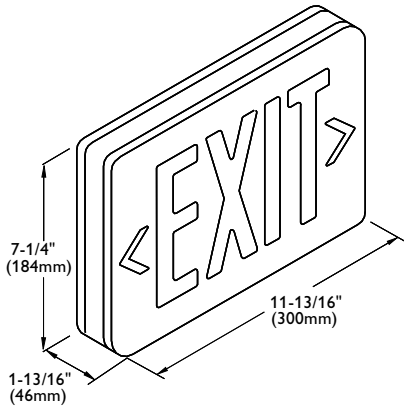

Canopy



© 2017 Philips Lighting Holding B.V. All rights reserved.
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.
philips.com/luminaires



Philips Lighting North America Corporation
200 Franklin Square Drive, Somerset, NJ 08873
Tel. 855-486-2216

Philips Lighting Canada Ltd.
281 Hillmount Rd, Markham, ON, Canada L6C 2S3
Tel. 800-668-9008