



4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Remodel Housing designed for use in non-insulated areas

- Shallow housing construction allows for fit in 2 x 6 construction
- Juno Type TC fixtures are designed for installations where housing and J-Box will not come into contact with insulation
- Blinking light after installation indicates that improper bulb or trim is being used or that fixture has been improperly covered with insulation
- In U.S., insulation must be spaced 3" away from the housing and J-Box
- TC Remodel Housing for remodel application where back side of ceiling is not accessible
- Installs through an opening in the ceiling from below
- Secured in place by factory installed screw driven remodel clamps for easy installation into ceiling material.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Detachable medium base porcelain with nickel-plated copper screw shell.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for U.S. and Canada through-branch wiring and damp locations

- Product thermally protected against improper use of insulation
- UL/cUL Listed
- Trim No. 11, 12, 12SQ, 4101, 4102, V4012 and V4041 are wet location approved for covered ceiling applications
- Trims 14, 17, 17SQ, V4017 and V4034 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL/cUL listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out)

- Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire
- Knockouts equipped with pryout slots
- Supplied with push-in electrical connectors for fast installation.

Housing TC housing, 22-gauge steel with white finish

- Remodel clamps provided with #2 Quadrex drive screws (#2 Robertson/#2 Phillips combo)
- Clamps accommodate up to a 5/8" ceiling thickness.



PRODUCT CODES

| Catalog No. | Input Voltage | Lamp Types |
|-------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| TC1RC W N | 4" Incandescent Remodel Clamp Style Non-IC Housing | 120V PAR20/PAR16 Medium Base, MR16/PAR16/ES16 GU10 Base (See reverse for Trim/Lamp/Max. Wattage Ratings) |

Housing and trim can be ordered together or separate, but will always ship separately.



DIMENSIONS

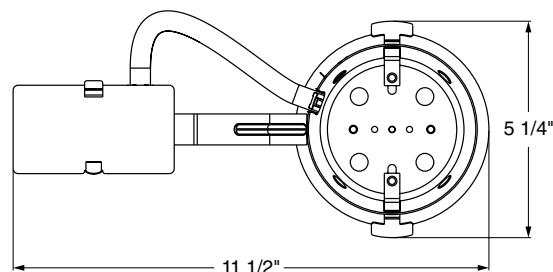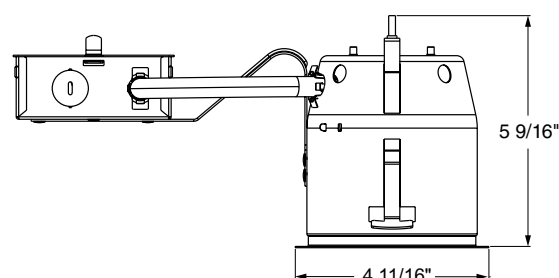

4 3/8" CEILING CUTOUT

ACCESSORIES

| Catalog No. | Description |
|-------------|--------------------|
| GU10WHIP | GU10 Socket Whip |
| SMPLT4 | 4" Housing Locator |

















To order, specify catalog number.

4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

ROUND TRIMS/ LAMPS

| | Cat. No. | Description | Max. Lamp Rating |
|-------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | 13 WH | 4" Downlight Pinhole with Integral Shield Trim - White | 50W PAR20 |
| | 14 BWH ♦♦ | 4" Downlight Baffle Trim - Black Baffle, White Trim Ring | |
|  | 14 BSC ♦♦ | 4" Downlight Baffle Trim - Black Baffle, Satin Chrome Trim Ring | 50W PAR20 |
| | 14 BABZ ♦♦ | 4" Downlight Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring | |
| | 14 BBL ♦♦ | 4" Downlight Baffle Trim - Black Baffle, Black Trim Ring | |
| | 14 WWH ♦♦ | 4" Downlight Baffle Trim - White Baffle, White Trim Ring | |
| | 17 CWH ♦♦ | 4" Downlight Cone Trim - Clear Alzak® Cone, White Trim Ring | 50W PAR20 |
|  | 17 GWH ♦♦ | 4" Downlight Cone Trim - Gold Cone, White Trim Ring | |
| | 17 BWH ♦♦ | 4" Downlight Cone Trim - Black Cone, White Trim Ring | |
| | 17 PTSC ♦♦ | 4" Downlight Cone Trim - Pewter Cone, Satin Chrome Trim Ring | |
| | 17 WWH ♦♦ | 4" Downlight Cone Trim - White Cone, White Trim Ring | |
| | 17 HZWH ♦♦ | 4" Downlight Cone Trim - Haze Cone, White Trim Ring | |
| | 17 WHZWH ♦♦ | 4" Downlight Cone Trim - Wheat Haze Cone, White Trim Ring | |
| | 17 WHZABZ ♦♦ | 4" Downlight Cone Trim - Wheat Haze Cone, Classic Aged Bronze Trim Ring | |
| | 10 WH | 4" Flush Gimbal Ringed - White | 50W PAR20 |
|  | 10 BL | 4" Flush Gimbal Ringed - Black | |
| | 10 SC | 4" Flush Gimbal Ringed - Satin Chrome | |
| | 10 ABZ | 4" Flush Gimbal Ringed - Classic Aged Bronze | |
|  | 18 WH | 4" Adjustable Mini Eyeball Trim - White | 60W PAR16 |
| | 18 SC | 4" Adjustable Mini Eyeball Trim - Satin Chrome | |
|  | 440 WH | 4" Adjustable Flush Gimbal Ring Trim - White | 50W MR16, PAR16, ES16 120V GU10 Base (Requires GU10WHIP) |
| | 440 BL | 4" Adjustable Flush Gimbal Ring Trim - Black | |
| | 440 SC | 4" Adjustable Flush Gimbal Ring Trim - Satin Chrome | |
| | 440 ABZ | 4" Adjustable Flush Gimbal Ring Trim - Classic Aged Bronze | |
|  | 445 WH | 4" Adjustable Slot Aperture Trim - White | 50W MR16, PAR16 ES16 120V GU10 Base (Requires GU10WHIP) |
|  | 448 WH | 4" Adjustable Eyeball with Black Baffle Trim - White | 50W MR16, PAR16 |
| | 448 SC | 4" Adjustable Eyeball with Black Baffle Trim - Satin Chrome | ES16 120V GU10 Base (Requires GU10WHIP) |
|  | 11 WH ♦ | 4" Lensed Drop Opal Trim - White | 50W PAR20 |
|  | 12 WWH ♦ | 4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Classic Aged Bronze Trim Ring | 50W PAR20 |
| | 12 WSC ♦ | 4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Satin Chrome Trim Ring | |
| | 12 WABZ ♦ | 4" Frosted Lens with Clear Center Trim - White, White Trim Ring | |
|  | 446 WH | 4" Wall Wash Adjustable Scoop Trim - White | 50W MR16, PAR16 ES16 120V GU10 Base (Requires GU10WHIP) |
|  | 4101 WH ♦ | 4" Decorative Beveled Dome Lens Trim - White | 50W PAR20 |
| | 4101 SC ♦ | 4" Decorative Beveled Dome Lens Trim - Satin Chrome | |
| | 4101 ABZ ♦ | 4" Decorative Beveled Dome Lens Trim - Classic Aged Bronze | |
|  | 4102 WH ♦ | 4" Decorative Beveled Lensed Trim - White | 50W PAR20 |
| | 4102 SC ♦ | 4" Decorative Beveled Lensed Trim - Satin Chrome | |
| | 4102 ABZ ♦ | 4" Decorative Beveled Lensed Trim - Classic Aged Bronze | |
|  | 4103 FROSTWH | 4" Decorative Beveled Cylinder Trim - Frosted Glass, White Trim Ring | 50W PAR20 |
| | 4103 FROSTSC | 4" Decorative Beveled Cylinder Trim - Frosted Glass, Satin Chrome Trim Ring | |
|  | 4104 HZSC | 4" Decorative Beveled Cone Trim - Haze Cone, Satin Chrome Trim Ring | 50W PAR20 |
| | 4104 WHZABZ | 4" Decorative Beveled Cone Trim - Wheat Haze Cone, Classic Aged Bronze Trim Ring | |
|  | 4150 MESHSC | 4" Decorative Glass Cylinder Trim - Mesh Glass, Satin Chrome Trim Ring | 50W PAR20 |

4" TC REMODEL HOUSING





INCANDESCENT LAMPS

TC1RC

SQUARE TRIMS/ LAMPS

| | Cat. No. | Description | Max. Lamp Rating |
|-----------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------|----------------------------------------------------------------|
|  | 175Q BWH ♦♦ | 4" Square Downlight Trim - Black, White Trim Ring | 50W PAR20 |
| | 175Q WWH ♦♦ | 4" Square Downlight Trim - White, White Trim Ring | |
| | 175Q HZWH ♦♦ | 4" Square Downlight Trim - Haze, White Trim Ring | |
| | 175Q WHZWH ♦♦ | 4" Square Downlight Trim - Wheat Haze, White Trim Ring | |
|  | 135Q WH | 4" Square Pinhole Trim - White | 50W PAR20 |
|  | 4405Q WH | 4" Square Flush Gimbal Trim - White | 50W MR16 |
| | 4405Q BL | 4" Square Flush Gimbal Trim - Black | 120V GU10 Base (Requires GU10WHIP, 35° Vertical Adjustment) |
|  | 125Q WWH ♦ | 4" Square Frosted Lens with Clear Center Trim - White, White Trim Ring | 50W PAR20 |

VULITE TRIMS/ LAMPS

| | Cat. No. | Description | Max. Lamp Rating |
|-------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------|------------------------------------------------------------------|
|  | V4034 BWH ♦♦ | 4" Baffle - Black, White Trim Ring | 50W PAR20 |
| | V4034 WWH ♦♦ | 4" Baffle - White, White Trim Ring | |
|  | V4017 CWH ♦♦ | 4" Cone - Clear Alzak, White Trim Ring | 50W PAR20 |
|  | V4010 WH | 4" Gimbal Ring - White Trim Ring | 50W PAR20 |
| | V4010 BN | 4" Gimbal Ring - Brushed Nickel Trim Ring | |
|  | V4018 WH | 4" Eyeball - White Trim Ring | 60W PAR16 |
|  | V4012 WH | 4" Stippled Opal Lens Shower With Reflector - White Trim Ring | 50W PAR20 |
|  | V4040 WH | 4" Gimbal Ring - White Trim Ring | 50W MR16 PAR16, ES16 120V GU10 Base (Requires GU10WHIP) |
| | V4040 BN | 4" Gimbal Ring - Brushed Nickel Trim Ring | |
|  | V4041 WH | 4" Stippled Lens Ring - White Trim Ring | 50W MR16 PAR16, ES16 120V GU10 Base (Requires GU10WHIP) |
|  | V4048 WH | 4" Low Voltage Eyeball with Baffle - White Trim Ring | 50W MR16 PAR16, ES16 120V GU10 Base (Requires GU10WHIP) |
|  | GU10WHIP | GU10 Socket Whip | |

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.

Trim Size: 5" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.