


nVent CADDY Pyramid H-Frame Kit – PHKR



- Foam or rubber bottom offers low abrasion interface for better roof membrane protection
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Provides superior load distribution, even with varying rooftop surfaces
- Rubber rooftop interface ideal for solar panel array installations
- Kit includes 2 post bases with pre-installed mounting hardware, 6 bolts, 6 strut nuts, and 2 L-brackets to complete H-frame
- Hot-dip galvanized and UV stabilized for long lasting performance
- Accepts standard strut channels
- Supports green building requirements; thermoplastic bases are made from recycled material and can contribute to earning LEED credits

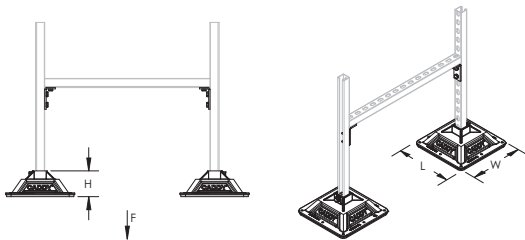

Part Number	PHKR
Material	Polypropylene Polyethylene
Temperature	-30 to 130 °F
Static Load Safety Factor	3:1
Rooftop Interface	Rubber
Strut Type	A (1 5/8" x 1 5/8")
Height (H)	4.66"
Length (L)	12 3/8"
Width (W)	12 3/8"
Surface Area	287 in ²
Static Load (F)	1,500 lb
Certifications	ITB
Standard Packaging Quantity	1 pc
UPC	78285684531
EAN-13	8711893108323

Static load represents 750 lb (3,335 N) per post base. The end user must select and evaluate the strut framing to ensure the assembled H-frame can properly support the applied load.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2020 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

